

## **MEF EMC-FILTER 1-PHASE 1-STAGE**

I:10A U:250 VAC/300 VDC snap on

Art.No.: 10415 Weight: 0.312 Country of origin: IT


Model designation: MEF 1/1 10A T


Current: 10 A DIN-rail mountable for universal applications Attenuation curves on request.

## **Link to Product**

## Illustration



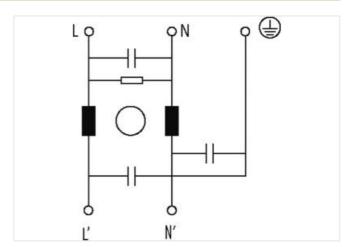

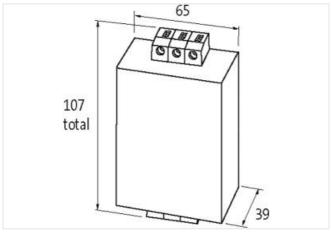

Product may differ from Image







Commercial data		
ECLASS-6.0	27130806	
ECLASS-6.1	27420201	
ECLASS-7.0	27420290	

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-04-29



stay connected

ECLASS-8.0	27420290
ECLASS-9.0	27420290
ECLASS-10.1	27420290
ECLASS-11.1	27420290
ECLASS-12.0	27420290
ETIM-5.0	EC002498
customs tariff number	85363010
customs tariff number	85363010 85363010
GTIN	4048879029407
GTIN	4048879029407
Packaging unit	1
	<u> </u>
Packaging unit	
Electrical data	
Leakage current max.	5 mA @ 250 V AC, 50 Hz
Electrical data   Supply	
Power frequency	50 60 Hz
Operating voltage AC max.	250 V
Operating voltage DC max.	300 V
Electrical data   Output	
Overload current	18× (IN t) max. 0.5 ms; 1.5× (IN t) max. 1 min. (1× per hour)
Installation	(y
Connection cross-section solid min.	0,2 mm²
Connection cross-section solid max.	6 mm <sup>2</sup>
Connection cross-section stranded/fine- stranded min.	0,2 mm²
Connection cross-section stranded/fine- stranded max.	4 mm²
AWG number solid min.	24
AWG number solid max.	9
AWG number stranded/fine stranded min.	24
AWG number stranded/fine stranded max.	11
Device protection   Electrical	
Duration insulation test voltage	2 s
Insulation test voltage L-L	2,1 kV
Insulation test voltage L-N	2,7 kV
Mechanical data   Mounting data	
	gazahnanat
Mounting method	geschnappt Mauring rail TLIGE (EN CO71E)
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Height	107 mm
Width	56 mm
Depth  Environmental characteristics   Climatic	39 mm
Climatic category (EN IEC 60068-1)	25/085/21
Connection type 3	
Connection	Screw terminals SK
Family construction form	terminal
Color contact carrier	yellow
No. of poles	1
PIN 1	PE
Connection	Screw terminals SK
Family construction form	terminal
Color contact carrier	gray
	עדיים

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-04-29



No. of poles	2
PIN 1	L
PIN 2	N
Connection	Screw terminals SK
Family construction form	terminal
Color contact carrier	gray
No. of poles	2
PIN 1	L'
PIN 2	N'