

MIRO,TR,48VDC,SK OPTO-COUPLER MODULE

IN: 10...48 VDC - OUT: 5...48 VDC / 2 A

Art.No.: 52501 Weight: 0.028 Country of origin: CZ


Model designation: MIRO,TR,48VDC,SK


Transistor 2 A 24 V DC Screw terminals


Link to Product

Illustration



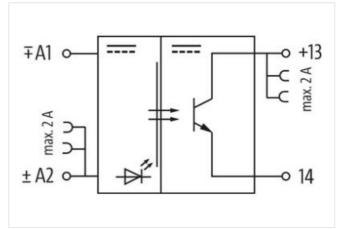

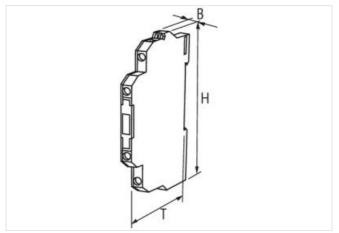

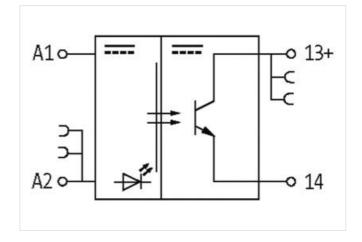

Product may differ from Image









Commercial data		
ECLASS-6.0	27371604	
ECLASS-6.1	27371604	
ECLASS-7.0	27371604	
ECLASS-8.0	27371604	

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-04-20



stay connected

ECLASS-10.1 27371604 ECLASS-11.1 27371604 ECLASS-12.0 27371604 ETM-5.0 ECO1504 ETM-6.0 ECO01504 ETM-7.0 ECO01504 ETM-7.0 ECO01504 ETM-7.0 ECO01504 ETM-8.0 ECO01504 ETM-8.0 ECO01504 ETM-8.0 ECO01504 ETM-8.0 ECO01504 Customs tariff number 85414900 customs tariff number 85414900 GTIN 4048879026932 GTIN 4048879026932 Packaging unit 1 Packaging unit 1 Packaging unit 1 Pelectrical data input Input voltage DC min. 10 V Input voltage DC min. 10 V Input voltage OFF DC min. 0 V Input voltage OFF DC min. 0 V Input voltage OFF DC min. 5 V Current input DC 7 mA Electrical data Output Switch ing fidelay max. 5 ms Switching frequency inductive max. 1 Hz Switching frequency onthic max. 10 Hz Voltage switching DC min. 5 V Voltage switching DC min. 5 V Switching frequency onthic max. 10 Hz Voltage mytching DC max. 48 V Switching frequency onthic max. 10 Hz Voltage mytching DC min. 5 V Switching current min. 1 mA Switching current min. 2 A Voltage or p DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing black	
ECLASS-12.0 27371604 ETIM-5.0 EC001504 ETIM-5.0 EC001504 ETIM-7.0 EC001504 ETIM-7.0 EC001504 ETIM-8.0 EC001504 customs tariff number 85414900 customs tariff number 85414900 GTIN 4048879026932 GTIN 4048879026932 GTIN 4048879026932 GTIN 1 Packaging unit 1 Packaging unit 1 Packaging unit 1 Peckaging unit 1 Input voltage DC max. 10 V Input voltage DC max. 48 V Input voltage DF DC min. 0 V Input voltage DF DC max. 5 V Current input DC 7 mA Electrical data Output Switch off delay max. 5 ms Switch off delay max. 1 ms Switch off delay max. 1 ms Switching frequency inductive max. 1 Hz Switching frequency prinductive max. 1 Hz	
ETIM-5.0 EC001504 ETIM-6.0 EC001504 ETIM-7.0 EC001504 ETIM-8.0 EC001504 customs tariff number 85414900 customs tariff number 85414900 GTIN 4048879026932 GTIN 4048879026932 GTIN 4048879026932 Packaging unit 1 Electrical data Input Input voltage DC min. 10 V Input voltage DC max. 48 V Input voltage OFF DC max. 5 V Current input DC 7 mA Electrical data Output Switch off delay max. 5 ms Switch off delay max. 1 ms Switching requency obmic max. 1 ms Switching requency obmic max. 10 Hz Switching requency obmic max. 10 Hz Switching Corrent min. 5 V Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 3 V Diagnostics Status indication LED ye	
ETIM-6.0 EC001504 ETIM-7.0 EC001504 ETIM-8.0 EC001504 customs tariff number 85414900 customs tariff number 85414900 GTIN 4048879026932 GTIN 4048879026932 Packaging unit 1 Packaging unit 1 Electrical data input Input voltage DC min. 10 V Input voltage DC max. 48 V Input voltage OFF DC max. 5 V Current input DC 7 mA Electrical data Output Switch off delay max. 5 ms Switch on delay max. 1 ms Cuisscent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching frequency offici max. 10 Hz Voltage switching DC min. 5 V Switching current min. 1 MA Switching current min. 2 A Voltage drop DC max. 48 V Switching current max. 2 A Voltage drop DC max. 0,3 V Diagn	
ETIM-7.0 EC001504 ETIM-8.0 EC001504 customs tariff number 85414900 customs tariff number 85414900 GTIN 4048879026932 GTIN 4048879026932 GTIN 4048879026932 Packaging unit 1 Packaging unit 1 Packaging unit 1 Electrical data Input Input voltage DC min. 10 V Input voltage DC max. 48 V Input voltage OFF DC min. 0 V Input voltage OFF DC min. 0 V Input voltage OFF DC max. 5 V Current input DC 7 mA Electrical data Output Switch off delay max. 1 ms Quiescent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching frequency ohmic max. 10 Hz Voltage switching DC min. 5 V Switching current min. 1 mA Switching current max. 2 A Voltage off DC max. 3,0 V Diagnostics Status indication LED yellow Device protection Electrical Flame resistance flame retardant Material housing Plastic	
ETIM-8.0 EC001504 customs tariff number 85414900 customs tariff number 85414900 GTIN 4048879026932 GTIN 4048879026932 Packaging unit 1 Electrical data Input Input voltage DC min. 10 V Input voltage DC max. 48 V Input voltage OFF DC min. 0 V Input voltage OFF DC max. 5 V Current input DC 7 mA Electrical data Output Switch off delay max. 5 ms Switch off delay max. 1 ms Quiescent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching frequency inductive max. 1 Hz Switching voltage DC max. 48 V Switching current min. 5 V Switching current min. 1 mA Switching current min. 1 mA Switching current min. 1 mA Switching Current min. 2 A Voltage drop DC max. 0,3 V Diagnostics	
customs tariff number 85414900 customs tariff number 85414900 GTIN 4048879026932 GTIN 4048879026932 Packaging unit 1 Packaging unit 1 Electrical data Input Input voltage DC min. 10 V Input voltage DF DC min. 0 V Input voltage OFF DC min. 0 V Input voltage OFF DC max. 5 V Current input DC 7 mA Electrical data Output Switch off delay max. 5 ms Switch on delay max. 1 ms Quiescent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching frequency ohmic max. 10 Hz Voltage switching voltage DC min. 5 V Switching voltage DC max. 48 V Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Flame resistance flame retardant	
customs tariff number 85414900 GTIN 40488790269932 GTIN 40488790269932 Packaging unit 1 Packaging unit 1 Electrical data Input Input voltage DC min. 10 V Input voltage OFF DC min. 0 V Input voltage OFF DC max. 5 V Current input DC 7 mA Electrical data Output Switch off delay max. 5 ms Switch off delay max. 1 ms Quiescent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching requency obmin max. 10 Hz Voltage switching DC min. 5 V Switching urrent min. 5 V Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant <t< td=""><td></td></t<>	
GTIN 4048879026932	
GTIN 4048879026932 Fackaging unit 1 1 1 1 1 1 1 1 1	
Packaging unit	
Packaging unit	
Packaging unit 1 Electrical data Input Input voltage DC min. 10 V Input voltage DC max. 48 V Input voltage OFF DC min. 0 V Input voltage OFF DC max. 5 V Current input DC 7 mA Electrical data Output Switch off delay max. 5 ms Switch on delay max. 1 ms Quiescent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching frequency offmic max. 10 Hz Voltage switching DC min. 5 V Switching voltage DC max. 48 V Switching current min. 1 mA Switching current max. 2 A Voltage orp DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Electrical data Input Input voltage DC min. 10 V Input voltage DC max. 48 V Input voltage OFF DC min. 0 V Input voltage OFF DC max. 5 V Current input DC 7 mA Electrical data Output Switch off delay max. 5 ms Switch on delay max. 1 ms Quiescent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching frequency ohmic max. 10 Hz Switching frequency ohmic max. 10 Hz Switching voltage DC min. 5 V Switching ourrent min. 1 mA Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Machanical data Material data Material housing Plastic	
Input voltage DC min. 10 V Input voltage DC max. 48 V Input voltage OFF DC min. 0 V Input voltage OFF DC max. 5 V Current input DC 7 mA Electrical data Output Switch off delay max. 5 ms Switch on delay max. 1 ms Quiescent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching frequency ohmic max. 10 Hz Switching frequency ohmic max. 10 Hz Switching DC min. 5 V Switching output DC max. 48 V Switching output min. 1 mA Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Machanical data Material data Material housing Plastic	
Input voltage DC max.	
Input voltage OFF DC min. 0 V Input voltage OFF DC max. 5 V Current input DC 7 mA Electrical data Output Switch off delay max. 5 ms Switch on delay max. 1 ms Quiescent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching frequency ohmic max. 10 Hz Voltage switching DC min. 5 V Switching voltage DC max. 48 V Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing PA Switching place in put in p	
Input voltage OFF DC max. 5 V Current input DC 7 mA Electrical data Output Switch off delay max. 5 ms Switch on delay max. 1 ms Quiescent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching frequency ohnic max. 10 Hz Voltage switching DC min. 5 V Switching voltage DC max. 48 V Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Current input DC 7 mA Electrical data Output	
Electrical data Output Switch off delay max. 5 ms Switch on delay max. 1 ms Quiescent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching frequency ohmic max. 10 Hz Voltage switching DC min. 5 V Switching voltage DC max. 48 V Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Switch off delay max. 5 ms Switch on delay max. 1 ms Quiescent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching frequency ohmic max. 10 Hz Voltage switching DC min. 5 V Switching voltage DC max. 48 V Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Switch on delay max. 1 ms Quiescent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching frequency ohmic max. 10 Hz Voltage switching DC min. 5 V Switching voltage DC max. 48 V Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Quiescent current OFF max. 0,01 mA Switching frequency inductive max. 1 Hz Switching frequency ohmic max. 10 Hz Voltage switching DC min. 5 V Switching voltage DC max. 48 V Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Switching frequency inductive max. Switching frequency ohmic max. 10 Hz Voltage switching DC min. 5 V Switching voltage DC max. 48 V Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Switching frequency ohmic max. Voltage switching DC min. 5 V Switching voltage DC max. 48 V Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Voltage switching DC min. 5 V Switching voltage DC max. 48 V Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Switching voltage DC max. 48 V Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Switching current min. 1 mA Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Switching current max. 2 A Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Voltage drop DC max. 0,3 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Device protection Media Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Flame resistance flame retardant Mechanical data Material data Material housing Plastic	
Mechanical data Material data Material housing Plastic	
Material housing Plastic	
Color housing black	
Old House	
Mechanical data Mounting data	
Mounting method geschnappt	
Suitable for mounting type mounting rail, (EN 60715)	
Height 78 mm	
Width 6,2 mm	
Depth 70 mm	
Environmental characteristics Climatic	
Operating temperature min20 °C Operating temperature max. 60 °C	
Connection type 4	



Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	13 +
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	14
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	A1
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	A 2