

MIIW ANALOG COUPLER COMPONENT

IN: (0)4..20 mA - OUT: (0)4..20 mA


Art.No.: 6644226 Weight: 0.171 Country of origin: CZ Model designation: MIW 0/4-20MA-->0/4-20MA FEDERKRAF


INPUT: 0...20 mA OUTPUT: 0...20 mA Spring clamp terminals Input and output galvanically separated

Link to Product





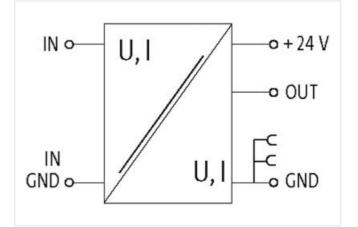

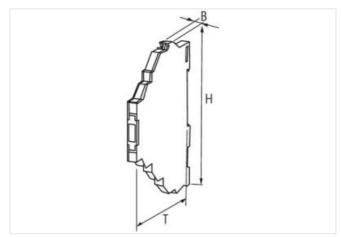

Product may differ from Image



Commercial data

ECLASS-6.0	27210990	
ECLASS-6.1	27210902	
ECLASS-7.0	27210902	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-05-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com



ECLASS-8.0	27210902
ECLASS-9.0	27210902
ECLASS-10.1	27210902
ECLASS-11.1	27210902
ECLASS-12.0	27210902
ETIM-5.0	EC002477
customs tariff number	85437090
customs tariff number	85437090
GTIN	4048879022453
GTIN	4048879022453
Packaging unit	1
Packaging unit	1
Electrical data	
Accuracy (of full scale)	0,5 %
Electrical data Supply	
Operating voltage DC	24 V
Operating voltage DC min.	19,2 V
Operating voltage DC max.	28,8 V
Operating current min.	50 mA
Operating current max.	70 mA
Electrical data Input	
Working resistance max.	250 Ω
Electrical data Output	
Output current max.	0,025 A
Working resistance max.	500 Ω
Industrial communication	
Transmission frequency max.	500 Hz
Device protection Electrical	
Rated surge voltage	1,5 kV
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	91 mm
Width Depth	6,2 mm 70 mm
	70 11111
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	50 °C
Storage temperature min.	-40 °C
Storage temperature max.	80 °C
Connection type 5	
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles PIN 1	1 GD 1
Connection	Screw terminals SK
Family construction form	terminal
Gender No. of poles	female 1
PIN 1	In
prmation in this Product-PDE has been compiled with the	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-05-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com



Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	1
PIN 1	+ 24 V DC
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	1
PIN 1	Out
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	1
PIN 1	GD

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-05-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com