

Modlink MSDD-set: Frame 4000-68523-0000001,

insert 4000-68000-4120000

Art.No.: 4000-68523-4120001

Weight: 0.541


Country of origin: US

Model designation: MSDD_2metallic_GFCI 15A+2xRJ45+3A fuse_

with touch protection

[Link to Product](#)**Illustration**

Product may differ from Image

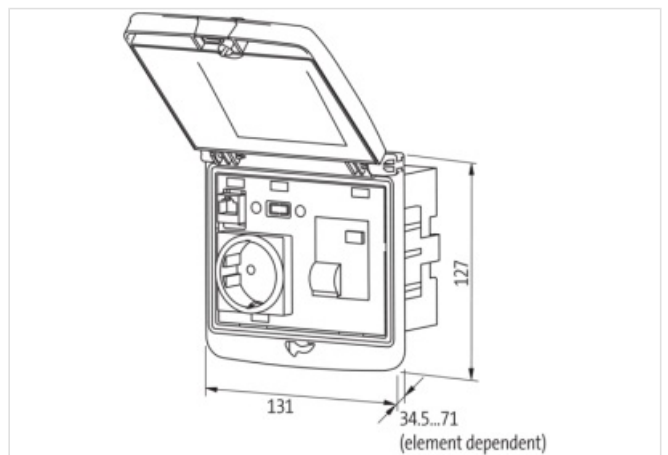

0
0
0
0
0
0
0

0

0

0

0

| Header | |
|---|---|
| Material short text | MSDD_2metallic_GFCI 15A+2xRJ45+3A fuse_ |
| Commercial data | |
| URL Webshop | https://shop.murrelektronik.com/4000-68523-4120001 |
| GTIN | 4048879477970 |
| ECLASS-6.0 | 27144001 |
| ECLASS-6.1 | 27189217 |
| ECLASS-7.0 | 27189217 |
| ECLASS-7.1 | 27189217 |
| ECLASS-8.0 | 27189217 |
| ECLASS-8.1 | 27189217 |
| ECLASS-9.0 | 27182806 |
| ECLASS-9.1 | 27189217 |
| ECLASS-10.0.1 | 27182806 |
| ECLASS-10.1 | 27182806 |
| ECLASS-11.0 | 27182806 |
| ECLASS-11.1 | 27182806 |
| ECLASS-12.0 | 27182806 |
| ECLASS-13.0 | 27182806 |
| ECLASS-14.0 | 27182806 |
| ETIM-5.0 | EC002625 |
| ETIM-6.0 | EC002625 |
| ETIM-7.0 | EC002625 |
| ETIM-8.0 | EC002625 |
| customs tariff number | 85366990 |
| EAN | 4048879477970 |
| Packaging unit | 1 |
| Mechanical data Mounting data | |
| Height | 88 mm |
| Width | 116 mm |
| Depth | 72 mm |
| Frame | |
| Material housing | PA |
| Color housing | black |
| Material lid | ABS |
| Color cover | metallic |
| Suitable for installation wall thickness min. | 1 mm |
| Suitable for installation wall thickness max. | 5 mm |
| Degree of protection (EN IEC 60529) | IP65 |
| Operating temperature min. | -30 °C |
| Operating temperature max. | 70 °C |
| Storage temperature min. | -30 °C |
| Fuse | |
| Operating voltage AC | 250 V |

| | |
|----------------------|------|
| Operating voltage DC | 32 V |
| Nominal current | 3 A |

USA

| | |
|-------------------------------|--------------------|
| Connection | Screw terminals SK |
| No. of poles | PE |
| Connections per pole | 2 |
| Protection contact present | yes |
| Connection cross section max. | 6 mm ² |
| AWG number max. | 10 |
| Operating voltage AC | 125 V |
| Operating current | 15 A |

RJ45

| | |
|---------------------------------------|-------------------|
| Family construction form | RJ45 |
| Looking techniques | Snap-in connector |
| Cable category min. | Cat5e |
| Family type Back side | RJ45 |
| Operating voltage AC max. (UL-listed) | 30 V |
| Operating voltage DC max. (UL-listed) | 42.4 V |
| Current operating max. (UL) | 175 mA |