

MSDD pass-through RJ45 CAT5e femal/femal, design silver

Art.No.: 4000-73000-0010000

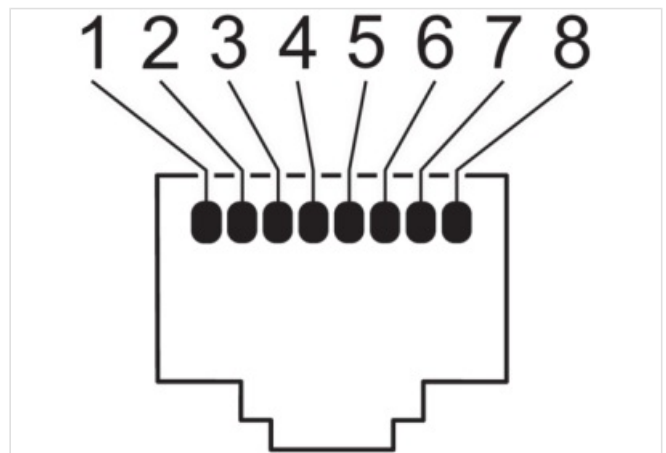
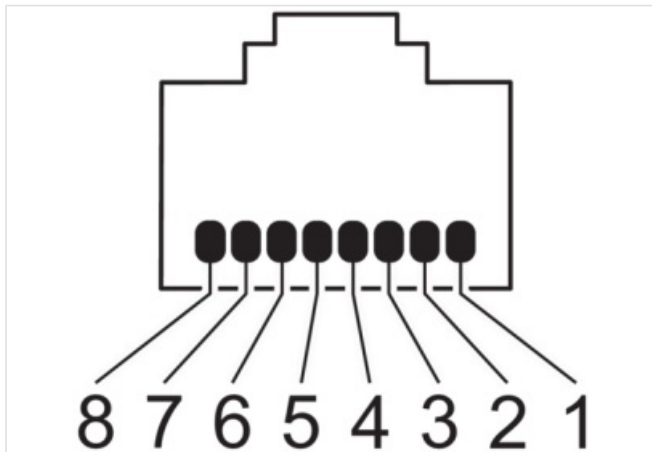
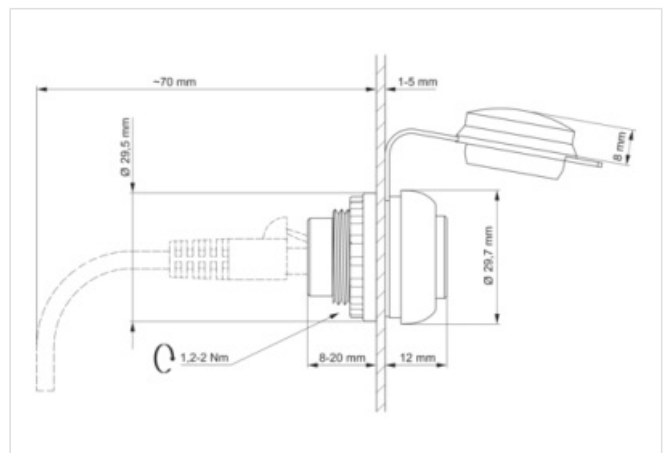
Weight: 0.018

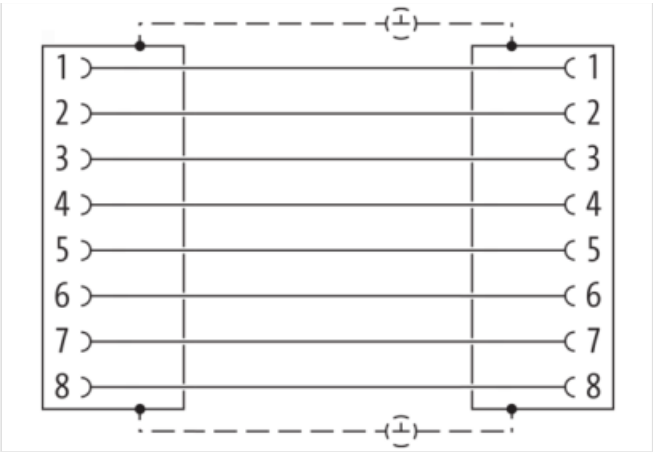
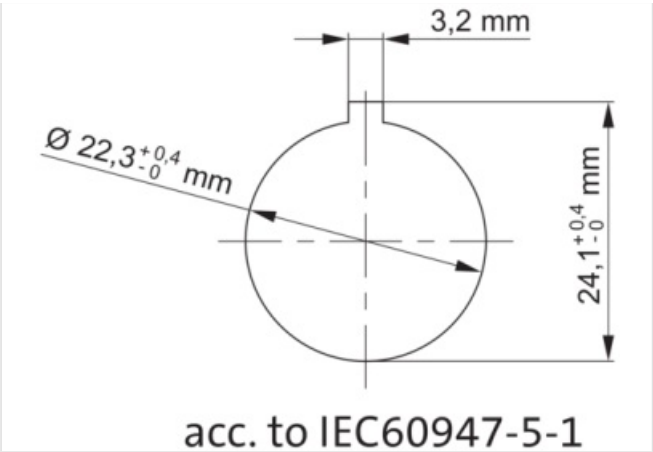
Country of origin: CZ

Model designation: MSDD PT22-S RJ45 CAT5e F/F

Pass-through

1 × RJ45, 8-pole CAT5e (female/female)

[Link to Product](#)**Illustration**



Product may differ from Image



Commercial data	
URL Webshop	https://shop.murrelektronik.com/4000-73000-0010000
GTIN	4048879031189
ECLASS-6.0	27143423
ECLASS-6.1	27143419
ECLASS-7.0	27440515
ECLASS-7.1	27440515
ECLASS-8.0	27440515
ECLASS-8.1	27440515
ECLASS-9.0	27440515
ECLASS-9.1	27440515
ECLASS-10.0.1	27440515
ECLASS-10.1	27440515
ECLASS-11.0	27440515
ECLASS-11.1	27440515
ECLASS-12.0	27440515
ECLASS-13.0	27440515
ECLASS-14.0	27440515
ETIM-5.0	EC002625
ETIM-6.0	EC002625
ETIM-7.0	EC002625
ETIM-8.0	EC002625
EAN	4048879031189
Electrical data Supply	
Operating voltage AC	24 V
Operating voltage DC	24 V
Operating current max.	1.5 A
Industrial communication	
Data transmission rate max.	1,000 MBit/s
Installation Connection	
Family construction form	RJ47
Gender	female
Gender Rear	female

Cable category min.	Cat5e
---------------------	-------

Device protection

Shielded	yes
----------	-----

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP20, IP65
-------------------------------------	------------

Protection NEMA	12, 3R, 4x, 4, 13, 2
-----------------	----------------------

Additional condition protection degree	in closed state, inserted
--	---------------------------

Device protection | Mechanical

Mechanical endurance	750 Cycles
----------------------	------------

Mechanical data | Mounting data

Depth	20 mm
-------	-------

Diameter	29.5 mm
----------	---------

Mounting depth	70 mm
----------------	-------

Diameter cutout	22.5 mm
-----------------	---------

Approvals

UL 50E	yes
--------	-----