

**MSDD pass-through RJ45 CAT5e femal/femal, design silver**

Art.No.: 4000-73000-0010000

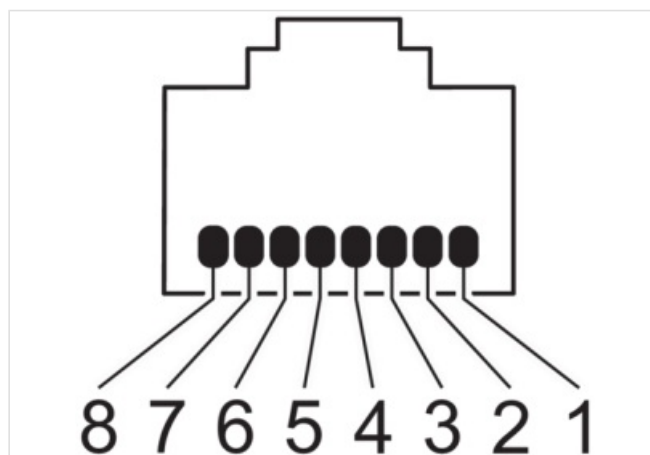
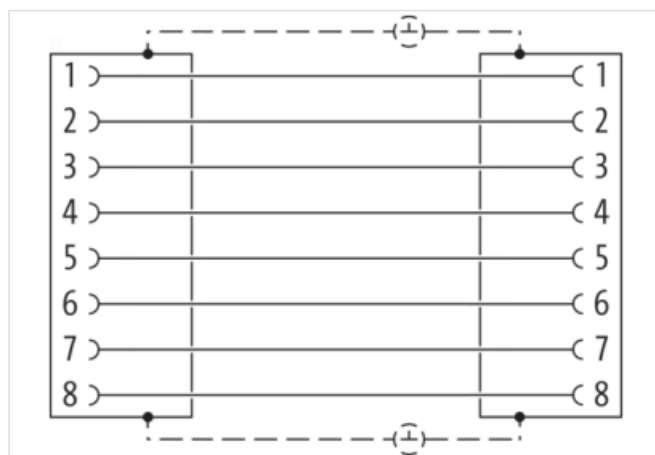
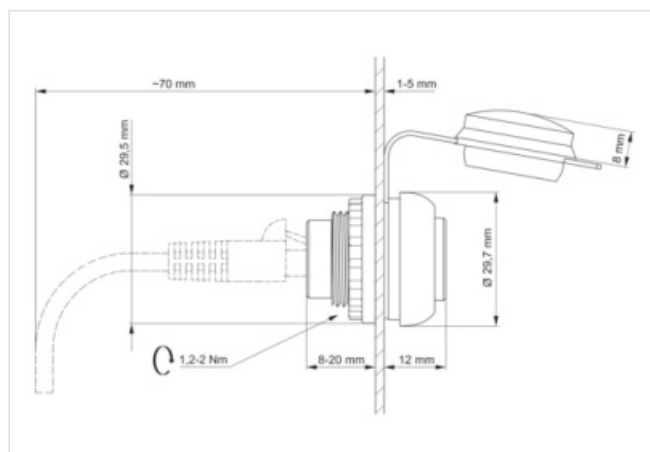
Weight: 0.018 kg

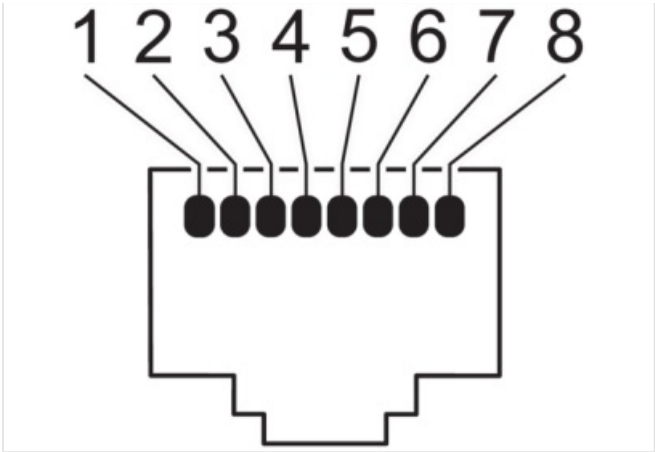
Country of origin: CZ

Model designation: MSDD PT22-S RJ45 CAT5e F/F

Pass-through

1 × RJ45, 8-pole CAT5e (female/female)

[Link to Product](#)**Illustration**



Product may differ from Image



Header	
Material short text	MSDD PT22-S RJ45 CAT5e F/F
Commercial data	
URL Webshop	<a href="https://shop.murrelektronik.com/4000-73000-0010000">https://shop.murrelektronik.com/4000-73000-0010000</a>
GTIN	4048879031189
ECLASS-6.0	27143423
ECLASS-6.1	27143419
ECLASS-7.0	27440515
ECLASS-7.1	27440515
ECLASS-8.0	27440515
ECLASS-8.1	27440515
ECLASS-9.0	27440515
ECLASS-9.1	27440515
ECLASS-10.0.1	27440515
ECLASS-10.1	27440515
ECLASS-11.0	27440515
ECLASS-11.1	27440515
ECLASS-12.0	27440515
ECLASS-13.0	27440515
ECLASS-14.0	27440515
ETIM-5.0	EC002625
ETIM-6.0	EC002625
ETIM-7.0	EC002625
ETIM-8.0	EC002625
customs tariff number	85366990
EAN	4048879031189
Packaging unit	1
Electrical data   Supply	
Operating voltage AC	24 V
Operating voltage DC	24 V
Operating current max.	1,5 A
Industrial Communication	

Data transmission rate max. 1.000 Mbit/s

**Installation | Connection**

Family construction form	RJ47
Gender	female
Gender Rear	female
Cable category min.	Cat5e

**Device protection**

Shielded	Yes
----------	-----

**Device protection | Electrical**

Degree of protection (EN IEC 60529)	IP20, IP65
Protection NEMA	12, 3R, 4x, 4, 13, 2
Additional condition protection degree	in closed state, inserted

**Device protection | Mechanical**

Mechanical endurance	750 cycles
----------------------	------------

**Mechanical data | Mounting data**

Depth	20 mm
Diameter	29,5 mm
Mounting depth	70 mm
Diameter cutout	22,5 mm

**Approvals**

UL 50E	Yes
--------	-----