

**MSDD pass-through RJ45 CAT5e femal/femal, design silver**

Art.No.: 4000-73000-0010000

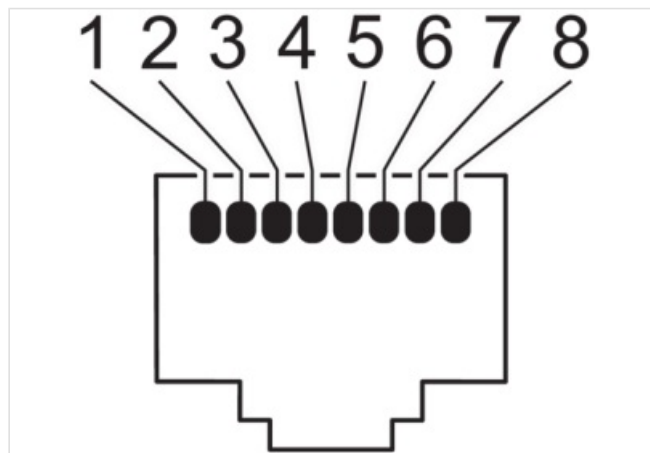
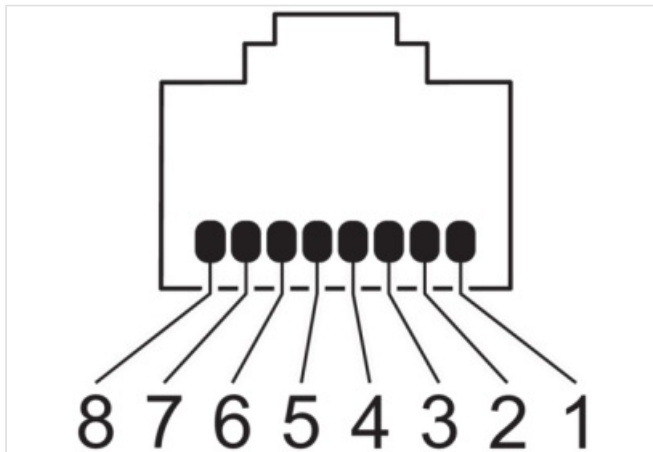
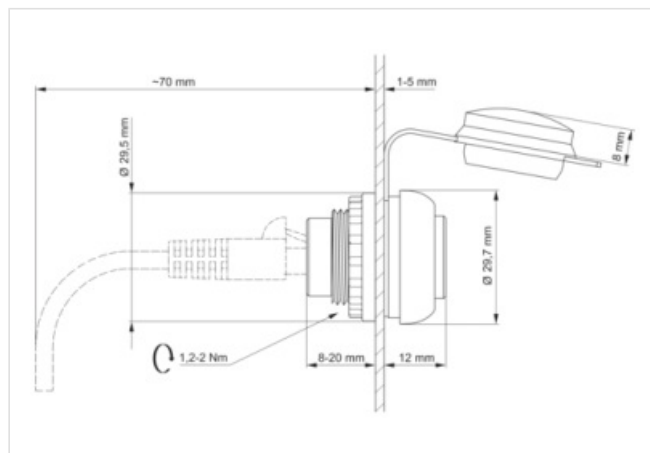
Weight: 0.018


Country of origin: CZ

Model designation: MSDD PT22-S RJ45 CAT5e F/F


Pass-through

1 × RJ45, 8-pole CAT5e (female/female)

[Link to Product](#)**Illustration**

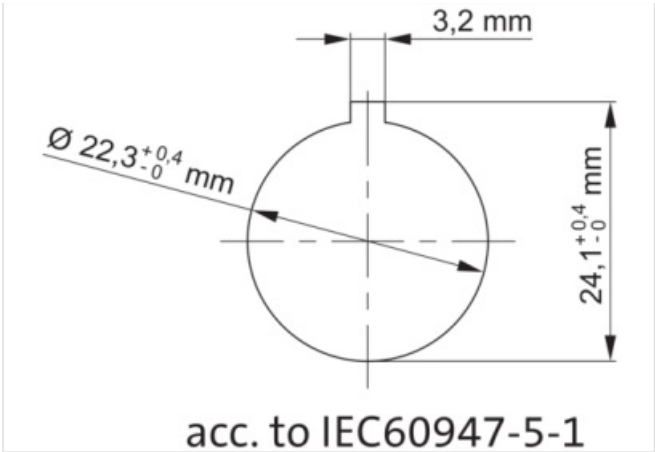

Product may differ from Image

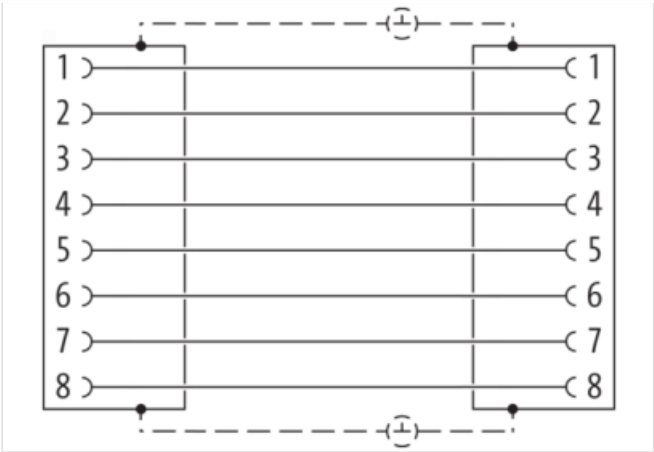

Header

Material short text MSDD PT22-S RJ45 CAT5e F/F

Commercial data

URL Webshop	<a href="https://shop.murrelektronik.com/4000-73000-0010000">https://shop.murrelektronik.com/4000-73000-0010000</a>
GTIN	4048879031189
ECLASS-6.0	27143423
ECLASS-6.1	27143419
ECLASS-7.0	27440515
ECLASS-7.1	27440515
ECLASS-8.0	27440515
ECLASS-8.1	27440515
ECLASS-9.0	27440515
ECLASS-9.1	27440515
ECLASS-10.0.1	27440515
ECLASS-10.1	27440515
ECLASS-11.0	27440515
ECLASS-11.1	27440515
ECLASS-12.0	27440515
ECLASS-13.0	27440515
ECLASS-14.0	27440515
ETIM-5.0	EC002625
ETIM-6.0	EC002625
ETIM-7.0	EC002625
ETIM-8.0	EC002625
customs tariff number	85366990
EAN	4048879031189
Packaging unit	1

Electrical data | Supply

Operating voltage AC	24 V
Operating voltage DC	24 V
Operating current max.	15 A

Industrial communication

Data transmission rate max. 1,000 MBit/s

**Installation | Connection**

Family construction form RJ47

Gender female

Gender Rear female

Cable category min. Cat5e

**Device protection**

Shielded yes

**Device protection | Electrical**

Degree of protection (EN IEC 60529) IP20, IP65

Protection NEMA 12, 3R, 4x, 4, 13, 2

Additional condition protection degree in closed state, inserted

**Device protection | Mechanical**

Mechanical endurance 750 Cycles

**Mechanical data | Mounting data**

Depth 20 mm

Diameter 295 mm

Mounting depth 70 mm

Diameter cutout 225 mm

**Approvals**

UL 50E yes