

MSDD pass-through USB 3.0 form A, 0.6 m cable, design silver

Art.No.: 4000-73000-0150000

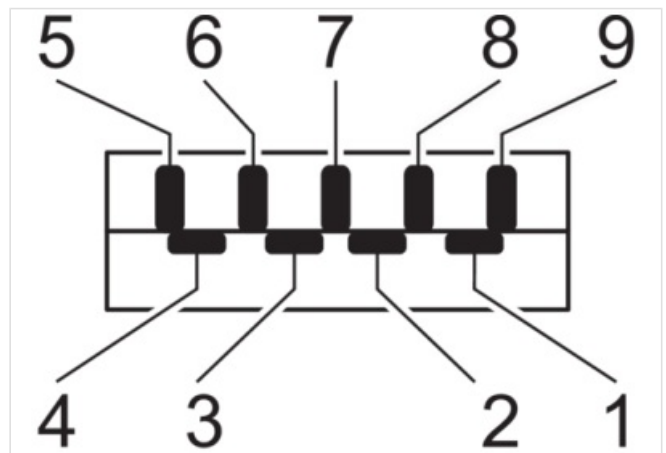
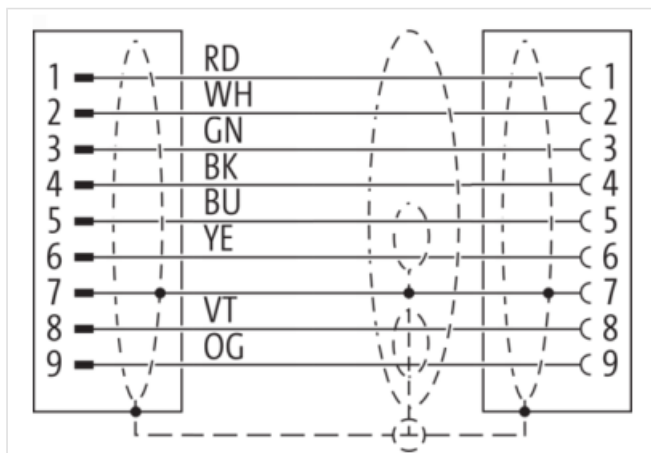
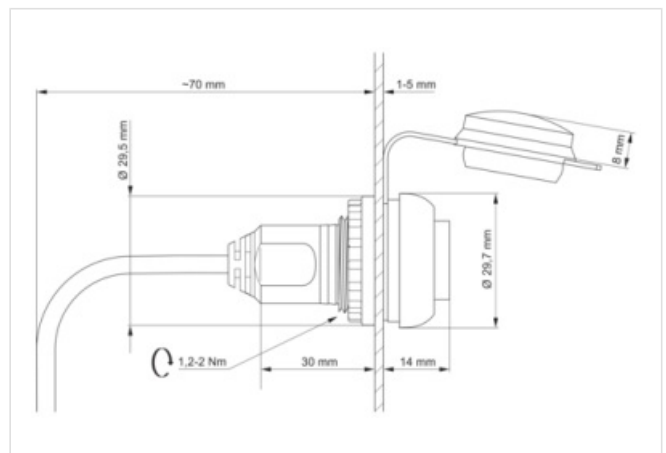
Weight: 0.059 kg

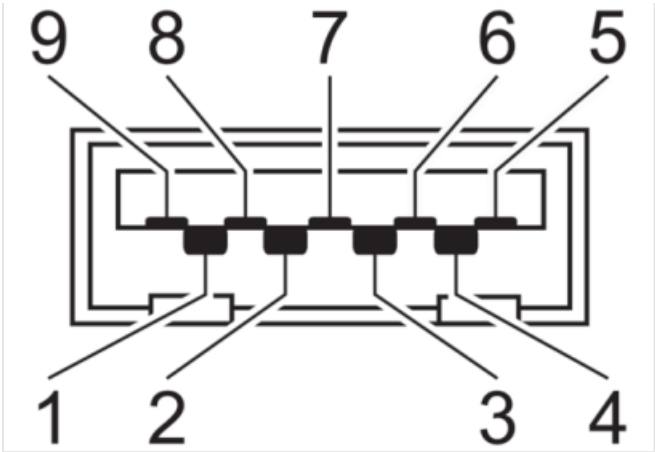
Country of origin: CZ

Model designation: MSDD PT22-S USB3.0 A/A F/M_0.6

Pass-through

1 × USB 3.0 (female/male/0.6 m cable) form A

[Link to Product](#)**Illustration**



Product may differ from Image



| Header | |
|--------------------------|---|
| Material short text | MSDD PT22-S USB3.0 A/A F/M_0.6 |
| Commercial data | |
| URL Webshop | https://shop.murrelektronik.com/4000-73000-0150000 |
| GTIN | 4048879432894 |
| ECLASS-6.0 | 27143423 |
| ECLASS-6.1 | 27143419 |
| ECLASS-7.0 | 27440515 |
| ECLASS-7.1 | 27440515 |
| ECLASS-8.0 | 27440515 |
| ECLASS-8.1 | 27440515 |
| ECLASS-9.0 | 27440515 |
| ECLASS-9.1 | 27440515 |
| ECLASS-10.0.1 | 27440515 |
| ECLASS-10.1 | 27440515 |
| ECLASS-11.0 | 27440515 |
| ECLASS-11.1 | 27440515 |
| ECLASS-12.0 | 27440515 |
| ECLASS-13.0 | 27440515 |
| ECLASS-14.0 | 27440515 |
| ETIM-5.0 | EC002625 |
| ETIM-6.0 | EC002625 |
| ETIM-7.0 | EC002625 |
| ETIM-8.0 | EC002625 |
| customs tariff number | 85444290 |
| EAN | 4048879432894 |
| Packaging unit | 1 |
| Electrical data Supply | |
| Operating voltage AC | 5 V |
| Operating voltage DC | 5 V |
| Operating current max. | 900 mA |
| Industrial Communication | |

| | |
|-----------------------------|--------------|
| Data transmission rate max. | 5.000 Mbit/s |
|-----------------------------|--------------|

| | |
|-------------------|-----|
| USB specification | 3.0 |
|-------------------|-----|

Device protection

| | |
|----------|-----|
| Shielded | Yes |
|----------|-----|

Device protection | Electrical

| | |
|-------------------------------------|------------|
| Degree of protection (EN IEC 60529) | IP20, IP65 |
|-------------------------------------|------------|

| | |
|-----------------|----------------------|
| Protection NEMA | 12, 3R, 4x, 4, 13, 2 |
|-----------------|----------------------|

| | |
|--|---------------------------|
| Additional condition protection degree | in closed state, inserted |
|--|---------------------------|

Device protection | Mechanical

| | |
|----------------------|--------------|
| Mechanical endurance | 1.500 cycles |
|----------------------|--------------|

Mechanical data | Mounting data

| | |
|-------|-------|
| Depth | 30 mm |
|-------|-------|

| | |
|----------|---------|
| Diameter | 29,5 mm |
|----------|---------|

| | |
|----------------|-------|
| Mounting depth | 70 mm |
|----------------|-------|

| | |
|-----------------|---------|
| Diameter cutout | 22,5 mm |
|-----------------|---------|

Approvals

| | |
|--------|-----|
| UL 50E | Yes |
|--------|-----|