

M8 female 0° A-cod. with cable

PUR 3x0.25 ye UL/CSA+drag ch. 5m

Art.No.: 7000-08041-0300500

Weight: 0.123 Country of origin: US

Model designation: MSFL0-R030_5.0

Advantages of our connectors:

Our connectors are versatile and specially optimised for industrial environments. All connectors are 100% tested during the manufacturing process to ensure the highest quality and reliability.

The contacts are gold-plated, which ensures optimum conductivity. Thanks to the high degree of protection, the connectors are ideal for demanding industrial environments. They are also vibration-resistant - this is ensured by the union nut with vibration protection.

Our connectors are resistant to oils and cooling lubricants, but resistance to aggressive media should be tested for each specific application. Different cable lengths available on request

If you are missing technical information? Please feel free to use our dictionary to find more technical details.

Product details: Female straight

M8, 3-pole

with cable sleeves

Art-No. 7005 - M8 Lite - (plastic hexagonal screw) on request


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request. Further cable lengths on request.

Link to Product


Illustration




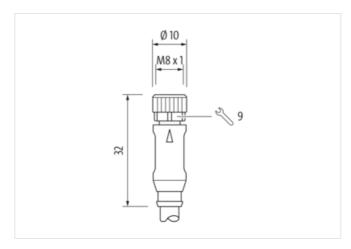






stay connected

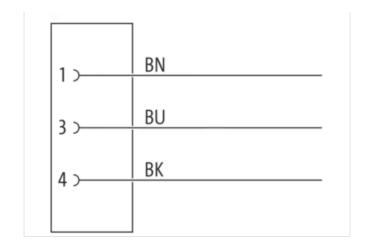

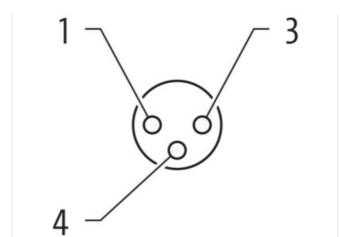

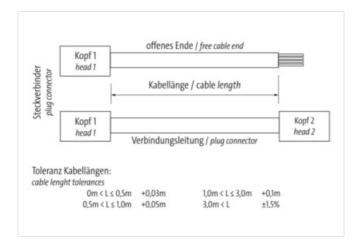

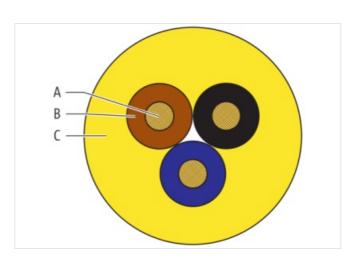

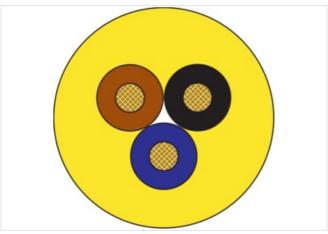

Product may differ from Image



0

0

0

0





Material short text MSFLO-R030_5.0 Cable length 5,00 m Side 1 Family construction form M8 No. of poles 3 Coding A Gender female Mounting method inserted. screwed Thread M8 x 1 Tightening torque 0.4 km Width across flats SW9 Cable outlet straight Suitable for corrugated tube (internal O) 6.5 mm Material contact Copper alloy Coating contact gold plated Degree of protection (EN IEC 60529) IP67, IP66K, IP65 Side 2 Commercial data URL Webshop https://shop.murelektronik.com/7000-08041-0300500 GTIN 4048878231640 ECLASS-6.0 27279218 ECLASS-7.0 27279218 ECLASS-8.1 27279218 ECLASS-8.3 27279218 ECLASS-9.0 27060311 ECLASS-10.1 27060311 ECLASS-11.0 27060311 <th>Header</th> <th></th>	Header	
Side 1 Family construction form M8 No. of poles 3 Coding A Gender female Mounting method inserted, screwed Thread M8 x 1 Tightening torque 0.4 Nm Width across flats SW9 Cable outlet straight suitable for corrugated tube (internal Ø) 5.5 mm Material PUR Material contact Copper alloy Ocating contact gold pated Degree of protection (EN IEC 60529) IP67, IP66K, IP65 Side 2 Family construction form free cable end Stipping length (jacket) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879321640 ECLASS-6.0 27279218 ECLASS-6.0 227279218 ECLASS-7.1 27279218 ECLASS-7.1 27279218 ECLASS-8.1 27279218 ECLASS-8.1 27279218 ECLASS-9.0 272760311 ECLASS-9.0	Material short text	MSFL0-R030_5.0
Family construction form M8 No. of poles 3 Coding A Gender female Mounting method inserted, screwed Thread M8 x 1 Tightening torque 0.4 Nm Width across flats SW9 Cable outlet straight suitable for corrugated tube (internal Ø) 6.5 mm Material PUR Material contact Copper alloy Coating contact gold plated Degree of protection (EN IEC 60529) IP67, IP66K, IP65 Side 2 Family construction form fee cable end Stripping length (soctet) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-7.0 22789218 ECLASS-7.0 22789218 ECLASS-8.1 27279218 ECLASS-8.0 2760311 <td>Cable length</td> <td>5,00 m</td>	Cable length	5,00 m
No. of poies 3 Coding A Gender female Mounting method inserted, screwed Thread M8 x 1 Tightening torque 0.4 Nm Width across flats SW9 Cable outlet straight suitable for corrugated tube (internal 0) 6.5 mm Material PUR Material onfact Copper alloy Coating contact gold plated Degree of protection (EN IEC 60529) IP67, IP66K, IP65 Side 2 Family construction form Stripping length (jacket) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-7.1 27279218 ECLASS-7.1 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-10.0 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	Side 1	
Coding A Gender female Mounting method inserted, screwed Thread M8 x 1 Tightening torque 0.4 Nm Width across flats SW9 Cable outlet straight suitable for corrugated tube (internal O) 6.5 mm Material PUR Material contact Copper alloy Ocating contact gold plated Degree of protection (EN IEC 60529) IP67, IP66K, IP65 Side 2 Family construction form free cable end Stripping length (jacket) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060311 ECLASS-9.0 27060311 ECLASS-10.0 27060311 ECLASS-11.1 27060311 <td>Family construction form</td> <td>M8</td>	Family construction form	M8
Gender female Mounting method inserted, screwed	No. of poles	3
Mounting method Inserted, screwed	Coding	A
Thread M8 x 1	Gender	female
Tightening torque 0.4 Nm Width across flats SW9 Cable outliet straight suitable for corrugated tube (internal O) 6.5 mm Material PUR Material contact Copper alloy Coating contact gold pated Degree of protection (EN IEC 60529) IP67, IP66K, IP65 Side 2 Family construction form Stripping length (jacket) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0 27060311 ECLASS-11.0 27060311 ECLASS-12.0 27060311	Mounting method	inserted, screwed
Width across flats SW9 Cable outlet straight suitable for corrugated tube (internal Ø) 6.5 mm Material PUR Material contact Copper alloy Coating contact gold plated Degree of protection (EN IEC 60529) IP67, IP66K, IP65 Side 2 Family construction form free cable end Stripping length (jacket) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0 27060311 ECLASS-11.0 27060311 ECLASS-12.0 27060311	Thread	M8 x 1
Cable outlet straight suitable for corrugated tube (internal 0) 6.5 mm Material PUR Material contact Copper alloy Coating contact gold plated Degree of protection (EN IEC 60529) IP67, IP66K, IP65 Side 2 Family construction form free cable end Stripping length (jacket) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	Tightening torque	0.4 Nm
suitable for corrugated tube (internal Ø) 6.5 mm Material PUR Material contact Copper alloy Coating contact gold plated Degree of protection (EN IEC 60529) IP67, IP66K, IP65 Side 2 Family construction form free cable end Stripping length (jacket) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060311 ECLASS-9.0.1 27060311 ECLASS-10.0 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311 ECLASS-12.0 27060311	Width across flats	SW9
Material PUR Material contact Copper alloy Coating contact gold plated Degree of protection (EN IEC 60529) IP67, IP66K, IP65 Side 2 Family construction form free cable end Stripping length (jacket) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 227379218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.2 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	Cable outlet	straight
Material contact Copper alloy Coating contact gold plated Degree of protection (EN IEC 60529) IP67, IP66K, IP65 Side 2 Family construction form free cable end Stripping length (jacket) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27660311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-11.2 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	suitable for corrugated tube (internal Ø)	6.5 mm
Coating contact gold plated Degree of protection (EN IEC 60529) IP67, IP66K, IP65 Side 2 Family construction form free cable end Stripping length (jacket) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-7.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	Material	PUR
Degree of protection (EN IEC 60529) IP67, IP66K, IP65 Side 2 Family construction form free cable end Stripping length (jacket) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	Material contact	Copper alloy
Side 2 Family construction form free cable end Stripping length (jacket) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311		
Family construction form free cable end Stripping length (jacket) 20 mm Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	Degree of protection (EN IEC 60529)	IP67, IP66K, IP65
Commercial data 20 mm URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-11.2 27060311	Side 2	
Commercial data URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-11.2 27060311	Family construction form	free cable end
URL Webshop https://shop.murrelektronik.com/7000-08041-0300500 GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	Stripping length (jacket)	20 mm
GTIN 4048879231640 ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-10.1 27060311 ECLASS-11.0 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	Commercial data	
ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-10.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	URL Webshop	https://shop.murrelektronik.com/7000-08041-0300500
ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-10.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	GTIN	4048879231640
ECLASS-7.0 27279218 ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-10.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	ECLASS-6.0	27279218
ECLASS-7.1 27279218 ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-10.1 27060311 ECLASS-11.0 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	ECLASS-6.1	27279218
ECLASS-8.0 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-10.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	ECLASS-7.0	27279218
ECLASS-8.1 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-10.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	ECLASS-7.1	27279218
ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-10.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	ECLASS-8.0	27279218
ECLASS-9.1 27060311 ECLASS-10.0.1 27060311 ECLASS-10.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	ECLASS-8.1	27279218
ECLASS-10.0.1 27060311 ECLASS-10.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	ECLASS-9.0	27060311
ECLASS-10.1 27060311 ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	ECLASS-9.1	27060311
ECLASS-11.0 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311	ECLASS-10.0.1	27060311
ECLASS-11.1 27060311 ECLASS-12.0 27060311	ECLASS-10.1	27060311
ECLASS-12.0 27060311	ECLASS-11.0	27060311
	ECLASS-11.1	27060311
ECLASS-13.0 27060311	ECLASS-12.0	27060311
	ECLASS-13.0	27060311

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-11-03



stay connected

ECLASS-14.0	27060311
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855
ETIM-8.0	EC001855
customs tariff number	85444290
EAN	4048879231640
Packaging unit	1
Electrical data Supply	
Operating voltage AC max.	50 V
Operating voltage DC max.	60 V
Current operating per contact max.	4 A
Diagnostics	
Status indication LED	no
Installation Connection	
Mounting set	M8 x 1
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	1.5 kV
Material group (IEC 60664-1)	
Mechanical data Material data	
Material screw connection	Zinc die-casting
Coating of fitting	nickel plated
Locking material	Zinc die-casting
Coating locking	Nickeled
Material gasket	FKM
Mechanical data Mounting data	
Mounting method	inserted, screwed, Shaking protection
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C
Additional condition temperature range	depending on cable quality
Important installation notes	
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Conformity	
Product standard	EN/IEC 61076-2-104 (M8)
Installation Cable	
Cable identification	030
Cable Type	3
Amount stranding	1
Stranding	3 wires stranded
Wire arrangement	brown, black, blue
Cable weigth	24 g/m
Material wire insulation	PP
Amount wires	3
Outer diameter insulation	1.25 mm
Outer diameter tolerance core insulation	± 0.05 mm
Shore hardness wire insulation	70 ± 5 Shore D

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-11-03



Ingredient freeness wire insulation	CFC-free, cadmium-free, silicone-free, halogen-free, lead-free
Amount strands (wire)	32
Diameter of single wires	0.1 mm
Conductor crosssection (wire)	0.25 mm ²
Material conductor wire	Stranded copper wire, bare
Conductor type (wire)	strand class 6
Outer-diameter (jacket)	4.1 mm
Tolerance outer diameter (sheath)	± 5 %
Material jacket	PUR
Shore hardness jacket	90 ± 5 Shore A
Freedom from ingredients (jacket)	CFC-free, cadmium-free, silicone-free, halogen-free, lead-free
Material property (jacket)	matte, good machinability, abrasion-resistant, low adhesion
Conductor resistance (wire)	79 Ω/km @ 20 °C
Nominal voltage AC max.	300 V
Withstand voltage (wire - wire)	2.5 kV @ 60 s
Withstand voltage (wire - jacket)	2.5 kV @ 60 s
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity min. wire	4.5 A
Min. operating temperature (static)	-40 °C
Max. operating temperature (fixed)	80 °C / 90 °C @ 10000 h Operation
Operating temperature min. (dynamic)	-25 °C
Operating temperature max. (dynamic)	80 °C / 90 °C @ 10000 h Operation
Operating temperature min. (drag chain)	-25 °C
Operating temperature max. (drag chain)	80 °C / 90 °C @ 10000 h Operation
Flame resistance	UL 1581 § 1090, CSA FT2, IEC 60332-2-2
Oil resistance	IEC 60811-404
Chemical resistance	good
Other resistances	good resistance to gasoline, resistant to hydrolysis, resistant to microbes
Bending radius (fixed)	5 × Outer diameter
Bending radius (dynamic)	10 × Outer diameter
No. of bending cycles (C-track)	10 Mio. @ 25 °C
Traversing distance (C-track)	10 m @ 25 °C horizontal
Travel speed (C-track)	3 m/s @ 25 °C
Acceleration (C-track)	10 m/s² @ 25 °C
No. of torsion cycles	2 Mio.
Torsion stress	± 180 °/m
Torsion speed	35 cycles/min