

**M8 male 0° A-cod. IDC**4-pol., 0,14 - 0,34mm<sup>2</sup>, 2,5 - 5,1mm

Art.No.: 7000-08351-0000000

Weight: 0.015 kg

Country of origin: DE

Model designation: MSHL0-AC-T MOSA 0,14-0,34qmm

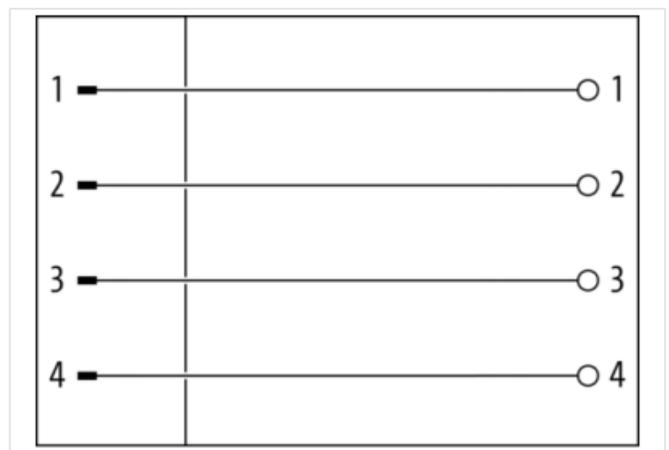
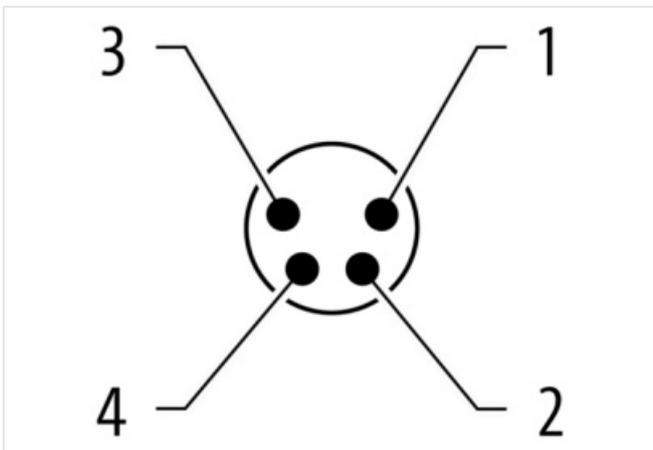
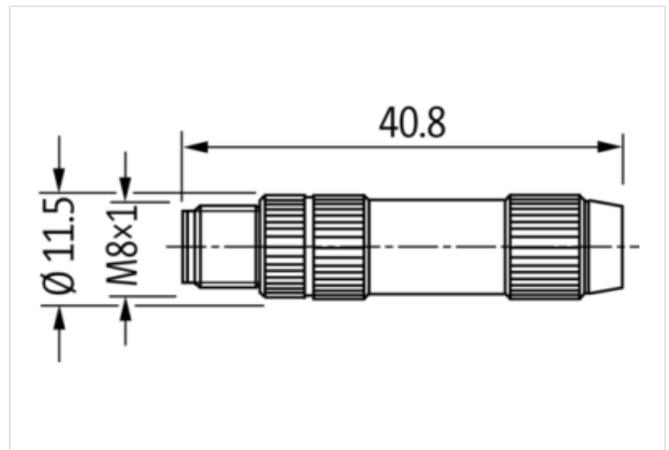
IDC terminals

Male straight

M8, 4-pole

Connection cross section: 0.14...0.34 mm<sup>2</sup>

Sealing comb included in delivery

[Link to Product](#)**Illustration**

Product may differ from Image

**Side 1**

Family construction form	M8
No. of poles	4

Gender	male
Mounting method	inserted, screwed
Width across flats	SW9
Cable outlet	straight
Material	PA
Material contact	Copper alloy
Degree of protection (EN IEC 60529)	IP67

**Side 2**

Mounting method	Field-wireable
-----------------	----------------

**Commercial data**

URL Webshop	<a href="https://shop.murrelektronik.com/7000-08351-0000000">https://shop.murrelektronik.com/7000-08351-0000000</a>
GTIN	4048879224710
ECLASS-6.0	27279221
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-7.1	27440102
ECLASS-8.0	27440102
ECLASS-8.1	27440102
ECLASS-9.0	27440116
ECLASS-9.1	27440106
ECLASS-10.0.1	27440106
ECLASS-10.1	27440102
ECLASS-11.0	27440106
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440106
ECLASS-14.0	27440106
ETIM-5.0	EC002635
ETIM-6.0	EC002635
ETIM-7.0	EC002635
ETIM-8.0	EC002635
customs tariff number	85366990
EAN	4048879224710
Packaging unit	1

**Electrical data | Supply**

Operating voltage AC max.	32 V
Operating voltage DC max.	32 V
Current operating per contact max.	4 A

**Installation**

Single wire diameter min.	0,1 mm
Connection cross section min.	0,14 mm <sup>2</sup>
Connection cross section max.	0,34 mm <sup>2</sup>

**Installation | Connection**

Connection	Cut clamps IDC
Tightening torque	0,4 Nm
Mounting set	M8 x 1
Mating cycles min.	100
Wire insulation diameter min.	1 mm
Wire insulation diameter max.	1,6 mm

**Installation | Pin assignment**

Configuration	fully used
---------------	------------

**Device protection | Electrical**

Additional condition protection degree	inserted, screwed
Pollution Degree	3
Overvoltage category (EN 60950-1)	III
Rated surge voltage	0,8 kV
Insulation resistance min.	100 mΩ
Material group (IEC 60664-1)	I

#### Mechanical data | Material data

Locking material	Zinc die-casting
Coating locking	Nickeled

#### Mechanical data | Mounting data

Height	40,8 mm
Width	11,5 mm
Depth	11,5 mm
Mounting method	inserted, screwed, Shaking protection
Clamping range min.	2,5 mm
Clamping range max.	5,1 mm

#### Environmental characteristics | Climatic

Operating temperature min.	-25 °C
Operating temperature max.	85 °C

#### Important installation notes

Note on bending radius	<b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

#### Conformity

Product standard	EN IEC 61076-2-114 (M8)
------------------	-------------------------