

## MSUD valve plug BI-11mm 180° with cable

PUR 3x0.75 bk UL/CSA+drag ch. 5m

Art.No.: 7000-11081-6360500

Weight: 0.288 Country of origin: CZ

Model designation: MSUDK-KB1Z-636 5.0

**MSUD** 

Form BI (11 mm)

24 V AC ±20% / DC ±25%

LED and suppression

PE opposite cable entry (180°)

Attention: Contact carrier turned to 180°!

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


## **Link to Product**

## Illustration



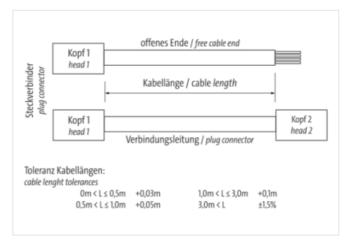


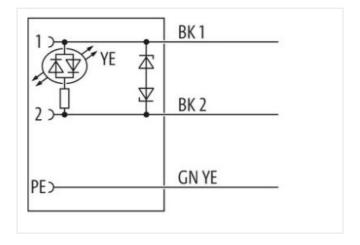

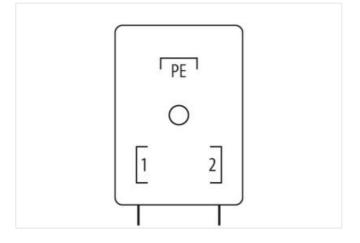



stay connected

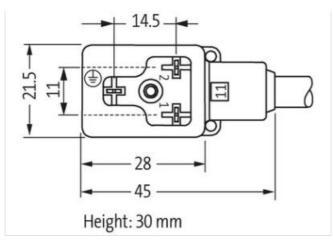

Product may differ from Image









Cable length	5 m
Side 1	
Tightening torque	0,4 Nm
Mounting method	inserted, screwed
Family construction form	MSUD BI
Thread	M3
Material	PBT
Degree of protection (EN IEC 60529)	IP67
Commercial data	
ECLASS-6.0	27279218
ECLASS-6.1	27279218
ECLASS-7.0	27279218
ECLASS-8.0	27279218
ECLASS-9.0	27060312
ECLASS-10.1	27060312
ECLASS-11.1	27060312
ECLASS-12.0	27060312
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855
ETIM-8.0	EC001855
customs tariff number	85444290
customs tariff number	85444290
EAN	4048879219952
EAN	4048879219952
Packaging unit	1
Packaging unit	1
Electrical data	
Drop-out delay time max.	20 ms
Electrical data   Supply	
Operating voltage AC	24 V



stay connected

Operating voltage AC min.	19,2 V
Operating voltage AC max.	28,8 V
Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Cut-off peak voltage max.	55 V
Current operating per contact max.	4 A
Current consumption max.	15 mA
Diagnostics	
Status indication LED	yellow
Installation   Connection	
Mounting set	M3
Device protection   Electrical	
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	0,8 kV
Material group (IEC 60664-1)	I
Additional suppressor	Diode, Z-Diode
Mechanical data   Material data	
Color housing	black
Coating locking	galvanized
Coating of fitting	galvanized
Material gasket	PUR
Locking material	Steel
Material screw connection	Steel
Mechanical data   Mounting data	
Mounting method	inserted, screwed
Mounting method  Environmental characteristics   Climatic	inserted, screwed
Environmental characteristics   Climatic	inserted, screwed
Environmental characteristics   Climatic Operating temperature min.	
Environmental characteristics   Climatic	-25 °C 85 °C
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range	-25 °C
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes	-25 °C 85 °C depending on cable quality
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range	-25 °C 85 °C depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes	-25 °C 85 °C depending on cable quality
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief Note on bending radius	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief Note on bending radius Installation   Cable	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief Note on bending radius Installation   Cable wire arrangement	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  black 1, black 2, green-yellow
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief Note on bending radius Installation   Cable wire arrangement Cable identification	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  black 1, black 2, green-yellow  636
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief Note on bending radius Installation   Cable wire arrangement Cable identification Cable Type	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  black 1, black 2, green-yellow  636  3
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief Note on bending radius Installation   Cable wire arrangement Cable identification Cable Type Printing color of wire insulation	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  black 1, black 2, green-yellow  636  3  white (isolation black)
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief Note on bending radius Installation   Cable wire arrangement Cable identification Cable Type Printing color of wire insulation Jacket Color	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  black 1, black 2, green-yellow  636  3  white (isolation black)  black
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief Note on bending radius Installation   Cable wire arrangement Cable identification Cable Type Printing color of wire insulation Jacket Color Type of Certificate	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  black 1, black 2, green-yellow  636  3  white (isolation black)  black  cURus
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief Note on bending radius Installation   Cable wire arrangement Cable identification Cable Type Printing color of wire insulation Jacket Color Type of Certificate Amount stranding	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  black 1, black 2, green-yellow  636  3  white (isolation black)  black  cURus  1
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief Note on bending radius Installation   Cable wire arrangement Cable identification Cable Type Printing color of wire insulation Jacket Color Type of Certificate Amount stranding Stranding	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  black 1, black 2, green-yellow  636  3  white (isolation black)  black  cURus  1  3 wires twisted
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief Note on bending radius Installation   Cable wire arrangement Cable identification Cable Type Printing color of wire insulation Jacket Color Type of Certificate Amount stranding Stranding wire arrangement	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  black 1, black 2, green-yellow  636  3  white (isolation black)  black  cURus  1  3 wires twisted  black 2, green-yellow
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief Note on bending radius Installation   Cable wire arrangement Cable identification Cable Type Printing color of wire insulation Jacket Color Type of Certificate Amount stranding Stranding wire arrangement Cable weigth	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  black 1, black 2, green-yellow 636 3 white (isolation black) black cURus 1 3 wires twisted black 1, black 2, green-yellow 56,1 g/m
Environmental characteristics   Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on strain relief Note on bending radius Installation   Cable wire arrangement Cable identification Cable Type Printing color of wire insulation Jacket Color Type of Certificate Amount stranding Stranding wire arrangement Cable weigth Material jacket	-25 °C  85 °C  depending on cable quality  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  black 1, black 2, green-yellow 636 3  white (isolation black) black cURus 1 3 wires twisted  black 1, black 2, green-yellow 56,1 g/m PUR



stay connected
----------------

Tolerance outer diameter (sheath)	± 5 %
Material wire insulation	PP
Amount wires	3
Outer diameter insulation	1,85 mm
Outer diameter tolerance core insulation	±5%
Shore hardness wire insulation	70 ± 5 Shore D
Ingredient freeness wire insulation	lead-free, cadmium-free, CFC-free, halogen-free, silicone-free
Printing color of wire insulation	white (isolation black)
Amount strands (wire)	42
Diameter of single wires	0,15 mm
Conductor crosssection (wire)	0,75 mm²
Material conductor wire	Stranded copper wire, bare
Conductor type (wire)	strand class 6
Nominal voltage AC max.	300 V
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity min. wire	12 A
Electrical resistance line constant wire	26 Ω/km @ 20 °C
AC withstand voltage (wire - wire)	2,5 kV @ 60 s
Power frequency withstand voltage (wire - jacket)	2,5 kV @ 60 s
Min. operating temperature (static)	-40 °C
Max. operating temperature (fixed)	80 °C / 90 °C @ 10000 h Operation
Operating temperature min. (dynamic)	-25 °C
Operating temperature max. (dynamic)	80 °C / 90 °C @ 10000 h Operation
UV resistance	DIN EN ISO 4892-2 A
Flame resistance	IEC 60332-2-2   UL 1581 § 1100 FT2   UL 1581 § 1090
chemical resistance	Good, application-related testing
Gasoline resistance	Good, application-related testing
Oil resistance	Good, application-related testing   DIN EN 60811-404
Bending radius (fixed)	5 x Outer diameter
Bending radius (dynamic)	10 x Outer diameter
No. of bending cycles (C-track)	10 Mio. @ 25 °C
Traversing distance (C-track)	10 m @ 25 °C   horizontal
Travel speed (C-track)	3 m/s @ 25 °C
No. of torsion cycles	2 Mio.
Torsion stress	± 180 °/m
Torsion speed	35 cycles/min