

M12 male recept. A-cod. rear

PUR-wires 4x0.34 0.5m

Art.No.: 7000-13505-9710050

Weight: 0.041 kg

Country of origin: DE


Model designation: MSAFH-T971_0.5

Flange male


M12, 4-pole


Rear mounting

with multi-strand wire

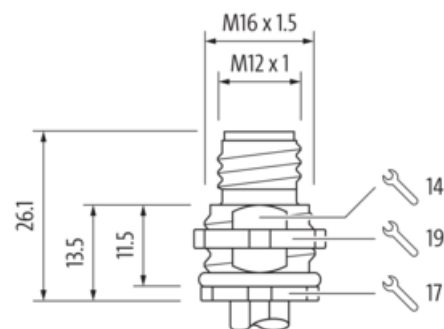[Link to Product](#)**Illustration**

1	BN
2	WH
3	BU
4	BK

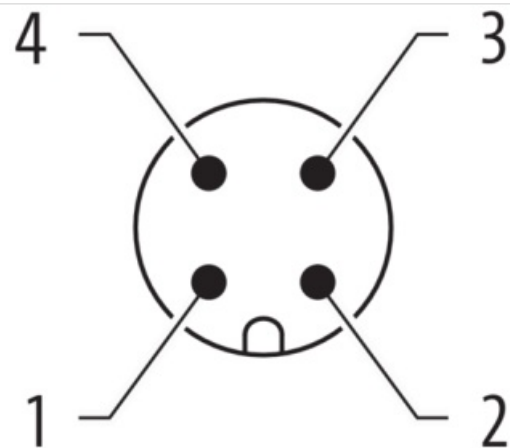

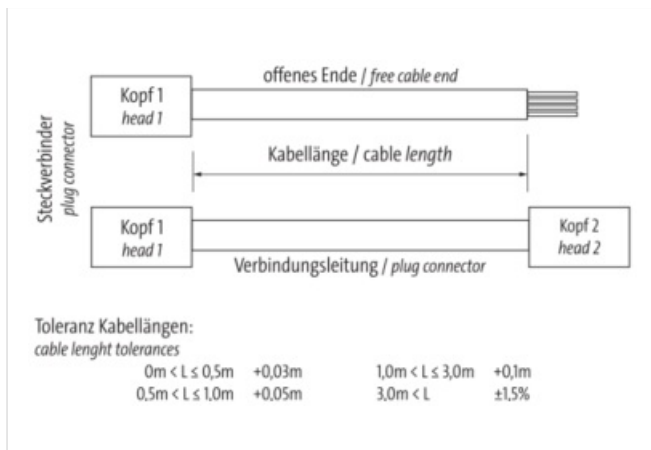

Product may differ from Image

**Header**

Cable length 0,50 m

Side 1

Family construction form	M12
No. of poles	4
Coding	A
Mounting method	inserted, screwed
Threaded hole	M12 x 1
Tightening torque	0,6 Nm
Material	Brass
Material contact	Copper alloy
Coating contact	gold plated
Degree of protection (EN IEC 60529)	IP67

Commercial data

URL Webshop	https://shop.murrelektronik.com/7000-13505-9710050
customs tariff number	85444290
EAN	4048879330862
Packaging unit	1

Electrical data | Supply

Operating voltage AC max.	250 V
Operating voltage DC max.	250 V
Current operating per contact max.	4 A

Diagnostics

Status indication LED	No
-----------------------	----

Installation | Connection

Mounting set	M16 x 1,5
Width across flats	SW19

Device protection | Electrical

Protection NEMA	6P, 4, 3
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	2,5 kV

Material group (IEC 60664-1)

I

Mechanical data

Contour for corrugated hose without

Mechanical data | Material data

Coating housing nickel plated

Material screw connection Brass

Coating of fitting nickel plated

Locking material Brass

Coating locking nickel plated

Material gasket FKM

Mechanical data | Mounting data

Mounting method Schraubgewinde

Looking techniques Schraubgewinde

Environmental characteristics | Climatic

Operating temperature min. -30 °C

Operating temperature max. 85 °C

Additional condition temperature range depending on cable quality

Important installation notes

Note on bending radius **Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.

Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

Conformity

Product standard EN IEC 61076-2-101 (M12)

Approvals

UL 50E Yes

Installation | Cable

Cable identification 971

Cable weight 33 g/m

Material wire insulation PUR

Amount wires 4

Outer diameter insulation 1,3 mm

Conductor crosssection (wire) 0,34 mm²

Operating temperature min. (static) -40 °C

Operating temperature max. (static) 90 °C

Operating temperature min. (dynamic) -25 °C

Operating temperature max. (dynamic) 90 °C

Bending radius (fixed) 5 × Outer diameter