

## MSUD valve plug A-18mm with cable

PUR 3x0.75 bk UL/CSA+drag ch. 5m

Art.No.: 7000-18001-6360500

Weight: 0.282 Country of origin: CZ

Model designation: MSUDK-AB1L-636 5.0

Form A (18 mm) 24 V AC/DC ±25%

LED

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


## **Link to Product**

## Illustration



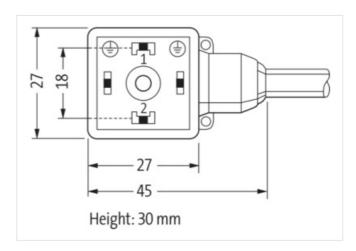


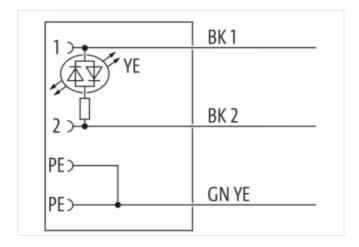

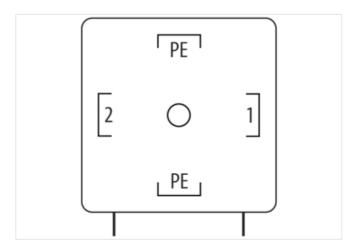



stay connected

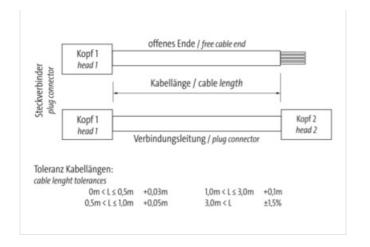





Product may differ from Image











Header	
Cable length	5,00 m
Side 1	
Family construction form	Valve connector form A
Mounting method	inserted, screwed
Threaded hole	M3x31
Tightening torque	0,4 Nm
Material	PBT
Degree of protection (EN IEC 60529)	IP67
Commercial data	
Commercial data URL Webshop	https://shop.murrelektronik.com/7000-18001-6360500
	https://shop.murrelektronik.com/7000-18001-6360500 85444290
URL Webshop	<u>`</u>
URL Webshop customs tariff number	85444290
URL Webshop customs tariff number EAN	85444290
URL Webshop customs tariff number EAN Packaging unit	85444290
URL Webshop customs tariff number  EAN Packaging unit  Electrical data   Supply	85444290 4048879194648 1

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-12-02



stay connected

Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Current operating per contact max.	4 A
Diagnostics	
Status indication LED	yellow
Installation   Connection	
Mounting set	M3x31
Device protection   Electrical	
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	0,8 kV
Material group (IEC 60664-1)	
Mechanical data   Material data	
Color housing	black
Material screw connection	Steel
Coating of fitting	galvanized
Locking material	Steel
Coating locking	galvanized
Mechanical data   Mounting data	
Mounting method	inserted, screwed
	iliseiteu, soleweu
Environmental characteristics   Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C
Additional condition temperature range	depending on cable quality
Additional condition temperature range  Important installation notes	depending on cable quality
	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Important installation notes	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be
Important installation notes  Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Important installation notes  Note on bending radius  Note on strain relief	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636 3 1
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636  3 1 3 wires stranded
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636 3 1 3 wires stranded 51 g/m
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636  3  1  3 wires stranded  51 g/m  PP
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636  3  1  3 wires stranded  51 g/m  PP  3  1,85 mm  ± 0,1 mm
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636 3 1 3 wires stranded 51 g/m PP 3 1,85 mm
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636  3  1  3 wires stranded  51 g/m  PP  3  1,85 mm  ± 0,1 mm  70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636  3  1  3 wires stranded  51 g/m  PP  3  1,85 mm  ± 0,1 mm  70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black)
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation  Amount strands (wire)	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636  3  1  3 wires stranded  51 g/m  PP  3  1,85 mm  ± 0,1 mm  70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black)
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation  Amount strands (wire)  Diameter of single wires	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636  3  1  3 wires stranded  51 g/m  PP  3  1,85 mm  ± 0,1 mm  70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free  white (isolation black)  42  0,15 mm
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation  Amount strands (wire)  Diameter of single wires  Conductor crosssection (wire)	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636  3  1  3 wires stranded  51 g/m  PP  3  1,85 mm  ± 0,1 mm  70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black)  42  0,15 mm  0,75 mm²
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation  Amount strands (wire)  Diameter of single wires  Conductor crosssection (wire)  Material conductor wire	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black) 42 0,15 mm 0,75 mm² Stranded copper wire, bare
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation  Amount strands (wire)  Diameter of single wires  Conductor crosssection (wire)  Material conductor wire  Conductor type (wire)	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black) 42 0,15 mm 0,75 mm² Stranded copper wire, bare strand class 6
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation  Amount strands (wire)  Diameter of single wires  Conductor crosssection (wire)  Material conductor wire  Conductor type (wire)  Outer-diameter (jacket)	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636  3  1  3 wires stranded  51 g/m  PP  3  1,85 mm  ± 0,1 mm  70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black)  42  0,15 mm  0,75 mm²  Stranded copper wire, bare strand class 6  5,9 mm
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation  Amount strands (wire)  Diameter of single wires  Conductor crosssection (wire)  Material conductor wire  Conductor type (wire)  Outer-diameter (jacket)  Tolerance outer diameter (sheath)	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636  3  1  3 wires stranded  51 g/m  PP  3  1,85 mm  ± 0,1 mm  70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black)  42  0,15 mm  0,75 mm²  Stranded copper wire, bare strand class 6  5,9 mm ± 5 %
Important installation notes  Note on bending radius  Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation  Amount strands (wire)  Diameter of single wires  Conductor crosssection (wire)  Material conductor wire  Conductor type (wire)  Outer-diameter (jacket)	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  636  3  1  3 wires stranded  51 g/m  PP  3  1,85 mm  ± 0,1 mm  70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black)  42  0,15 mm  0,75 mm²  Stranded copper wire, bare strand class 6  5,9 mm



Freedom from ingredients (jacket)	CFC-free, cadmium-free, silicone-free, halogen-free, lead-free
Material property (jacket)	matte, good machinability, abrasion-resistant, low adhesion
Conductor resistance (wire)	26 Ω/km @ 20 °C
Nominal voltage AC max.	300 V
Withstand voltage (wire - wire)	2.5 kV @ 60 s
Withstand voltage (wire - jacket)	2.5 kV @ 60 s
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity min. wire	12 A
Min. operating temperature (static)	-40 °C
Max. operating temperature (static)	80 °C / 90 °C @ 10000 h Operation
Operating temperature min. (dynamic)	-25 °C
Operating temperature max. (dynamic)	80 °C / 90 °C @ 10000 h Operation
Operating temperature min. (drag chain)	-25 °C
Operating temperature max. (drag chain)	80 °C / 90 °C @ 10000 h Operation
Flame resistance	UL 1581 § 1090, CSA FT2, IEC 60332-2-2
Oil resistance	IEC 60811-404
Chemical resistance	good
Other resistances	good resistance to gasoline, resistant to hydrolysis, resistant to microbes
Bending radius (fixed)	5 × Outer diameter
Bending radius (dynamic)	10 × Outer diameter
No. of bending cycles (C-track)	10 Mio. @ 25 °C
Traversing distance (C-track)	10 m @ 25 °C   horizontal
Travel speed (C-track)	3 m/s @ 25 °C
Acceleration (C-track)	10 m/s² @ 25 °C
No. of torsion cycles	2 Mio.
Torsion stress	± 180 °/m
Torsion speed	35 cycles/min