

## MSUD valve plug A-18mm with cable

PUR 3x0.75 gy UL/CSA+drag ch. 5m

Art.No.: 7000-18041-2360500

Weight: 0.292 Country of origin: CZ

Model designation: MSUDK-AB3Z-236 5.0

**MSUD** 

Form A (18 mm) 110 V AC/DC ±10% LED and suppression

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


## **Link to Product**

## Illustration



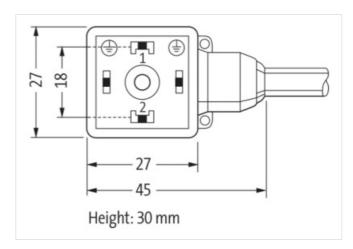


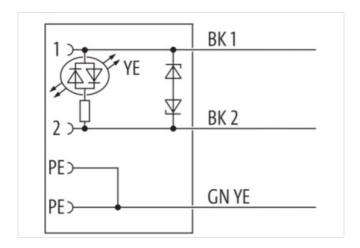

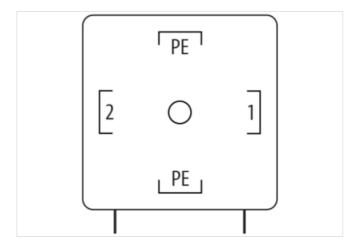




stay connected

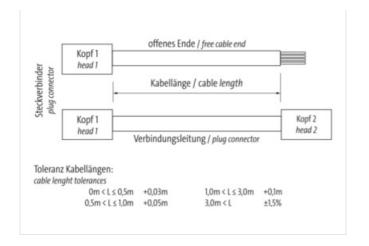



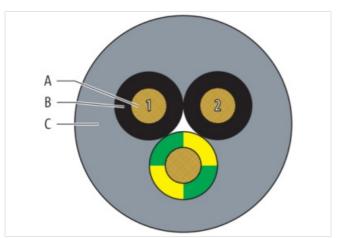

Product may differ from Image















stay connected

Operating voltage AC	110 V
Operating voltage AC min.	99 V
Operating voltage AC max.	121 V
Operating voltage DC	110 V
Operating voltage DC min.	99 V
Operating voltage DC max.	121 V
Current operating per contact max.	4 A
Cut-off peak voltage max.	250 V
Installation   Connection	
Mounting set	M3x31
Device protection   Electrical	
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Mechanical data   Material data	
Material housing	Plastic
Color housing	Black
Material screw connection	Steel
Coating of fitting	galvanized
	941-411-20
Mechanical data   Mounting data	
Mounting method	inserted, screwed
Environmental characteristics   Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C
Additional condition temperature range	depending on cable quality
Important installation notes	
Note on bending radius	<b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on bending radius  Note on strain relief	
	endangered by excessive bending forces.
Note on strain relief  Installation   Cable	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on strain relief  Installation   Cable  Cable identification	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236
Note on strain relief  Installation   Cable  Cable identification  Cable Type	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black)
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation  Amount strands (wire)	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black) 42
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation  Amount strands (wire)  Diameter of single wires	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black) 42 0,15 mm
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation  Amount strands (wire)  Diameter of single wires  Conductor crosssection (wire)	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black) 42 0,15 mm 0,75 mm²
Installation   Cable Cable identification Cable Type Amount stranding Stranding Cable weigth Material wire insulation Amount wires Outer diameter insulation Outer diameter tolerance core insulation Shore hardness wire insulation Ingredient freeness wire insulation Printing color of wire insulation Amount strands (wire) Diameter of single wires Conductor crosssection (wire) Material conductor wire	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black) 42 0,15 mm 0,75 mm² Stranded copper wire, bare
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation  Amount strands (wire)  Diameter of single wires  Conductor crosssection (wire)  Material conductor wire  Conductor type (wire)	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black) 42 0,15 mm 0,75 mm² Stranded copper wire, bare strand class 6
Note on strain relief  Installation   Cable Cable identification Cable Type Amount stranding Stranding Cable weigth Material wire insulation Amount wires Outer diameter insulation Outer diameter tolerance core insulation Shore hardness wire insulation Ingredient freeness wire insulation Printing color of wire insulation Amount strands (wire) Diameter of single wires Conductor crosssection (wire) Material conductor wire Conductor type (wire) Outer-diameter (jacket)	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236  3  1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black) 42 0,15 mm 0,75 mm² Stranded copper wire, bare strand class 6 5,9 mm
Note on strain relief  Installation   Cable  Cable identification  Cable Type  Amount stranding  Stranding  Cable weigth  Material wire insulation  Amount wires  Outer diameter insulation  Outer diameter tolerance core insulation  Shore hardness wire insulation  Ingredient freeness wire insulation  Printing color of wire insulation  Amount strands (wire)  Diameter of single wires  Conductor crosssection (wire)  Material conductor wire  Conductor type (wire)  Outer-diameter (jacket)  Tolerance outer diameter (sheath)	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black) 42 0,15 mm 0,75 mm² Stranded copper wire, bare strand class 6 5,9 mm ± 5 %
Installation   Cable Cable identification Cable Type Amount stranding Stranding Cable weigth Material wire insulation Amount wires Outer diameter insulation Outer diameter tolerance core insulation Shore hardness wire insulation Ingredient freeness wire insulation Printing color of wire insulation Printing color of wire insulation Diameter of single wires Conductor crosssection (wire) Material conductor wire Conductor type (wire) Outer-diameter (jacket) Tolerance outer diameter (sheath) Material jacket	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black) 42 0,15 mm 0,75 mm² Stranded copper wire, bare strand class 6 5,9 mm ± 5 % PUR
Installation   Cable Cable identification Cable Type Amount stranding Stranding Cable weigth Material wire insulation Amount wires Outer diameter insulation Outer diameter tolerance core insulation Shore hardness wire insulation Ingredient freeness wire insulation Printing color of wire insulation Amount strands (wire) Diameter of single wires Conductor crosssection (wire) Material conductor wire Conductor type (wire) Outer-diameter (jacket) Tolerance outer diameter (sheath) Material jacket Shore hardness jacket	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D  CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black)  42 0,15 mm 0,75 mm² Stranded copper wire, bare strand class 6 5,9 mm ± 5 % PUR 90 ± 5 Shore A
Installation   Cable Cable identification Cable Type Amount stranding Stranding Cable weigth Material wire insulation Amount wires Outer diameter insulation Outer diameter tolerance core insulation Shore hardness wire insulation Ingredient freeness wire insulation Printing color of wire insulation Printing color of wire insulation Diameter of single wires Conductor crosssection (wire) Material conductor wire Conductor type (wire) Outer-diameter (jacket) Tolerance outer diameter (sheath) Material jacket	endangered by excessive bending forces.  Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.  236 3 1 3 wires stranded 51 g/m PP 3 1,85 mm ± 0,1 mm 70 ± 5 Shore D CFC-free, cadmium-free, silicone-free, halogen-free, lead-free white (isolation black) 42 0,15 mm 0,75 mm² Stranded copper wire, bare strand class 6 5,9 mm ± 5 % PUR

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-11-30



stay connected

Conductor resistance (wire)	26 Ω/km @ 20 °C
Nominal voltage AC max.	300 V
Withstand voltage (wire - wire)	2.5 kV @ 60 s
Withstand voltage (wire - jacket)	2.5 kV @ 60 s
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity min. wire	12 A
Min. operating temperature (static)	-40 °C
Max. operating temperature (static)	80 °C / 90 °C @ 10000 h Operation
Operating temperature min. (dynamic)	-25 °C
Operating temperature max. (dynamic)	80 °C / 90 °C @ 10000 h Operation
Operating temperature min. (drag chain)	-25 °C
Operating temperature max. (drag chain)	80 °C / 90 °C @ 10000 h Operation
Flame resistance	UL 1581 § 1090, CSA FT2, IEC 60332-2-2
Oil resistance	IEC 60811-404
Chemical resistance	good
Other resistances	good resistance to gasoline, resistant to hydrolysis, resistant to microbes
Bending radius (fixed)	5 × Outer diameter
Bending radius (dynamic)	10 × Outer diameter
No. of bending cycles (C-track)	10 Mio. @ 25 °C
Traversing distance (C-track)	10 m @ 25 °C   horizontal
Travel speed (C-track)	3 m/s @ 25 °C
Acceleration (C-track)	10 m/s² @ 25 °C
No. of torsion cycles	2 Mio.
Torsion stress	± 180 °/m
Torsion speed	35 cycles/min