

M12 male 0° A-cod. / MSUD valve plug CI-9.4mm

PVC 3x0.75 ye 0.3m

Art.No.: 7000-41041-0160030

Weight: 0.044 Country of origin: CZ

Model designation: MSRL3-A-W016 0.3

MSUD

Form CI (9.4 mm) - M12, male straight

24 V AC $\pm 20\%$ / DC $\pm 25\%$

LED and suppression

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration






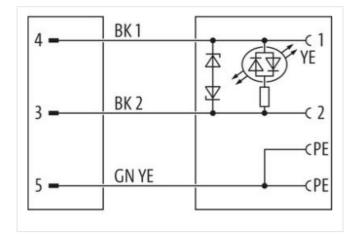


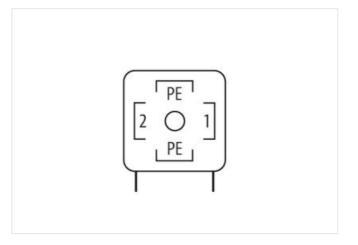




stay connected

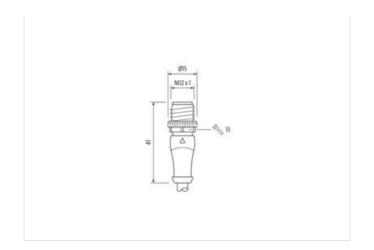



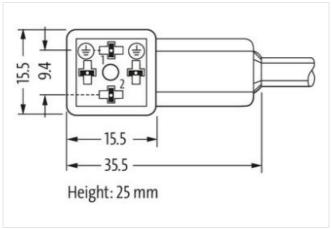

Product may differ from Image



Cable length	0,3 m
Side 1	
Tightening torque	0,4 Nm
Family construction form	MSUD CI
Thread	M3
No. of poles	4
Degree of protection (EN IEC 60529)	IP67
Side 2	
Tightening torque	0,6 Nm
Family construction form	M12
Thread	M12 x 1
suitable for corrugated tube (internal Ø)	10 mm
Coding	A
No. of poles	3
Width across flats	SW13
Degree of protection (EN IEC 60529)	IP67
Commercial data	
ECLASS-6.0	27279218

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-11-03



ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060312 ECLASS-10.1 27060312 ECLASS-11.1 27060312 ECLASS-12.0 27060312 ETIM-5.0 EC001855 85444290 customs tariff number customs tariff number 85444290 EAN 4048879147194 EAN 4048879147194 Packaging unit 1 Packaging unit 1 Electrical data 20 ms Drop-out delay time max. Electrical data | Supply Operating voltage AC 24 V Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC min. 18 V Operating voltage DC max. 30 V Cut-off peak voltage max. 55 V Current operating per contact max. 4 A **Diagnostics** Status indication LED yellow Device protection | Electrical Additional condition protection degree inserted, screwed Pollution Degree 3 0,8 kV Rated surge voltage Mechanical data | Material data Material housing Plastic Color housing black Mechanical data | Mounting data Mounting method inserted, screwed Environmental characteristics | Climatic Operating temperature min. -25 °C Operating temperature max. 85 °C Additional condition temperature range depending on cable quality Important installation notes Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be Note on bending radius endangered by excessive bending forces. Conformity DIN EN 61076-2-101 (M12); DIN EN 175301-803 (Ventilstecker) Product standard Installation | Cable wire arrangement black 1, black 2, green-yellow Cable identification 016 Cable Type

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-11-03



Printing color of wire insulation	white (isolation black)
Jacket Color	yellow
Amount stranding	1
Stranding	3 wires twisted
wire arrangement	black 1, black 2, green-yellow
Cable weigth	63,8 g/m
Material jacket	PVC
Shore hardness jacket	80 ± 5 Shore A
Freedom from ingredients (jacket)	lead-free, cadmium-free, CFC-free, silicone-free
Outer-diameter (jacket)	5,9 mm
Tolerance outer diameter (sheath)	±5%
Material wire insulation	PVC
Amount wires	3
Outer diameter insulation	1,8 mm
Outer diameter tolerance core insulation	±5%
Shore hardness wire insulation	43 ± 5 Shore D
Material properties wire insulation	good machinability
Ingredient freeness wire insulation	lead-free, cadmium-free, CFC-free, silicone-free
Printing color of wire insulation	white (isolation black)
Amount strands (wire)	24
Diameter of single wires	0,2 mm
Conductor crosssection (wire)	0,75 mm ²
Material conductor wire	Stranded copper wire, bare
Conductor type (wire)	Strand class 5
Max. rated voltage (conductor - conductor)	500 V
Max. rated voltage (conductor - ground)	300 V
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity min. wire	12 A
Electrical resistance line constant wire	26 Ω/km @ 20 °C
AC withstand voltage (wire - wire)	3 kV @ 60 s
Power frequency withstand voltage (wire - jacket)	3 kV @ 60 s
Min. operating temperature (static)	-30 °C
Max. operating temperature (fixed)	70 °C
Operating temperature min. (dynamic)	-5 °C
Operating temperature max. (dynamic)	70 °C
Flame resistance	IEC 60332-2-2 UL 1581 § 1100 FT2 UL 1581 § 1090
chemical resistance	Good, application-related testing
Gasoline resistance	Good, application-related testing
Oil resistance	Good, application-related testing DIN EN 60811-404
Bending radius (fixed)	5 x Outer diameter
Bending radius (dynamic)	10 x Outer diameter