



Adaptor M12 female 0° X-cod. / RJ45 90°

8-pol., shielded, CAT6A
Art.No.: 7000-51541-0000000
Weight: 0.048
Country of origin: RO
Model designation: Adapter M12 X-Cod. auf RJ45 gewinkelt


Adapter
M12 – RJ45, top connection
Female straight – female 90°
8-pole
X-coded
Gigabit
Ethernet CAT6A
shielded
Cap nut

Link to Product

Illustration

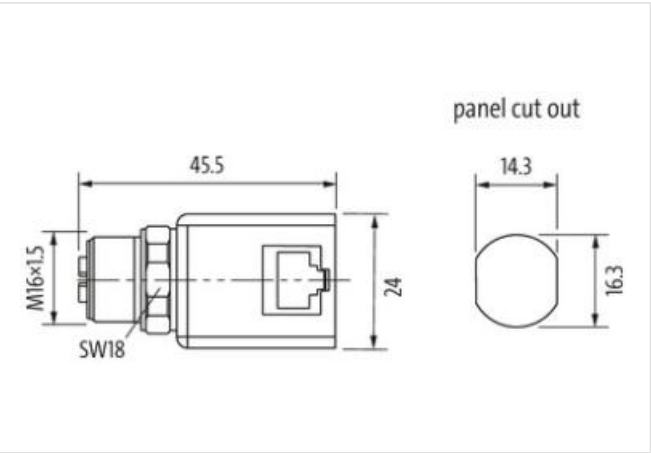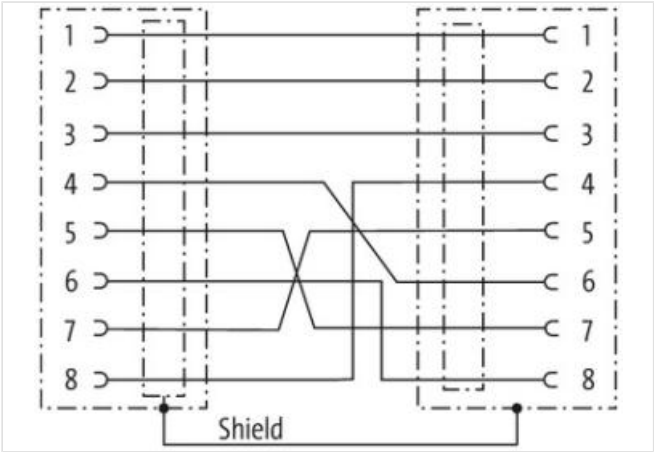

Product may differ from Image

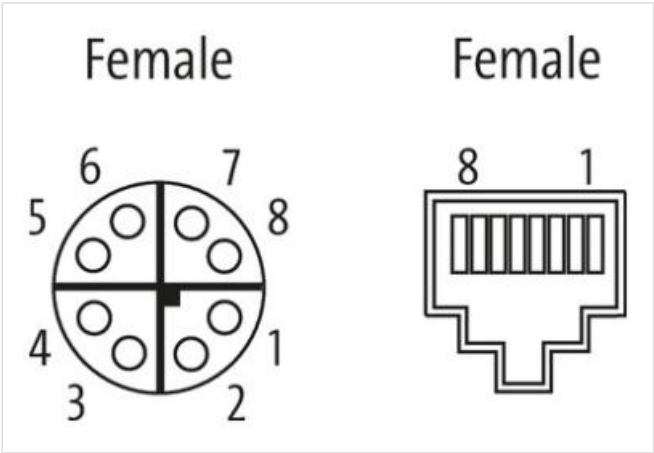

| Side 1 | |
|--------------------------|-------------------|
| Mounting method | inserted, screwed |
| Family construction form | M12 |
| Thread | M16 x 1.5 |

| | |
|-------------------------------------|---|
| Coding | X |
| No. of poles | 8 |
| Width across flats | SW18 |
| Side 2 | |
| Mounting method | inserted |
| Family construction form | RJ45 |
| No. of poles | 8 |
| Commercial data | |
| ECLASS-6.0 | 27143423 |
| ECLASS-6.1 | 27279221 |
| ECLASS-7.0 | 27440104 |
| ECLASS-8.0 | 27440104 |
| ECLASS-9.0 | 27440106 |
| ECLASS-10.1 | 27440106 |
| ECLASS-11.1 | 27440106 |
| ECLASS-12.0 | 27440106 |
| ETIM-5.0 | EC002640 |
| customs tariff number | 85366990 |
| customs tariff number | 85366990 |
| GTIN | 4048879699419 |
| GTIN | 4048879699419 |
| Packaging unit | 1 |
| Packaging unit | 1 |
| Electrical data Supply | |
| Operating current max. | 1,75 A |
| Industrial communication | |
| Supported protocol | Ethernet |
| Transfer parameters | CAT6A |
| Diagnostics | |
| Status indication LED | no |
| Installation Connection | |
| Width across flats | SW18 |
| Device protection | |
| Shielded | yes |
| Important installation notes | |
| Note on strain relief | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. |
| Note on bending radius | Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |