

MSUD double valve A-18mm with cable

PUR 4x0.75 ye UL/CSA+drag ch. 10m

Art.No.: 7000-58021-0371000

Weight: 0.629 Country of origin: CZ

Model designation: MSKL3-036_150-KL3-037_10.0

Form A (18 mm) 24 V AC ±20% / DC ±25% LED and suppression Connection cable L = 150 mm Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration



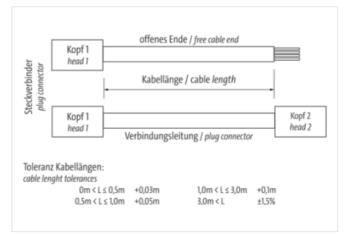


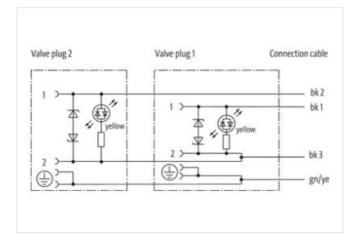

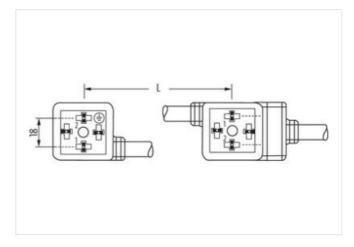



stay connected

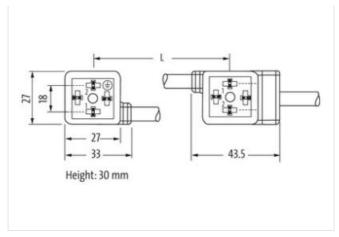

Product may differ from Image



ECLASS-6.1 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060312 ECLASS-10.1 27060312 ECLASS-11.1 27060312 ECLASS-12.0 27060312 ETIM-5.0 ECON855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879496810 EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Electrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC min. 19.2 V Operating voltage AC max. 28.8 V Operating voltage DC min. 18 V	Cable length	10 m	
Tiread M3 M3 M3 M3 M3 M3 M3 M	Side 1		
Tiread M3 M3 M3 M3 M3 M3 M3 M	Tightening torque	0.4 Nm	
Side 2 Tightening torque 0,4 Nm Thread M3 Commercial data ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060312 ECLASS-1.1 27060312 ECLASS-11.1 27060312 ECLASS-12.0 27060312 ETIM-5.0 EC001855 coustoms tariff number 85444290 customs tariff number 85444290 EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Electrical data Drop-out delay time max. Electrical data 20 ms Electrical data Supply Operating voltage AC min. 19.2 V Operating voltage AC max. 28.8 V Operating voltage DC min. 18 V		•	
Tightening torque 0,4 Mm Thread M3 Commercial data ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27229218 ECLASS-8.0 27279218 ECLASS-9.0 27060312 ECLASS-9.0 27060312 ECLASS-10.1 27060312 ECLASS-11.1 27060312 ECLASS-11.1 27060312 ECLASS-10.0 ECO01855 customs tariff number 85444290 customs tariff number 85444290 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879496810 EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Flectrical data Drop-out delay time max. 20 ms Flectrical data Supply Operating voltage AC min. 19.2 V Operating voltage AC max. 28.8 V Operating voltage DC min. 18 V		WO	
Thread M3 Commercial data ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060312 ECLASS-10.1 27060312 ECLASS-11.1 27060312 ECLASS-12.0 27060312 ETIM-5.0 EC01855 customs tariff number 85444290 customs tariff number 85444290 customs tariff number 85444290 customs tariff number 4048879496810 EAN 4048879496810 Packaging unit 1 Packaging unit 1 Pectrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC min. 19.2 V Operating voltage AC min. 24 V Operating voltage DC min. 18 V			
Commercial data ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060312 ECLASS-10.1 27060312 ECLASS-11.1 27060312 ECLASS-12.0 27060312 ETIM-5.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Packaging unit 1 Electrical data Drop-out delay time max. Drop-out delay time max. 20 ms Electrical yoltage AC 24 V Operating voltage AC min. 19,2 V Operating voltage AC min. 19,2 V Operating voltage DC min. 18 V			
ECLASS-6.0 27279218 ECLASS-7.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060312 ECLASS-10.1 27060312 ECLASS-10.1 27060312 ECLASS-11.1 27060312 ECLASS-12.0 27060312 ETIM-5.0 ECOMBS5 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Electrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC min. 19,2 V Operating voltage AC mix. 28,8 V Operating voltage AC mix. 28,8 V Operating voltage DC min. 18 V	Thread	M3	
ECLASS-6.1 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060312 ECLASS-10.1 27060312 ECLASS-11.1 27060312 ECLASS-12.0 27060312 ETIM-5.0 ECON855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879496810 EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Electrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC min. 19.2 V Operating voltage AC max. 28.8 V Operating voltage DC min. 18 V	Commercial data		
ECLASS-7.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060312 ECLASS-10.1 27060312 ECLASS-11.1 27060312 ECLASS-12.0 27060312 ETIM-5.0 EC01855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879496810 EAN 4048879496810 EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Flectrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC min. 18 V	ECLASS-6.0	27279218	
ECLASS-8.0 27279218 ECLASS-9.0 27060312 ECLASS-10.1 27060312 ECLASS-11.1 27060312 ECLASS-12.0 27060312 ETIM-5.0 ECONSTAIR MURICIPAL MEDICAL MEDIC	ECLASS-6.1	27279218	
ECLASS-9.0 27060312 ECLASS-10.1 27060312 ECLASS-11.1 27060312 ECLASS-12.0 27060312 ETIM-5.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Packaging unit 1 Flectrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC min. 18 V	ECLASS-7.0	27279218	
ECLASS-10.1 27060312 ECLASS-11.1 27060312 ECLASS-12.0 27060312 ETIM-5.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Packaging unit 1 Packaging unit 1 Electrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC min. 18 V	ECLASS-8.0	27279218	
ECLASS-11.1 27060312 ECLASS-12.0 27060312 ETIM-5.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Packaging unit 1 Packaging unit 1 Electrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC 024 V Operating voltage AC max. 28,8 V Operating voltage DC min. 18 V	ECLASS-9.0	27060312	
ECLASS-12.0 27060312 ETIM-5.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Packaging unit 1 Packaging unit 1 Pectrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC 24 V Operating voltage AC max. 28,8 V Operating voltage DC min. 18 V	ECLASS-10.1	27060312	
ETIM-5.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Packaging unit 1 Electrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC min. 18 V	ECLASS-11.1	27060312	
customs tariff number 85444290 customs tariff number 85444290 EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Packaging unit 1 Electrical data 20 ms Electrical data Supply V Operating voltage AC 24 V Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC min. 18 V	ECLASS-12.0	27060312	
EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Packaging unit 1 Flectrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC 24 V Operating voltage AC max. 28,8 V Operating voltage DC min. 18 V	ETIM-5.0	EC001855	
EAN 4048879496810 EAN 4048879496810 Packaging unit 1 Packaging unit 1 Electrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC 24 V Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC min. 18 V	customs tariff number	85444290	
EAN 4048879496810 Packaging unit 1 Packaging unit 1 Electrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC min. 18 V	customs tariff number	85444290	
Packaging unit 1 Packaging unit 1 Electrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC 24 V Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC min. 18 V	EAN	4048879496810	
Packaging unit 1 Electrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC 24 V Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC min. 18 V	EAN	4048879496810	
Electrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC 24 V Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC 18 V	Packaging unit	1	
Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC 24 V Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC 18 V	Packaging unit	1	
Electrical data Supply Operating voltage AC 24 V Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC inin. 18 V	Electrical data		
Operating voltage AC 24 V Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC inin. 18 V	Drop-out delay time max.	20 ms	
Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC min. 18 V	Electrical data Supply		
Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC min. 18 V	Operating voltage AC	24 V	
Operating voltage DC 24 V Operating voltage DC min. 18 V	Operating voltage AC min.	19,2 V	
Operating voltage DC min. 18 V	Operating voltage AC max.	28,8 V	
	Operating voltage DC	24 V	
Operating voltage DC max. 30 V	Operating voltage DC min.	18 V	
	Operating voltage DC max.	30 V	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-11-02



stay connected

Cut-off peak voltage max.	55 V
Current operating per contact max.	4 A
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Rated surge voltage	0,8 kV
Mechanical data Material data	oje in
·	
Material housing	Plastic
Color housing	black
Mechanical data Mounting data	
Mounting method	inserted, screwed
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C
Additional condition temperature range	depending on cable quality
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Installation Cable	
	hisali 4, hisali 0, hisali 0, masa mallam
wire arrangement	black 1, black 2, black 3, green-yellow
Cable identification	037 3
Cable Type Printing color of wire insulation	white (isolation black)
Jacket Color	yellow
Type of Certificate	cURus
Amount stranding	1
Stranding	4 wires twisted
wire arrangement	black 1, black 2, black 3, green-yellow
Cable weigth	69,3 g/m
Material jacket	PUR
Shore hardness jacket	90 ± 5 Shore A
Freedom from ingredients (jacket)	lead-free, cadmium-free, CFC-free, halogen-free, silicone-free
Outer-diameter (jacket)	6,5 mm
Tolerance outer diameter (sheath)	± 5 %
Makadal odra bandakar	
Material wire insulation	PP 4
Amount wires Outer diameter insulation	4 1,85 mm
Outer diameter insulation	· · · · · · · · · · · · · · · · · · ·
Outer diameter tolerance core insulation Shore hardness wire insulation	± 5 % 70 ± 5 Shore D
Ingredient freeness wire insulation	lead-free, cadmium-free, CFC-free, halogen-free, silicone-free
Printing color of wire insulation	white (isolation black)
Amount strands (wire)	42
Diameter of single wires	0,15 mm
Conductor crosssection (wire)	0,75 mm ²
Material conductor wire	Stranded copper wire, bare
Conductor type (wire)	strand class 6
Nominal voltage AC max.	300 V
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity (standard) Current load capacity min. wire	to DIN VDE 0298-4 9.6 A
Current load capacity (standard) Current load capacity min. wire Electrical resistance line constant wire	to DIN VDE 0298-4 9,6 A 26 Ω/km @ 20 °C

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-11-02



Power frequency withstand voltage (wire - jacket)	2,5 kV @ 60 s
Min. operating temperature (static)	-40 °C
Max. operating temperature (fixed)	80 °C / 90 °C @ 10000 h Operation
Operating temperature min. (dynamic)	-25 °C
Operating temperature max. (dynamic)	80 °C / 90 °C @ 10000 h Operation
Flame resistance	UL 1581 § 1100 FT2 IEC 60332-2-2 UL 1581 § 1090
chemical resistance	Good, application-related testing
Gasoline resistance	Good, application-related testing
Oil resistance	DIN EN 60811-404 Good, application-related testing
Bending radius (fixed)	5 x Outer diameter
Bending radius (dynamic)	10 x Outer diameter
No. of bending cycles (C-track)	10 Mio. @ 25 °C
Traversing distance (C-track)	10 m @ 25 °C horizontal
Travel speed (C-track)	3 m/s @ 25 °C
No. of torsion cycles	2 Mio.
Torsion stress	± 180 °/m
Torsion speed	35 cycles/min