

MSUD double valve A-18mm with cable

PUR 4x0.75 bk UL/CSA+drag ch. 10m

Art.No.: 7000-58081-6371000

Weight: 0.712 Country of origin: CZ

Model designation: MSKL3-636 300-KL3-637 10.0

Form A (18 mm) 24 V AC ±20% / DC ±25% LED and suppression Connection cable L = 300 mm Bridged PE without cable sleeves

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration




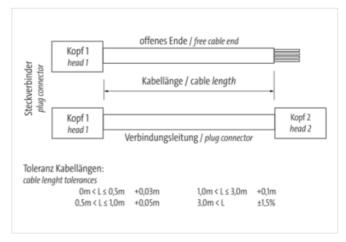

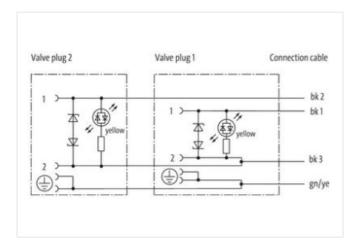

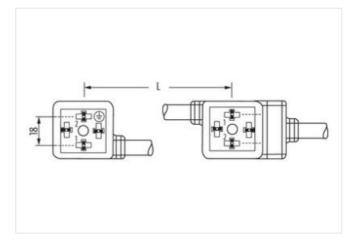



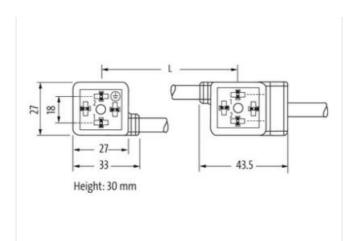

Product may differ from Image

lightening torque 0,4 Nm bread M3 Idatorial PBT Side 2 Ightening torque 0.4 Nm bread M3 Ightening torque 0.4 Nm Commercial data CCLASS-6.0 27279218 CCLASS-6.1 27279218 CCLASS-7.0 27279218 CCLASS-9.0 27060312 CCLASS-9.0 27060312 CCLASS-1.1 27060312 CCLASS-1.1.1 27060312 CCLASS-1.2.0 27060312 CCLASS-1.2.0 27060312 CCLASS-1.3.0 4004312 CCLASS-1.4.0 4004312 CCLASS-1.6.0 4004312 CCLASS-1.1.1 27060312 CCLASS-1.2.0 27060312 CCLASS-1.1.1 27060312 CCLASS-1.2.0 270760312 CCLASS-1.0.0 4004312	Cable length	10 m
Intread M3 Idaterial PBT Side 2 PBT Ightening torque 0,4 Nm Intread M3 Idaterial PBT Commercial data CLASS-6.0 27279218 CLASS-6.1 27279218 CLASS-7.0 27279218 CLASS-8.0 27279218 CLASS-9.0 27060312 CLASS-9.0 27060312 CLASS-11.1 27060312 CLASS-12.0 27060312 CLASS-12.0 27060312 CLASS-12.0 ECON1855 ustoms tariff number 85444290 AN 4048879577649 AN 4048879577649 ASA ASA 4048879577649 ASA ASA Cleaterical data Use production of the pr	Side 1	
Side 2	Tightening torque	0,4 Nm
Side 2	Thread	M3
Ightening torque 0,4 Nm Inread M3 Idaterial PBT Commercial data CCLASS-6.0 27279218 CCLASS-6.1 27279218 CCLASS-7.0 27279218 CCLASS-8.0 27279218 CCLASS-9.0 27060312 CCLASS-9.0 27060312 CCLASS-1.1 1 27060312 CCLASS-1.0 1 27079218 CC	Material	PBT
M3	Side 2	
Material PBT	Tightening torque	0,4 Nm
Commercial data CCLASS-6.0 27279218 CCLASS-6.1 27279218 CCLASS-7.0 27279218 CCLASS-9.0 27269218 CCLASS-9.0 27060312 CCLASS-9.0 27060312 CCLASS-10.1 27060312 CCLASS-10.1 27060312 CCLASS-11.1 27060312 CCLASS-12.0 27060312 CCLASS-12.0 27060312 CCLASS-12.0 12060312 CCLASS-13.1 12060312 CCLASS-10.1	Thread	M3
CLASS-6.0 27279218 CLASS-6.1 27279218 CLASS-7.0 27279218 CLASS-8.0 27279218 CLASS-9.0 27060312 CLASS-10.1 27060312 CLASS-11.1 27060312 CLASS-12.0 27060312 CLASS-12.0 27060312 CLASS-14.0 27060312 CLASS-15.0 4 27060312 CLASS-16.1 27060312 CLASS-17.0 4 27060312 CLASS-18.0 27060312 CLASS-18.0 27060312 CLASS-19.0 27060312 CLASS-1	Material	PBT
CLASS-6.1 27279218 CLASS-7.0 27279218 CLASS-8.0 27279218 CLASS-9.0 27060312 CLASS-10.1 27060312 CLASS-11.1 27060312 CLASS-11.1 27060312 CLASS-12.0 27060312 CLASS-12.0 27060312 CLASS-14.0 EC01855 ustoms tariff number 85444290 ustoms tariff number 85444290 AN 4048879577649 AN 4048879577649 AN 4048879577649 Ecctrical data Drop-out delay time max. 20 ms Electrical data Supply Operating voltage AC min. 19,2 V Operating voltage AC min. 19,2 V Operating voltage AC min. 19,2 V Operating voltage AC min. 18 V Operating voltage DC min. 19,2 V Operating voltage DC min. 18 V Operating voltage DC min. 18 V	Commercial data	
CLASS-7.0 27279218 CLASS-8.0 27279218 CLASS-9.0 27660312 CLASS-10.1 27060312 CLASS-11.1 27060312 CLASS-12.0 27060312 CTIM-5.0 EC001855 ustoms tariff number 85444290 ustoms tariff number 85444290 VAN 4048879577649 VAN 4048879577649 Vackaging unit 1 Electrical data 20 ms Perenting voltage AC max. 20 ms Electrical data Supply 20 perating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC min. 18 V Operating voltage DC min. 18 V Operating voltage DC min. 18 V	ECLASS-6.0	27279218
CLASS-8.0 27279218 CLASS-9.0 27060312 CLASS-10.1 27060312 CLASS-11.1 27060312 CLASS-12.0 27060312 CLASS-12.0 ECUNES5 ustoms tariff number 85444290 ustoms tariff number 85444290 ustoms tariff number 85444290 iax 4048879577649 iax	ECLASS-6.1	27279218
CLASS-9.0 27060312 CLASS-10.1 27060312 CLASS-11.1 27060312 CLASS-12.0 27060312 CLASS-12.0 ECO1855 Ustoms tariff number 85444290 Ustoms tariff number 8544429 Ustoms tariff number 85444290 Ustoms tariff number 85444290	ECLASS-7.0	27279218
CLASS-10.1 27060312 CLASS-12.0 27060312 CLASS-12.0 EC001855 ustoms tariff number 85444290 ustoms tariff number 85444290 AVAID	ECLASS-8.0	27279218
CLASS-11.1 27060312 CLASS-12.0 27060312 CITIM-5.0 EC001855 ustoms tariff number 85444290 ustoms tariff number 85444290 AVAIN 4048879577649 AVAIN 4	ECLASS-9.0	27060312
CLASS-12.0 27060312 ETIM-5.0 EC001855 ustoms tariff number 85444290 Ustoms tariff number 85444290 AN 4048879577649 AN 4048879577649 Packaging unit 1 Packaging unit 1 Percetrical data 20 ms Percetrical data Supply 20 ms Deparating voltage AC 24 V Operating voltage AC max. 28.8 V Operating voltage DC max. 24 V Operating voltage DC min. 18 V Operating voltage DC max. 30 V	ECLASS-10.1	27060312
ETIM-5.0 EC001855 ustoms tariff number 85444290 ustoms tariff number 85444290 AN 4048879577649 An 4048879 An 4048879 An 40488	ECLASS-11.1	27060312
ustoms tariff number 85444290 ustoms tariff number 85444290 AN 4048879577649 AN 4048879577649 Ackaging unit 1 Ackaging unit 1 Electrical data Prop-out delay time max. 20 ms Electrical data Supply Operating voltage AC 24 V Operating voltage AC max. 28,8 V Operating voltage DC max. 30 V	ECLASS-12.0	27060312
SAN 4048879577649 404887	ETIM-5.0	EC001855
4048879577649 4048879577649 40ckaging unit 41 4ckaging unit 40ckaging unit 41 4ckaging unit 40ckaging unit 40ckaging unit 41 4ckaging unit 40ckaging unit 40	customs tariff number	85444290
ANN 4048879577649 Packaging unit 1 Packaging unit 2 Packaging unit 1 Packaging unit 2 Packa	customs tariff number	85444290
Packaging unit Packag	EAN	4048879577649
Packaging unit Electrical data Prop-out delay time max. Departing voltage AC Proparting voltage AC min. Proparting voltage AC max. Proparting voltage AC max. Proparting voltage AC max. Proparting voltage DC Proparting voltage DC Proparting voltage DC min. Proparting voltage DC max. Propar	EAN	4048879577649
Electrical data Propout delay time max. 20 ms Electrical data Supply Operating voltage AC 24 V Operating voltage AC min. Operating voltage AC max. Operating voltage AC max. Operating voltage DC 24 V Operating voltage DC min. Operating voltage DC min. 18 V Operating voltage DC max. 30 V	Packaging unit	1
Prop-out delay time max. 20 ms Electrical data Supply Operating voltage AC 24 V Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC 34 V Operating voltage DC 35 V Operating voltage DC min. 18 V Operating voltage DC max. 30 V	Packaging unit	1
Electrical data Supply Operating voltage AC 24 V Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC min. 18 V Operating voltage DC max. 30 V	Electrical data	
Operating voltage AC 24 V Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC min. 18 V Operating voltage DC max. 30 V	Drop-out delay time max.	20 ms
Operating voltage AC min. 19,2 V Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC min. 18 V Operating voltage DC max. 30 V	Electrical data Supply	
Operating voltage AC max. 28,8 V Operating voltage DC 24 V Operating voltage DC min. 18 V Operating voltage DC max. 30 V	Operating voltage AC	24 V
Operating voltage DC 24 V Operating voltage DC min. 18 V Operating voltage DC max. 30 V	Operating voltage AC min.	19,2 V
Operating voltage DC min. 18 V Operating voltage DC max. 30 V	Operating voltage AC max.	28,8 V
Operating voltage DC max. 30 V	Operating voltage DC	
	Operating voltage DC min.	18 V
out off neek veltere may	Operating voltage DC max.	
•	Cut-off peak voltage max.	55 V
Current operating per contact max. 4 A	Current operating per contact max.	4 A



stay connected

Current consumption max.	15 mA
Diagnostics	
Status indication LED	yellow
Device protection Electrical	,
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	· · · · · · · · · · · · · · · · · · ·
Pollution Degree	inserted, screwed 3
Rated surge voltage	0,8 kV
Material group (IEC 60664-1)	I I
Additional suppressor	Diode, Z-Diode
Mechanical data	bload, 2 bload
Contour for corrugated hose	without
Mechanical data Material data	
Color housing	black
Coating locking	galvanized
Material gasket	PUR
Locking material	Steel
Mechanical data Mounting data	
Mounting method	inserted, screwed
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C
Additional condition temperature range	depending on cable quality
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Installation Cable	
wire arrangement	black 1, black 2, black 3, green-yellow
Cable identification	637
Cable Type	3
Printing color of wire insulation	white (isolation black)
Jacket Color	black
Type of Certificate	cURus
Amount stranding	1
Stranding	4 wires twisted
wire arrangement	black 1, black 2, black 3, green-yellow
Cable weigth	69,3 g/m
Material jacket	PUR
Shore hardness jacket	90 ± 5 Shore A
Freedom from ingredients (jacket)	lead-free, cadmium-free, CFC-free, halogen-free, silicone-free
Outer-diameter (jacket)	6,5 mm
Tolerance outer diameter (sheath)	± 5 %
Material wire insulation	PP
Amount wires	4
Outer diameter insulation	1,85 mm
Outer diameter tolerance core insulation	± 5 %
Shore hardness wire insulation	70 ± 5 Shore D
Ingredient freeness wire insulation	lead-free, cadmium-free, CFC-free, halogen-free, silicone-free
Printing color of wire insulation	white (isolation black)
Amount strands (wire)	42



stay connected

Diameter of single wires	0,15 mm
Conductor crosssection (wire)	0,75 mm²
Material conductor wire	Stranded copper wire, bare
Conductor type (wire)	strand class 6
Nominal voltage AC max.	300 V
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity min. wire	9,6 A
Electrical resistance line constant wire	26 Ω/km @ 20 °C
AC withstand voltage (wire - wire)	2,5 kV @ 60 s
Power frequency withstand voltage (wire - jacket)	2,5 kV @ 60 s
Min. operating temperature (static)	-40 °C
Max. operating temperature (fixed)	80 °C / 90 °C @ 10000 h Operation
Operating temperature min. (dynamic)	-25 °C
Operating temperature max. (dynamic)	80 °C / 90 °C @ 10000 h Operation
UV resistance	DIN EN ISO 4892-2 A
Flame resistance	UL 1581 § 1100 FT2 IEC 60332-2-2 UL 1581 § 1090
chemical resistance	Good, application-related testing
Gasoline resistance	Good, application-related testing
Oil resistance	DIN EN 60811-404 Good, application-related testing
Bending radius (fixed)	5 x Outer diameter
Bending radius (dynamic)	10 x Outer diameter
No. of bending cycles (C-track)	10 Mio. @ 25 °C
Traversing distance (C-track)	10 m @ 25 °C horizontal
Travel speed (C-track)	3 m/s @ 25 °C
No. of torsion cycles	2 Mio.
Torsion stress	± 180 °/m
Torsion speed	35 cycles/min