

MSUD double valve BI-11mm with cable

PUR 4x0.75 ye UL/CSA+drag ch. 3m

Art.No.: 7000-58101-0370300

Weight: 0.242 kg Country of origin: CZ

Model designation: MSLL3-036_100-LL3_037_3.0

Form BI (11 mm)

24 V AC ±20% / DC ±25% LED and suppression

Connection cable L = 100 mm

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration






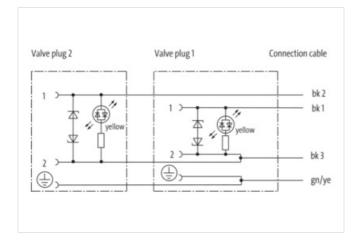


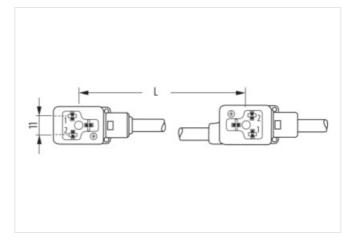




stay connected

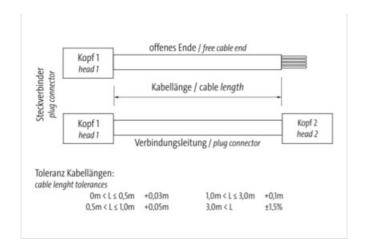

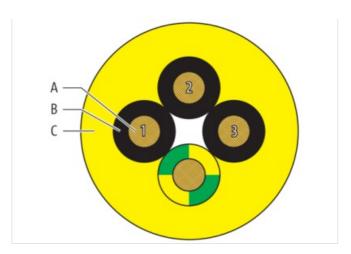



Product may differ from Image







Header	
Material short text	MSLL3-036_100-LL3_037_3.0
Cable length	3,00 m
Side 1	
Threaded hole	M3x31
Tightening torque	0,4 Nm
Side 2	
Threaded hole	M3x31
Tightening torque	0,4 Nm
Commercial data	
URL Webshop	https://shop.murrelektronik.com/7000-58101-0370300
GTIN	4048879303347
ECLASS-6.0	27279218
ECLASS-6.1	27279218
ECLASS-7.0	27279218
ECLASS-7.1	27279218
ECLASS-8.0	27279218



stay connected

FOLACC 0.4	07070010
ECLASS-8.1	27279218
ECLASS-9.0	27060312
ECLASS-9.1 ECLASS-10.0.1	27060312 27060312
ECLASS-10.0.1	
ECLASS-10.1 ECLASS-11.0	27060312
	27060312
ECLASS-11.1	27060312
ECLASS-12.0	27060312
ECLASS-13.0	27060312
ECLASS-14.0	27060312
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855
ETIM-8.0	EC001855
customs tariff number	85444290
EAN	4048879303347
Packaging unit	1
Electrical data	
Drop-out delay time max.	20 ms
Electrical data Supply	
Operating voltage AC	24 V
Operating voltage AC min.	19,2 V
Operating voltage AC max.	28,8 V
Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Current operating per contact max.	4 A
Cut-off peak voltage max.	55 V
Current consumption max.	12 mA
Diagnostics	
Status indication LED	yellow
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Rated surge voltage	0,8 kV
Mechanical data Material data	
Material housing	Plastic
Color housing	black
Mechanical data Mounting data	
Mounting method	
	inserted, screwed
Environmental characteristics Climatic	inserted, screwed
	inserted, screwed -25 °C
Environmental characteristics Climatic	
Environmental characteristics Climatic Operating temperature min.	-25 °C
Environmental characteristics Climatic Operating temperature min. Operating temperature max.	-25 °C 85 °C
Environmental characteristics Climatic Operating temperature min. Operating temperature max. Additional condition temperature range	-25 °C 85 °C depending on cable quality Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be
Environmental characteristics Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes	-25 °C 85 °C depending on cable quality
Environmental characteristics Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on bending radius	-25 °C 85 °C depending on cable quality Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Environmental characteristics Climatic Operating temperature min. Operating temperature max. Additional condition temperature range Important installation notes Note on bending radius Note on strain relief	-25 °C 85 °C depending on cable quality Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-12-14



stay connected

Amount stranding	1
Stranding	4 wires stranded
Cable weigth	63 g/m
Material wire insulation	PP
Amount wires	4
Outer diameter insulation	1,85 mm
Outer diameter tolerance core insulation	± 0,1 mm
Shore hardness wire insulation	70 ± 5 Shore D
Ingredient freeness wire insulation	lead-free, cadmium-free, CFC-free, halogen-free, silicone-free
Printing color of wire insulation	white (isolation black)
Amount strands (wire)	42
Diameter of single wires	0,15 mm
Conductor crosssection (wire)	0,75 mm²
Material conductor wire	Stranded copper wire, bare
Conductor type (wire)	strand class 6
Outer-diameter (jacket)	6,5 mm
Tolerance outer diameter (sheath)	± 5 %
Material jacket	PUR
Shore hardness jacket	90 ± 5 Shore A
Freedom from ingredients (jacket)	lead-free, cadmium-free, CFC-free, halogen-free, silicone-free
Material property (jacket)	abrasion-resistant, low adhesion, good machinability, matte
Conductor resistance (wire)	26 Ω/km @ 20 °C
Nominal voltage AC max.	300 V
Withstand voltage (wire - wire)	2.5 kV @ 60 s
Withstand voltage (wire - jacket)	2.5 kV @ 60 s
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity min. wire	9,6 A
Min. operating temperature (static)	-40 °C
Max. operating temperature (static)	80 °C / 90 °C @ 10000 h Operation
Operating temperature min. (dynamic)	-25 °C
Operating temperature max. (dynamic)	80 °C / 90 °C @ 10000 h Operation
Operating temperature min. (drag chain)	-25 °C
Operating temperature max. (drag chain)	80 °C / 90 °C @ 10000 h Operation
Flame resistance	UL 1581 § 1090, CSA FT2, IEC 60332-2-2
Oil resistance	IEC 60811-404
Chemical resistance	good
Other resistances	good resistance to gasoline, resistant to hydrolysis, resistant to microbes
Bending radius (fixed)	5 × Outer diameter
Bending radius (dynamic)	10 × Outer diameter
No. of bending cycles (C-track)	10 Mio. @ 25 °C
Traversing distance (C-track)	10 m @ 25 °C horizontal
Travel speed (C-track)	3 m/s @ 25 °C
Acceleration (C-track)	10 m/s² @ 25 °C
No. of torsion cycles	2 Mio.
Torsion stress	± 180 °/m
Torsion speed	35 cycles/min