

M8 male 0° / M8 female 90° A-cod.

PVC 3x0.25 ye UL/CSA 0.6m

Art.No.: 7000-88021-0100060

Weight: 0.024 Country of origin: US

Model designation: MSGL0-H-R010_0.6

Advantages of our connectors:

Our connectors are versatile and specially optimised for industrial environments. All connectors are 100% tested during the manufacturing process to ensure the highest quality and reliability.

The contacts are gold-plated, which ensures optimum conductivity. Thanks to the high degree of protection, the connectors are ideal for demanding industrial environments. They are also vibration-resistant - this is ensured by the union nut with vibration protection.

Our connectors are resistant to oils and cooling lubricants, but resistance to aggressive media should be tested for each specific application. Different cable lengths available on request

If you are missing technical information? Please feel free to use our dictionary to find more technical details.

Product details:

Male straight - female 90°

M8 - M8, 3-pole

Art-No. 7005 - M8 Lite - (plastic hexagonal screw) on request

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product


Illustration




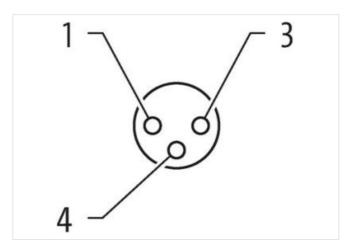






stay connected

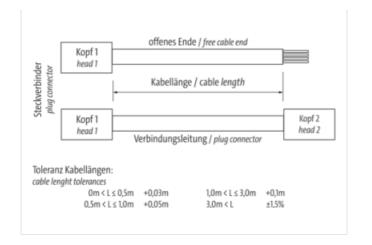

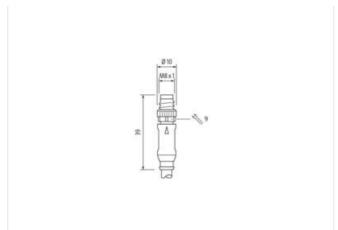

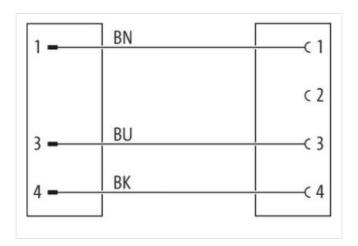

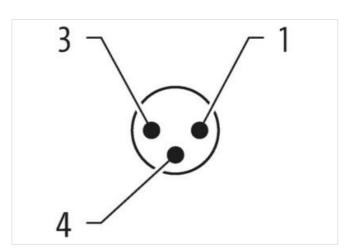

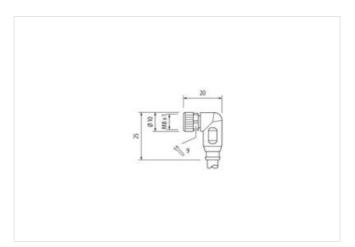

Product may differ from Image











Cable length

0,6 m

Side 1

Tightening torque

0,4 Nm



stay connected

Mounting method	inserted, screwed
Coating contact	gold plated
Family construction form	M8
Thread	M8 x 1
suitable for corrugated tube (internal Ø)	6.5 mm
Gender	male
Cable outlet	straight
Coding	A A
Material contact	Copper alloy
Material Contact	PUR
No. of poles	3
Width across flats	SW9
Degree of protection (EN IEC 60529)	IP65, IP66K, IP67
Side 2	
Tightening torque	0,4 Nm
Mounting method	inserted, screwed
Coating contact	gold plated
Family construction form	M8
Thread	M8 x 1
Gender	female
suitable for corrugated tube (internal Ø)	6,5 mm
Cable outlet	angled
Coding	A
Material contact	Copper alloy
Material	PUR
No. of poles	3
Width across flats	SW9
Degree of protection (EN IEC 60529)	IP65, IP66K, IP67
Commercial data	
ECLASS-6.0	27279218
ECLASS-6.0 ECLASS-6.1	27279218
ECLASS-7.0 ECLASS-8.0	27279218
	27279218
ECLASS-9.0	27060311
ECLASS-10.1	27060311
ECLASS-11.1	27060311
ECLASS-12.0	27060311
ETIM-5.0	EC001855
customs tariff number	85444290
customs tariff number	85444290
EAN	4048879129497
EAN	4048879129497
Packaging unit	1
Packaging unit	1
Electrical data Supply	
Operating voltage AC max.	50 V
Operating voltage DC max.	60 V
Current operating per contact max.	4 A
Diagnostics	
Status indication LED	no
	nu
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP65, IP67, IP68, IP66K
· · · · · · · · · · · · · · · · · · ·	



stay connected

Coating locking Nickreled PFM Millotrial gasket FFM Millotrial gasket FFM Millotrial gasket FFM Mounting method Inserted, screwed, Shaking protection Fervioremental characteristics Climatic Coperating temperature min. -30 °C Coperating temperature man, -30 °C Controlling manufacture man, -30 °C Controlling man,		
Retend surge vootage 1,5 kV Material group (EC 80984 1) 1 Material group (EC 80984 1) 1 Material pusion PUR Cooling hosting PUR Cooling naterial December PKM Material gasion PKM Material gasion PKM Mounting method Inserted, scrowed, Shaking protection Environmental characteristics Climatic Environmental characteristics Climatic Poperating temperature min. 30 °C Operating temperature min. 30 °C Operating temperature min. 30 °C Operating temperature min. 40 °C Operating temperature min. 55 °C Additional condition temperature arge depending on cable quality Important installation notes Note on banding radius Attention Concept the permittible bending radiu when laying cables, as the IP protection dass can be endangered by excessive bending forces. Centermity Weis arrangement Dink EN 61076-2-114 (M8) Installation Cable Weis arrangement Dink EN 61076-2-114 (M8) Dink EN 61076-2	· -	· · · · · · · · · · · · · · · · · · ·
Meterial group (IEC 606641) Mechanical data Material Mat		
Mocenarical data Material data Mocenarical councing PUR Cootanting locksing Nickeled Meterial passet FKM Locking material Zinc discassing Mechanical data Mounting data Vincender and Commental characteristics Climatics Environmental characteristics Climatics Fermion programments Environmental characteristics Climatics 65° C Operating temperature min. 40° C Operating temperature max. 85° G Additional condition temperature range depending on cabbe quality Important installation notes Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Note on bending radius Attention. Conserve the permissibility bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. Product standard DIN EN 61076-2-114 (Ms) Installation Cabbe Dividenal protection class can be endangered by excessive bending forces. Cable Type 1 Cable Stype 1 Cable Growing Controlled Cooling to the protection class can be endangered by excessive bending forces. Cable Type 1 Cable Growing Cooling C		1,5 kV
Material housing PUR Coaling tocking Nickoeld Material gastet FKM Locking material Zinc dis-casting Mechanical data Mounting data Image: Coaling to Mounting data Mounting data Mounting method Inserted, screwed, Shaking protection Environmental characteristics Climatic Operating temperature min. -90 °C Operating temperature max. 85 °C Additional condition temperature range depending on cable quality Important installation notes Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Note on bending radius Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Conformity Product standard Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Product standard Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Conformity Protect standards Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Conformity Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Conformity Product standards Pro	Material group (IEC 60664-1)	I
Coating tocking Nickreid pasket PKM Micerial gasket PKM Locking material 2nd exacting Mounting method Inserted, serewed, Shaking protection Environmental characteristics Climate Protection temperature min 30 °C Operating temperature min 30 °C Operating temperature may 85 °C Additional condition temperature range depending on cable quality Important installation notes Note on stain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Note on bending radius Attention: Observe the permissible bending radis when laying cables, as the IP protection class can be ondangered by accessive bending forces. Conformity Were arrangement Dirow, black, blue Cable institution Cable Were arrangement brown, black, blue Cable institution Cable Were arrangement Cable institution Were arrangement Cable insti	Mechanical data Material data	
Mounting method inserted, Screwed, Shaking protection Environmental characteristics Climatic Operating temperature min. So °C Operating temperature min. So °C Operating temperature min. So °C Operating temperature min. Additional condition temperature range depending on cable quality Important installation notes Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Note on bending radius Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. Contornity Product standard DIN EN 61076-2-114 (MB) Installation (Cable wire arrangement bown, black, blue Cable identification 0 100 Cable Type 1 1 Jackset Color yellow Jackset William Jackset Jack	Material housing	PUR
Locking material Zinc de-casting Mechanical data Mounting data Mounting method inserted, screwed, Shaking protection Environmental characteristics Climatic Operating temperature min. 30 °C Additional condition temperature range depending on cable quality Important installation notes Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Note on tending radius Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. Conformity Product standard DIN EN 61076 2-114 (M8) Installation Cable wire arrangement brown, black, blue Cable identification 010 Cable Type 1 1 2acket Color yellow Type of Certificate cURus Amount stranding 1 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weigh 29,37 gm Material picket PVC Shore handness jacket PVC Shore handness jacket PVC Amount wires 3 Outer diameter (slecket) 4,5 mm Outer diameter (slecket) 1,25 mm Outer diameter insulation 2,25 mm Material properties wire insulation 1,25 mm Outer diameter insulation 2,25 mm Material properties wire insulation 1,25 mm Outer diameter insulation 2,25 mm Alterial properties wire insulation 1,25 mm Outer diameter insulation 3,00 y y Current load capacity (standard) 1,01 NVDE 0298-4	Coating locking	Nickeled
Mounting method inserted, screwed. Shaking protection Environmental characteristics Climatic Operating temperature min. Operating temperature max. 85 °C Additional condition temperature max. 86 °C Additional condition temperature range depending on cable quality Important installation notes Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. Contomity Product standard DIN EN 61076-2-114 (M8) Installation Cable wire arrangement Drown, black, blue Cable in yellow URUs Annount stranding 1 Stranding 3 wires wireled Wire arrangement Drown, black, blue Cable weight Dispersion of the permission of the province of the permission of the province of the permission of the permi	Material gasket	FKM
Mounting method inserted, screwed. Shaking protection Environmental Characteristics Climatic Operating temperature max. 85 °C Additional condition temperature may depending on cable quality Important installation notes Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g., by the usage of cable ties. Note on bending radius Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. Conformity Product standard DIN EN 81076-2-114 (M8) Installation Cable I	Locking material	Zinc die-casting
Environmental characteristics Climatic Operating temperature min. 56 °C Additional condition temperature range depending on cable quality Important installation notes Note on strain relief Note on bending radius Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. Conformity Product standard DIN EN 61076-2-114 (M8) Installation Cable wire arrangement brown, black, blue Cable identification Old Cable Type 1 1 Jacket Color yellow Stranding 1 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weight 29,37 g/m Matterial picket PVC Shore hardness jacket 18 5 £ 5 Shore A Freedom from impedients (jacket) 19 Lead-free, cadmium-free, CFC-free, silicone-free Outer diameter (jacket) 1,25 mm Outer diameter (jacket) 1,25	Mechanical data Mounting data	
Operating temperature min.	Mounting method	inserted, screwed, Shaking protection
Operating temperature max. 85 °C depending on cable quality depending on cable quality moporatin installation notes with the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. Conformity Product standard DIN EN 61076-2-114 (M8) Installation Cable Total To	Environmental characteristics Climatic	
Additional condition temperature range inportant installation notes Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. Conformity Product standard DIN EN 61076-2-114 (M8) Installation Cable wire arrangement brown, black, blue Cable identification 010 Cable identification 010 Cable identification 010 Cable identification 010 Catle identification 010 Catle identification 010 Catle identification 010 Catle identification 010 Stranding 1 Stranding 1 Stranding 1 Stranding 1 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weight 29,379 yim Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material properties wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter insulation 900 machinability Ingredient freeness wire insulation 45 ± 5 Shore D Material properties wire insulation 900 machinability Ingredient freeness wire insulation 900 machinability Ingredient freeness wire insulation 1,25 mm Outer diameter tolerance core insulation 900 machinability Ingredient freeness wire insulation 1,25 mm Outer diameter insulation 900 machinability Ingredient freeness wire insulation 1,25 mm Outer diameter for single wires 0,15 mm Conductor type (wire) Stranded copper wire, bare Conductor type (wire) Stranded copper wire, bare Conductor type (wire) Stranded copper wire, bare Conductor type (wire) 14 Current load capacity (standard) 1,05 N/DE 0298-4 Current load capacity (standard) 1,05 N/DE 0298-4	Operating temperature min.	-30 °C
Additional condition temperature range important installation notes Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. Conformity Product standard DIN EN 61076-2-114 (M8) Installation Cable wire arrangement brown, black, blue Cable identification 010 Cable identification 010 Cable identification 010 Cathe identification 010 Cathe identification 010 Cathe identification 010 Stranding 11 Stranding 11 Stranding 11 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weight 29,377 g/m Material jacket PVC Shore hardness jacket 85 ± Shore A Freedom from ingredients (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material properties wire insulation 1,25 mm Outer diameter insulation 45 ± 5 Shore D Material properties wire insulation 900 machinability ingredient free swire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Sh	Operating temperature max.	85 °C
Important installation notes Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Note on bending radius Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be entangered by excessive bending forces. Conformity Product standard DIN EN 61076-2-114 (M8) Installation (Cable Wire arrangement brown, black, blue Cable identification 010 Cable control of the cont		depending on cable quality
Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. Conformity Product standard DIN EN 61076-2-114 (M8) Installation Cable wire arrangement brown, black, blue Cable identification 010 Cable Type 1 Lacket Color yellow Type of Certificate UURus Amount stranding 1 Stranding 3 wires wisted wire arrangement brown, black, blue Cable weigh 29,37 g/m Material jacket PVC Shore hardness jacket 8£ 5 Shore A Freedom from ingredients (jacket) lead-ree, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) £5 % Material wire insulation PVC Amount wires 3 Outer diameter tolerance core insulation poor machinability Ingredient treness wire insulation poor machinability Ingredi		
Attention: Observe the permissible bending radii when laying cables, as the IP prolection class can be endangered by excessive bending forces. Conformity Product standard DIN EN 61076-2-114 (M8) Installation Cable wire arrangement brown, black, blue Cable identification 010 Cable identification 010 Cable identification 010 Catelicate Color yellow Type of Certificate cURus Amount stranding 1 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weight 29.37 g/m Material packet PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 45 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter insulation 1,25 mm Outer diameter insulation 1,25 mm Cuter diameter insulation 1,25 mm Material properties wire insulation 1,26 mm Couter diameter swire insulation 1,26 mm Couter diameter of single wires 0,15 mm Couter diameter of single wires 0,15 mm Conductor crosssection (wire) 1,4 Diameter of single wires 0,15 mm Conductor crosssection (wire) 5 stranded copper wire, bare Conductor type (wire) 5 strand class 5 Nominal voltage AC max. 300 V Current load capacity min. wire 4,5 A	•	District the connectors by witchie macrons from machine lands as the theory of which
Conformity Product standard DIN EN 61076-2-114 (M8) Installation Cable wire arrangement brown, black, blue Cable identification 010 Cable Type 1 Jacket Color yellow Type of Certificate cURus Amount stranding 1 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weight 29.37 g/m Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4.5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter tolerance core insulation ± 5 % Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0.15 mm	Note on strain reliet	, , , , , , , , , , , , , , , , , , , ,
Product standard DIN EN 61076-2-114 (M8) Installation Cable wire arrangement brown, black, blue Cable (entification) 010 Cable Type 1 Jacket Color yellow Type of Certificate CURus Amount stranding 1 Stranding 1 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weigth 29.37 g/m Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) 1 sad-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter tolerance core insulation ± 5 % Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 1 cad-free, cadmium-free, CFC-free, silicone-free Amount strands (wire)	Note on bending radius	
Installation Cable wire arrangement brown, black, blue Cable (dentification) 010 Cable Type 1 Jacket Color yellow Type of Certificate cURus Amount stranding 1 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weigth 29.37 g/m Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wris insulation 1,25 mm Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation \$ ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation 40 ± 5 ± 5 Shore D Ingredient freeness wire insulation 10 ± 5 ± 5 Shore D Ingredient freeness wire insulation lead-free, cadmium-free, CFC-	Conformity	
wire arrangement brown, black, blue Cable identification 010 Cable Type 1 Jacket Color yellow Type of Certificate cURus Amount stranding 1 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weight 29,37 g/m Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter isulation PVC Amount wires 3 Outer diameter isulation 1,25 mm Outer diameter isulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15	Product standard	DIN EN 61076-2-114 (M8)
Cable identification 010 Cable Type 1 Jacket Color yellow Type of Certificate cURus Amount stranding 1 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weight 29,37 g/m Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter insulation 1,25 mm Outer diameter insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm <td< td=""><td>Installation Cable</td><td></td></td<>	Installation Cable	
Cable Type 1 Jacket Color yellow Type of Certificate cURus Amount stranding 1 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weigth 29,37 g/m Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation ± 5 % Shore hardness wire insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Strand class 5	wire arrangement	brown, black, blue
Jacket Color yellow Type of Certificate cURus Amount stranding 1 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weigth 29.37 g/m Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material properties wire insulation strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 02	Cable identification	010
Type of Certificate cURus Amount stranding 1 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weigith 29,37 g/m Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standar	Cable Type	1
Amount stranding 1 Stranding 3 wires twisted wire arrangement brown, black, blue Cable weigth 29,37 g/m Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation 45 ± 5 Shore D Material properties wire insulation 45 ± 5 Shore D Material properties wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Curren	Jacket Color	yellow
Stranding 3 wires twisted wire arrangement brown, black, blue Cable weigth 29,37 g/m Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation ± 5 % Shore hardness wire insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Stranded capacity (standard) to DIN VDE 0298-4 Current load capacity (standard) Current load capacity min. wire 4,5 A	Type of Certificate	cURus
wire arrangement brown, black, blue Cable weigth 29,37 g/m Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation ± 5 % Shore hardness wire insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity min. wire 4,5 A	Amount stranding	1
Cable weight 29,37 g/m Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation ± 5 % Shore hardness wire insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Stranding	3 wires twisted
Material jacket PVC Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation ± 5 % Shore hardness wire insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	wire arrangement	brown, black, blue
Shore hardness jacket 85 ± 5 Shore A Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation ± 5 % Shore hardness wire insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Cable weigth	29,37 g/m
Freedom from ingredients (jacket) Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) As 5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation 45 ± 5 Shore D Material properties wire insulation Material properties wire insulation fingredient freeness wire insulation good machinability Ingredient freeness wire insulation Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Material jacket	PVC
Outer-diameter (jacket) 4,5 mm Tolerance outer diameter (sheath) ± 5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation ± 5 % Shore hardness wire insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Shore hardness jacket	85 ± 5 Shore A
Tolerance outer diameter (sheath) ±5 % Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation ±5 % Shore hardness wire insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Freedom from ingredients (jacket)	lead-free, cadmium-free, CFC-free, silicone-free
Material wire insulation PVC Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation ± 5 % Shore hardness wire insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Outer-diameter (jacket)	4,5 mm
Amount wires 3 Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation ±5 % Shore hardness wire insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Tolerance outer diameter (sheath)	±5%
Outer diameter insulation 1,25 mm Outer diameter tolerance core insulation ± 5 % Shore hardness wire insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Material wire insulation	PVC
Outer diameter tolerance core insulation ±5 % Shore hardness wire insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Amount wires	3
Shore hardness wire insulation 45 ± 5 Shore D Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Outer diameter insulation	1,25 mm
Material properties wire insulation good machinability Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Outer diameter tolerance core insulation	±5%
Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free Amount strands (wire) 14 Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Shore hardness wire insulation	45 ± 5 Shore D
Amount strands (wire) Diameter of single wires O,15 mm Conductor crosssection (wire) O,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Material properties wire insulation	good machinability
Diameter of single wires 0,15 mm Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Ingredient freeness wire insulation	lead-free, cadmium-free, CFC-free, silicone-free
Conductor crosssection (wire) 0,25 mm² Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Amount strands (wire)	14
Material conductor wire Stranded copper wire, bare Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Diameter of single wires	0,15 mm
Conductor type (wire) Strand class 5 Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Conductor crosssection (wire)	0,25 mm ²
Nominal voltage AC max. 300 V Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Material conductor wire	Stranded copper wire, bare
Current load capacity (standard) to DIN VDE 0298-4 Current load capacity min. wire 4,5 A	Conductor type (wire)	Strand class 5
Current load capacity min. wire 4,5 A	Nominal voltage AC max.	300 V
	Current load capacity (standard)	to DIN VDE 0298-4
Electrical resistance line constant wire 79 Ω/km @ 20 °C	Current load capacity min. wire	4,5 A
	Electrical resistance line constant wire	79 Ω/km @ 20 °C

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-11-05



AC withstand voltage (wire - wire)	2 kV @ 60 s
Power frequency withstand voltage (wire - jacket)	2 kV @ 60 s
Min. operating temperature (static)	-30 °C
Max. operating temperature (fixed)	80 °C
Operating temperature min. (dynamic)	-5 °C
Operating temperature max. (dynamic)	80 °C
Flame resistance	UL 1581 § 1100 FT2 IEC 60332-2-2 UL 1581 § 1090
chemical resistance	Good, application-related testing
Gasoline resistance	Good, application-related testing
Oil resistance	Good, application-related testing DIN EN 60811-404
Bending radius (fixed)	5 x Outer diameter
Bending radius (dynamic)	10 x Outer diameter