

M8 male 0° / M8 female 90° A-cod.

PUR 3x0.25 gy UL/CSA+drag ch. 10m

Art.No.: 7000-88021-2301000

Weight: 0.245 Country of origin: US

Model designation: MSGL0-H-R230_10.0

Advantages of our connectors:

Our connectors are versatile and specially optimised for industrial environments. All connectors are 100% tested during the manufacturing process to ensure the highest quality and reliability.

The contacts are gold-plated, which ensures optimum conductivity. Thanks to the high degree of protection, the connectors are ideal for demanding industrial environments. They are also vibration-resistant - this is ensured by the union nut with vibration protection.

Our connectors are resistant to oils and cooling lubricants, but resistance to aggressive media should be tested for each specific application. Different cable lengths available on request

If you are missing technical information? Please feel free to use our dictionary to find more technical details.

Product details:

Male straight - female 90°

M8 - M8, 3-pole

Art-No. 7005 - M8 Lite - (plastic hexagonal screw) on request

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product


Illustration




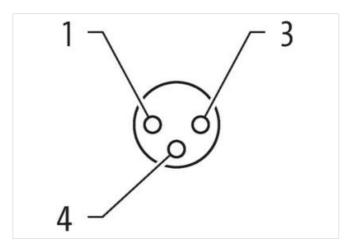






stay connected

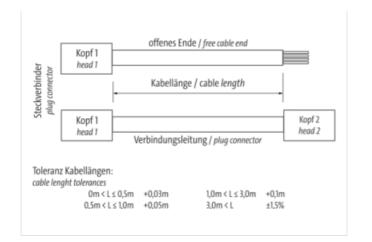

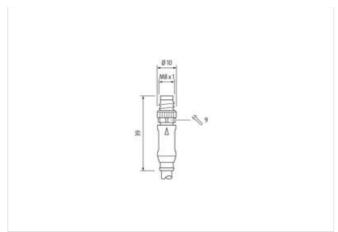

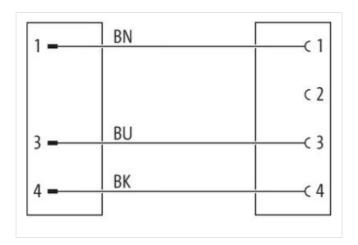

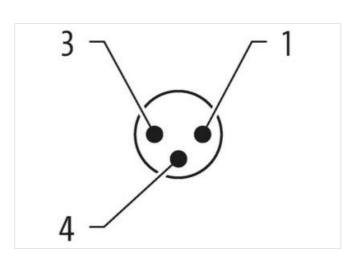

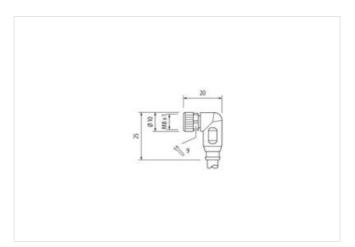

Product may differ from Image











Cable length

10 m

Side 1

Tightening torque

0,4 Nm



| Manustina weath ad | inserted assessed |
|---|--|
| Mounting method | inserted, screwed |
| Coating contact | gold plated |
| Family construction form | M8 |
| Thread | M8 x 1 |
| suitable for corrugated tube (internal Ø) | 6,5 mm |
| Gender | male |
| Cable outlet | straight |
| Coding | A |
| Material contact | Copper alloy |
| Material | PUR |
| No. of poles | 3 |
| Width across flats | SW9 |
| Degree of protection (EN IEC 60529) | IP65, IP66K, IP67 |
| Side 2 | |
| Tightening torque | 0,4 Nm |
| Mounting method | inserted, screwed |
| Coating contact | gold plated |
| Family construction form | M8 |
| Thread | M8 x 1 |
| Gender | female |
| suitable for corrugated tube (internal Ø) | 6,5 mm |
| Cable outlet | angled |
| Coding | A |
| Material contact | Copper alloy |
| Material | PUR |
| No. of poles | 3 |
| | |
| Width across flats | SW9 |
| Width across flats Degree of protection (EN IEC 60529) | SW9 IP65, IP66K, IP67 |
| | |
| Degree of protection (EN IEC 60529) | |
| Degree of protection (EN IEC 60529) Commercial data | IP65, IP66K, IP67 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 | IP65, IP66K, IP67 27279218 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 ECLASS-6.1 | 27279218 27279218 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 | 1P65, IP66K, IP67 27279218 27279218 27279218 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 | 1P65, IP66K, IP67 27279218 27279218 27279218 27279218 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-9.0 | 1P65, IP66K, IP67 27279218 27279218 27279218 27279218 27279218 27279218 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-9.0 ECLASS-10.1 | 1P65, IP66K, IP67 27279218 27279218 27279218 27279218 27060311 27060311 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 | 27279218 27279218 27279218 27279218 27279218 27279218 27060311 27060311 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 ECLASS-12.0 | IP65, IP66K, IP67 27279218 27279218 27279218 27279218 27060311 27060311 27060311 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 ECLASS-11.0 ETIM-5.0 | IP65, IP66K, IP67 27279218 27279218 27279218 27279218 27060311 27060311 27060311 EC001855 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 ECLASS-11.1 ECLASS-12.0 ETIM-5.0 customs tariff number | IP65, IP66K, IP67 27279218 27279218 27279218 27279218 27060311 27060311 27060311 EC001855 85444290 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 ECLASS-11.1 ECLASS-12.0 ETIM-5.0 customs tariff number customs tariff number | IP65, IP66K, IP67 27279218 27279218 27279218 27279218 27060311 27060311 27060311 EC001855 85444290 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 ECLASS-11.1 ECLASS-12.0 ETIM-5.0 customs tariff number customs tariff number | IP65, IP66K, IP67 27279218 27279218 27279218 27279218 27060311 27060311 27060311 EC001855 85444290 4048879128933 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 ECLASS-12.0 ETIM-5.0 customs tariff number customs tariff number EAN | IP65, IP66K, IP67 27279218 27279218 27279218 27279218 27060311 27060311 27060311 EC001855 85444290 4048879128933 4048879128933 |
| Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 ECLASS-11.1 ECLASS-12.0 ETIM-5.0 customs tariff number customs tariff number EAN EAN Packaging unit | IP65, IP66K, IP67 27279218 27279218 27279218 27060311 27060311 27060311 EC001855 85444290 4048879128933 4048879128933 |
| Degree of protection (EN IEC 60529) Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 ECLASS-11.1 ECLASS-12.0 ETIM-5.0 customs tariff number customs tariff number EAN EAN Packaging unit Packaging unit | IP65, IP66K, IP67 27279218 27279218 27279218 27060311 27060311 27060311 EC001855 85444290 4048879128933 4048879128933 |
| Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 ECLASS-12.0 ETIM-5.0 customs tariff number customs tariff number EAN EAN Packaging unit Packaging unit Electrical data Supply | IP65, IP66K, IP67 27279218 27279218 27279218 27060311 27060311 27060311 27060311 EC001855 85444290 4048879128933 4048879128933 1 |
| Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 ECLASS-12.0 ETIM-5.0 customs tariff number customs tariff number EAN EAN Packaging unit Packaging unit Electrical data Supply Operating voltage AC max. | IP65, IP66K, IP67 27279218 27279218 27279218 27060311 27060311 27060311 EC001855 85444290 4048879128933 4048879128933 1 1 |
| Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 ECLASS-12.0 ETIM-5.0 customs tariff number customs tariff number EAN EAN Packaging unit Packaging unit Packaging unit Electrical data Supply Operating voltage AC max. Operating voltage DC max. Current operating per contact max. | IP65, IP66K, IP67 27279218 27279218 27279218 27060311 27060311 27060311 EC001855 85444290 4048879128933 4048879128933 1 1 50 V 60 V |
| Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 ECLASS-11.1 ECLASS-12.0 ETIM-5.0 customs tariff number customs tariff number EAN EAN Packaging unit Packaging unit Electrical data Supply Operating voltage AC max. Operating voltage DC max. | IP65, IP66K, IP67 27279218 27279218 27279218 27060311 27060311 27060311 EC001855 85444290 4048879128933 4048879128933 1 1 50 V 60 V |
| Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-8.0 ECLASS-10.1 ECLASS-11.1 ECLASS-11.1 ECLASS-12.0 ETIM-5.0 customs tariff number customs tariff number EAN EAN Packaging unit Packaging unit Packaging unit Packaging voltage AC max. Operating voltage DC max. Current operating per contact max. Diagnostics Status indication LED | IP65, IP66K, IP67 27279218 27279218 27279218 27279218 27060311 27060311 27060311 EC001855 85444290 85444290 4048879128933 4048879128933 1 1 50 V 60 V 4 A |
| Commercial data ECLASS-6.0 ECLASS-6.1 ECLASS-7.0 ECLASS-9.0 ECLASS-10.1 ECLASS-11.1 ECLASS-11.1 ECLASS-12.0 ETIM-5.0 customs tariff number customs tariff number EAN EAN Packaging unit Packaging unit Electrical data Supply Operating voltage AC max. Current operating per contact max. Diagnostics | IP65, IP66K, IP67 27279218 27279218 27279218 27279218 27060311 27060311 27060311 EC001855 85444290 85444290 4048879128933 4048879128933 1 1 50 V 60 V 4 A |



stay connected

| Additional condition protection degree | inserted coround |
|--|--|
| Additional condition protection degree Pollution Degree | inserted, screwed 3 |
| Rated surge voltage | 1.5 kV |
| Material group (IEC 60664-1) | 1,5 KV |
| | ' |
| Mechanical data Material data | |
| Material housing | PUR |
| Coating locking | Nickeled |
| Material gasket | FKM |
| Locking material | Zinc die-casting |
| Mechanical data Mounting data | |
| Mounting method | inserted, screwed, Shaking protection |
| Environmental characteristics Climatic | |
| Operating temperature min. | -30 °C |
| Operating temperature max. | 85 °C |
| Additional condition temperature range | depending on cable quality |
| Important installation notes | |
| • | Posterithe consistent to a Male and a second |
| Note on strain relief | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. |
| Note on bending radius | Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |
| Conformity | |
| Product standard | DIN EN 61076-2-114 (M8) |
| Installation Cable | |
| wire arrangement | brown, black, blue |
| Cable identification | 230 |
| Cable Type | 3 |
| Jacket Color | gray |
| Type of Certificate | cURus |
| Amount stranding | 1 |
| Stranding | 3 wires twisted |
| wire arrangement | brown, black, blue |
| Cable weigth | 26,4 g/m |
| Material jacket | PUR |
| Shore hardness jacket | 90 ± 5 Shore A |
| Freedom from ingredients (jacket) | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Outer-diameter (jacket) | 4,1 mm |
| Tolerance outer diameter (sheath) | ± 5 % |
| Material wire insulation | PP |
| Amount wires | 3 |
| Outer diameter insulation | 1,25 mm |
| Outer diameter tolerance core insulation | ± 5 % |
| Shore hardness wire insulation | 70 ± 5 Shore D |
| Ingredient freeness wire insulation | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Amount strands (wire) | 32 |
| Diameter of single wires | 0,1 mm |
| Conductor crosssection (wire) | 0,25 mm ² |
| Material conductor wire | Stranded copper wire, bare |
| Conductor type (wire) | strand class 6 |
| Nominal voltage AC max. | 300 V |
| Current load capacity (standard) | to DIN VDE 0298-4 |
| Current load capacity min. wire | 4,5 A |
| Electrical resistance line constant wire | 79 Ω/km @ 20 °C |
| AC withstand voltage (wire - wire) | 2,5 kV @ 60 s |
| <u> </u> | 1 12 |



| Power frequency withstand voltage (wire - jacket) | 2,5 kV @ 60 s |
|---|--|
| Min. operating temperature (static) | -40 °C |
| Max. operating temperature (fixed) | 80 °C / 90 °C @ 10000 h Operation |
| Operating temperature min. (dynamic) | -25 °C |
| Operating temperature max. (dynamic) | 80 °C / 90 °C @ 10000 h Operation |
| Flame resistance | IEC 60332-2-2 UL 1581 § 1090 UL 1581 § 1100 FT2 |
| chemical resistance | Good, application-related testing |
| Gasoline resistance | Good, application-related testing |
| Oil resistance | Good, application-related testing DIN EN 60811-404 |
| Bending radius (fixed) | 5 x Outer diameter |
| Bending radius (dynamic) | 10 x Outer diameter |
| No. of bending cycles (C-track) | 10 Mio. @ 25 °C |
| Traversing distance (C-track) | 10 m @ 25 °C horizontal |
| Travel speed (C-track) | 3 m/s @ 25 °C |
| No. of torsion cycles | 2 Mio. |
| Torsion stress | ± 180 °/m |
| Torsion speed | 35 cycles/min |