

M12 male 0° / M12 female 0° A-cod.

TPE 4x18/19AWG ye UL/CSA. ITC/PLTC 2m

Art.No.: 7700-40021-1500200

Weight: 0.185 Country of origin: US

Model designation: MSBL0-A-T150_2.0

Advantages of our connectors:

Our connectors are versatile and specially optimised for industrial environments. All connectors are 100% tested during the manufacturing process to ensure the highest quality and reliability.

The contacts are gold-plated, which ensures optimum conductivity. Thanks to the high degree of protection, the connectors are ideal for demanding industrial environments. They are also vibration-resistant - this is ensured by the union nut with vibration protection.

Our connectors are resistant to oils and cooling lubricants, but resistance to aggressive media should be tested for each specific application. Different cable lengths available on request

If you are missing technical information? Please feel free to use our dictionary to find more technical details.

Product details:

Cable is approved for 600 V Male straight – female straight M12 – M12, 4-pole USA

Cable is approved for 600 V


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request. Further cable lengths on request.

Link to Product

Illustration




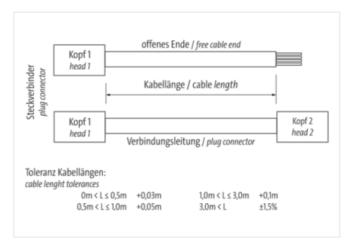






stay connected



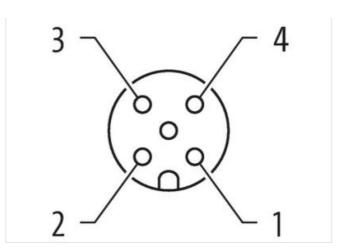

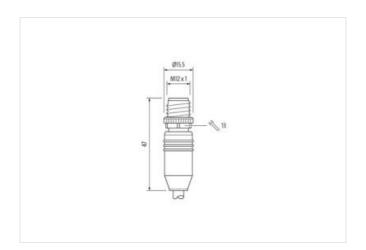

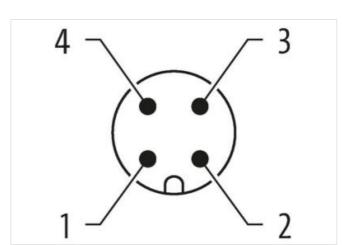

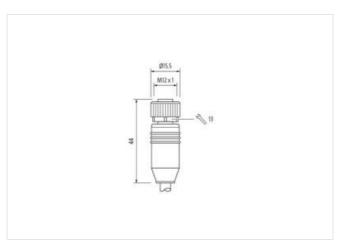

Product may differ from Image











Cable length

2 m

Side 1

Tightening torque 0,6 Nm



stay connected

Family construction form M12 n Thread M12 n Gender male Galde contel carright Counting A No. of poles 4 With across files Side 2 Tighteening torque 0.6 Nm Mounting method Family construction form M12 n Thread M12 n Thread M12 n Thread M12 n Thread Gender Family construction form M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread Conding A No. of poles 4 With a M12 n Thread M12 n Th	Mounting method	inserted, screwed
Throad	·	
Gender mele Cable outlet straight Coding A No. of poles 4 Wich across fists Side 2 Tightening torque O.6 Nm Moutring method nearend, srewed Family construction from M12 Timead M12 x 1 Gender lender lender Gable outlet Cable o		
Cable outlet straight Coding A No. ol poles 4 Wich arose fate SW13 Side 2 T Trightening torque 0.8 Nm Mounting method inserted, screwed Family construction from M12 Thread M12 x 1 Gender formate Cable outlet straight Coding A No. of poles 4 Width arose flats SW13 ECLASS-6.0 27279218 ECLASS-7.0 27279218 ECLASS-8.0.1 27279218 ECLASS-9.0 27608311 ECLASS-9.1 27608311 ECLASS-1.1 27608311 ECLASS-1.2 27608311 ECLASS-1.2 27608311 ECLASS-1.2 27608311 ECLASS-1.2 27608311 ECLASS-1.3 27608311 ECLASS-1.0 25001855 ETM-6.0 EC001855 ETM-7.0 EC001855 <td< td=""><td></td><td></td></td<>		
Coding A No. of poles 4 Wich across fetas SWI3 Side 2		
No. of poles Width across fields SW13 Tightening torque 0,6 Nm Mounting mathod inserted, screwed Family constitution form M12 Throad M12 x 1 Gender Cable outlet Straight Coding A No. of poles 4 Width across fields SW13 Commercial date ECLASS-6,0 27279218 ECLASS-6,1 27279218 ECLASS-6,1 27279218 ECLASS-8,1 ECLASS-8,0 27279218 ECLASS-8,0 27279218 ECLASS-8,0 ECLASS-1,1 ECLASS-1,1 ECLASS-1,1 ECLASS-1,1 ECLASS-1,1 ECLASS-1,0 ECL		
Width across filters SW13 Side 2 Tythering torque 0.6 Nm Mounting method inserted, screwed Family construction form M12 Gender female Garder (supplied of the straight) control Coding A No. of poles 4 With across filts SW13 Commercial date ECLASS-8.0 22779218 ECLASS-8.0 2779218 ECLASS-7.0 2779218 ECLASS-9.0 2779218 ECLASS-9.1 27000311 ECLASS-1.1 27000311 ECLASS-1.2 27000311		
Side 2 Tightening torque 0.6 Nm Mounting method inserted, screwed Family construction form MT2 Thread MEX.1 Gender female Cable outlet straight Coding A No. of poles 4 Width across flats SW13 Commercial date ECLASS-6.0 27279218 ECLASS-8.1 27279218 ECLASS-8.1 27279218 ECLASS-9.0 27279218 ECLASS-9.1 27060311 ECLASS-9.0 27060311 ECLASS-9.1.1 27060311 ECLASS-1.2.2 27060311 ECLASS-1.3 27060311 ECLASS-1.4 27060311 ECLASS-1.5 27060311 ECLASS-1.6 ECO01855 ETIM-6.0 ECO01855 ETIM-7.0 ECO01855 ETIM-8.0 ECO01855 ETIM-8.0 ECO01855 ETIM-8.0 ECO01855 ETIM-8.0 ECO01855 <td></td> <td></td>		
Tightening torque 0.6 Nm Mounting method inserted, screwed Family construction form M12 Thread M12 x 1 Gender Ionnate Cable outlet salight Coding A No. of potes 4 With across flats SW13 Commercial data ECLASS-6.0 27279218 ECLASS-7.0 27279218 ECLASS-7.0 27279218 ECLASS-7.0 27279218 ECLASS-8.0 27060311 ECLASS-9.0 27060311 ECLASS-9.0 27060311 ECLASS-1.1 20060311 ECLASS-1.2.0 27060311 ECLASS-1.2.0 27060311 ECLASS-1.2.0 ECO01855 ETIM-8.0 ECO01855 ETIM-8.0 ECO01855 ETIM-8.0 ECO01855 ETIM-8.0 ECO01855 ETIM-8.0 <td></td> <td>5W13</td>		5W13
Mounting method inserted, screwed Family construction form M12 Thread M12 x 1 Gandar Inmale Cable outlet straight Coding A No. of poles 4 Width across fats SW13 Commercial data EGLASS-6.0 27279218 EGLASS-7.0 27279218 2 EGLASS-7.0 27279218 2 <td></td> <td></td>		
Family construction form M12 x 1 Gender (male (m		· · · · · · · · · · · · · · · · · · ·
Thread		
Gender female Cable outlet straight Coding A No. of poles 4 Width across flats SW13 Commercial date ECLASS-6.0 ECLASS-6.1 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-9.1 27060311 ECLASS-1.1 27060311 ECLASS-1.2.0 27060311 ECLASS-1.0 27060311 ECLASS-1.0 27060311 ECLASS-1.0 EC001855 ETIM-8.0 EC001855 ETIM-9.0 EC001855 ETIM-9.0 EC001855 ETIM-9.0 EC001855 ETIM-9.0 EC001855 ETIM-9.0 EC01855 ETIM-9.0 EC01855 ETIM-9.0 EC01855 ETIM-9.0 EC01855 ETIM-9.0 EC01855		
Cable outlet straight Coding A No. of poles 4 Width across flats SW13 Commercial data ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-9.0 2760311 ECLASS-9.0 2760311 ECLASS-10.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27606311 ECLASS-11.1 27060311 ECLASS-12.0 27606311 ETIM-5.0 EC001855 ETIM-6.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 ETIM-8.0 EC001855 ETIM-9.0		
Coding A No. of poles 4 Word poles 4 Width across fats SW13 Commercial data ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060311 ECLASS-9.1 27060311 ECLASS-10.1 27060311 ECLASS-12.0 27060311 ECLASS-12.0 27060311 ECLASS-12.0 27060311 ECLASS-12.0 EC001855 ETIM-5.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 ETIM-8.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 customs tariff number 8544290 EAN 4048879518277 Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage AC (UL-listed) 30 V <td></td> <td></td>		
No. of poles 4 Width across flats SW13 Commercial data ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-7.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060311 ECLASS-9.0 27060311 ECLASS-1.1 27060311 ECLASS-1.0 2706031 ECLAS-1.0 2706031 ECLASS-1.0 2706031 ECLAS-1.0 2706031 ECLAS-1.0 2706031 ECLAS-1.0		
Width across flats SW13 Commercial data ECLASS-6.0 27279218 ECLASS-7.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060311 ECLASS-9.0 27060311 ECLASS-10.1 27060311 ECLASS-11.1 27060311 ETIM-5.0 EC001855 ETIM-6.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 ETIM-8.0 EC001855 ETIM-8.0 EC001855 ETIM-8.0 EC001855 ETIM-8.0 EC001855 ETIM-9.0 EC0018		
Commercial data ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-9.0 27279218 ECLASS-9.0 27060311 ECLASS-10.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311 ECLASS-12.0 ECO01855 ETIM-5.0 ECO01855 ETIM-6.0 ECO01855 ETIM-7.0 ECO01855 ETIM-8.0 ECO01855 ETIM-8.0 ECO01855 ETIM-9.0 ECO01865 ETIM-9.0	No. of poles	
ECLASS-6.0 27279218 ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-9.0 27279218 ECLASS-9.0 27269311 ECLASS-9.0 27060311 ECLASS-10.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311 ETIM-5.0 EC001855 ETIM-6.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 ETIM-9.0	Width across flats	SW13
ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060311 ECLASS-10.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311 ETIM-5.0 EC001855 ETIM-6.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879518277 EAN 4048879518277 EAN 4048879518277 Packaging unit 1 Packaging unit 1 Flectrical data Supply Operating voltage AC max. 250 V Operating voltage AC max. 250 V Operating voltage AC (U-Listed) 30 V Current operating per contact max. 4 A Device protection Electrical 1 Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional con	Commercial data	
ECLASS-6.1 27279218 ECLASS-7.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060311 ECLASS-10.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311 ETIM-5.0 EC001855 ETIM-6.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879518277 EAN 4048879518277 EAN 4048879518277 Packaging unit 1 Packaging unit 1 Flectrical data Supply Operating voltage AC max. 250 V Operating voltage AC max. 250 V Operating voltage AC (U-Listed) 30 V Current operating per contact max. 4 A Device protection Electrical 1 Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional con	ECLASS-6.0	27279218
ECLASS-7.0 27279218 ECLASS-8.0 27279218 ECLASS-9.0 27060311 ECLASS-10.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311 ETIM-5.0 EC001855 ETIM-6.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 ETIM-8.0 EC001855 ETIM-8.0 EC001855 EAN 4048879518277 EAN 4048879518277 EAN 4048879518277 Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage AC max. 250 V Operating voltage DC ('U-listed') 30 V Operating voltage DC ('U-listed) 30 V Operating optage protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) 1 <td< td=""><td>ECLASS-6.1</td><td></td></td<>	ECLASS-6.1	
ECLASS-8.0 27279218 ECLASS-9.0 27060311 ECLASS-10.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311 ETIM-5.0 EC001855 ETIM-7.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879518277 Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage AC max. 250 V Operating voltage AC (UL-listed) 30 V Operating voltage AC (UL-listed) 30 V Operating voltage DC (UL-listed) 30 V Operating voltage pc contact max. 4 A Device protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2.5 kV Material group (IEC 60664-1) <td></td> <td></td>		
ECLASS-9.0 27060311 ECLASS-10.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311 ETIM-5.0 ECO01855 ETIM-6.0 EC001855 ETIM-6.0 EC001855 ETIM-7.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 ETIM-8.0 EC001855 ECUSS-11.1 EVENT EV		
ECLASS-10.1 27060311 ECLASS-11.1 27060311 ECLASS-12.0 27060311 ETIM-5.0 EC001855 ETIM-6.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 ETIM-8.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879518277 EAN 4048879518277 Packaging unit 1 Packaging voltage AC max. 250 V Operating voltage AC max. 250 V Operating voltage AC (UL-listed) 30 V Operating voltage DC (UL-listed) 30 V Current operating per contact max. 4 A Degree of protection (Electrical) Degree of protection [Electrical) 1 mserled, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) 1 Mechanical data without		
ECLASS-11.1 27060311 ECLASS-12.0 27060311 ETIM-5.0 EC001855 ETIM-6.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879518277 EAN 4048879518277 Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage AC max. 250 V Operating voltage AC (UL-listed) 30 V Operating voltage DC (UL-listed) 30 V Operating per contact max. 4 A Device protection Electrical Begree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2.5 kV Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without		
ECLASS-12.0 27060311 ETIM-5.0 EC001855 ETIM-6.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879518277 EAN 4048879518277 Packaging unit 1 Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage AC (Ulisted) 30 V Operating voltage AC (Ulisted) 30 V Operating voltage AC (Ulisted) 30 V Operating voltage PC (Ulisted) 30 V Operating voltage PC (Ulisted) 30 V Operating voltage PC (Ulisted) 30 V Degree of protection Electrical Degree of protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1)		
ETIM-5.0 EC001855 ETIM-6.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879518277 EAN 4048879518277 EAN 4048879518277 EAN 4048879518277 EAN 1 1 Packaging unit 1 Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage AC (UL-listed) 30 V Operating voltage AC (UL-listed) 30 V Operating voltage AC (UL-listed) 30 V Operating voltage DC max. 4 A Device protection Electrical Degree of protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without		
ETIM-6.0 EC001855 ETIM-7.0 EC001855 ETIM-7.0 EC001855 ETIM-8.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879518277 EAN 4048879518277 Packaging unit 1 Packaging voltage AC max. 250 V Operating voltage AC max. 250 V Operating voltage DC (UL-listed) 30 V Current operating per contact max. 4 A Pevice protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Poilution Degree 3 Rated surge voltage C (UE 60664-1) I Mechanical data Contour for corrugated hose without		
ETIM-7.0 EC001855 ETIM-8.0 EC001855 customs tariff number 85444290 customs tariff number 85444290 EAN 4048879518277 EAN 4048879518277 Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage DC max. 250 V Operating voltage AC (UL-listed) 30 V Ourrent operating per contact max. 4 A Device protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without		
ETIM-8.0 EC001855 customs tariff number 85444290 EAN 4048879518277 EAN 4048879518277 Packaging unit 1 Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage DC max. 250 V Operating voltage AC (UL-listed) 30 V Operating voltage DC (UL-listed) 30 V Current operating per contact max. 4 A Degree of protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data Without		
customs tariff number 85444290 EAN 4048879518277 EAN 4048879518277 Packaging unit 1 Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage DC max. 250 V Operating voltage AC (UL-listed) 30 V Operating voltage DC (UL-listed) 30 V Current operating per contact max. 4 A Degree of protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data without		
customs tariff number 85444290 EAN 4048879518277 Packaging unit 1 Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage DC max. 250 V Operating voltage AC (UL-listed) 30 V Operating voltage DC (UL-listed) 30 V Current operating per contact max. 4 A Degree of protection Electrical Degree of protection EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data Without		
EAN 4048879518277 EAN 4048879518277 Packaging unit 1 Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage DC max. 250 V Operating voltage AC (UL-listed) 30 V Operating voltage DC (UL-listed) 30 V Current operating per contact max. 4 A Degree of protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without		
EAN 4048879518277 Packaging unit 1 Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage DC max. 250 V Operating voltage AC (UL-listed) 30 V Operating voltage DC (UL-listed) 30 V Current operating per contact max. 4 A Device protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage AC (BC 60664-1) I Mechanical data Contour for corrugated hose without		
Packaging unit 1 Packaging unit 1 Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage DC max. 250 V Operating voltage AC (UL-listed) 30 V Operating voltage DC (UL-listed) 30 V Current operating per contact max. 4 A Device protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage AC (BC 60664-1) I I I I I I I I I I I I I I I I I I I		
Packaging unit 1 Electrical data Supply Operating voltage AC max. 250 V Operating voltage DC max. 250 V Operating voltage AC (UL-listed) 30 V Operating voltage DC (UL-listed) 30 V Current operating per contact max. 4 A Device protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage AC (UL-listed) I Mechanical data Contour for corrugated hose without		
Electrical data Supply Operating voltage AC max. 250 V Operating voltage DC max. 250 V Operating voltage AC (UL-listed) 30 V Operating voltage DC (UL-listed) 30 V Current operating per contact max. 4 A Device protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without		
Operating voltage AC max. 250 V Operating voltage DC max. 250 V Operating voltage AC (UL-listed) 30 V Operating voltage DC (UL-listed) 30 V Current operating per contact max. 4 A Device protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without		
Operating voltage DC max. Operating voltage AC (UL-listed) Operating voltage DC (UL-listed) Operating voltage DC (UL-listed) Ourrent operating per contact max. 4 A Device protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without		
Operating voltage AC (UL-listed) 30 V Operating voltage DC (UL-listed) 30 V Current operating per contact max. 4 A Device protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without		
Operating voltage DC (UL-listed) 30 V Current operating per contact max. 4 A Device protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without		
Current operating per contact max. 4 A Device protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without		
Device protection Electrical Degree of protection (EN IEC 60529) IP65, IP67, IP66K Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without		
Degree of protection (EN IEC 60529) Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) Mechanical data Contour for corrugated hose without	Current operating per contact max.	4 A
Additional condition protection degree inserted, screwed Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without	Device protection Electrical	
Pollution Degree 3 Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without	Degree of protection (EN IEC 60529)	IP65, IP67, IP66K
Rated surge voltage 2,5 kV Material group (IEC 60664-1) I Mechanical data Contour for corrugated hose without	Additional condition protection degree	inserted, screwed
Material group (IEC 60664-1) Mechanical data Contour for corrugated hose without	Pollution Degree	
Mechanical data Contour for corrugated hose without	Rated surge voltage	2,5 kV
Contour for corrugated hose without	Material group (IEC 60664-1)	I
•	Mechanical data	
Mechanical data Material data	Contour for corrugated hose	without
	Mechanical data Material data	



stay connected

Color housing	black
Coating locking	Nickeled
Color contact carrier	green
ocking material	Zinc die-casting
Mechanical data Mounting data	
•	inserted serowed Shaking protection
Mounting method	inserted, screwed, Shaking protection
Environmental characteristics Climatic	
Operating temperature min.	-30 °C
Operating temperature max.	85 °C
Additional condition temperature range	depending on cable quality
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Conformity	
Product standard	DIN EN 61076-2-101 (M12)
	SITE OF ONE OF (WILL)
Installation Cable	
wire arrangement	brown, black, blue, white
Cable identification	150
Jacket Color	yellow
Amount stranding	1
Stranding	4 wires twisted
vire arrangement	brown, black, blue, white
Cable weigth	92,4 g/m
Material jacket	TPE
Freedom from ingredients (jacket)	lead-free, CFC-free, halogen-free
Outer-diameter (jacket)	7,21 mm
Tolerance outer diameter (sheath)	± 5 %
Material wire insulation	PVC
Amount wires	4
Outer diameter insulation	1,93 mm
Outer diameter tolerance core insulation	± 5 %
Ingredient freeness wire insulation	lead-free, CFC-free
Amount strands (wire)	19
Diameter of single wires	18 AWG
Conductor crosssection (wire)	18 AWG
Material conductor wire	Stranded copper wire, bare
Nominal voltage AC max.	600 V
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity min. wire	9,6 A
Electrical resistance line constant wire	22,5 Ω/km @ 20 °C
AC withstand voltage (wire - wire)	4 kV @ 60 s
Power frequency withstand voltage (wire - acket)	4 kV @ 60 s
Min. operating temperature (static)	-40 °C
Max. operating temperature (fixed)	105 °C
Operating temperature min. (dynamic)	-20 °C
Operating temperature max. (dynamic)	90 °C
Flame resistance	IEC 60332-2-2 UL 1581 § 1090 UL 1581 § 1100 FT2
chemical resistance	Good, application-related testing
Gasoline resistance	Good, application-related testing
Oil resistance	Good, application-related testing DIN EN 60811-404



Bending radius (fixed)	10 x Outer diameter
Bending radius (dynamic)	15 x Outer diameter
No. of bending cycles (C-track)	10 Mio.
No. of torsion cycles	3 Mio.
Torsion stress	± 180 °/m