

EXACT8, 4XM8, 4 POLE

Conn.M12 12 pole

Art.No.: 8000-84160-0000000

Weight: 0.101

Country of origin: DE

Model designation: MVP8N-GS4V

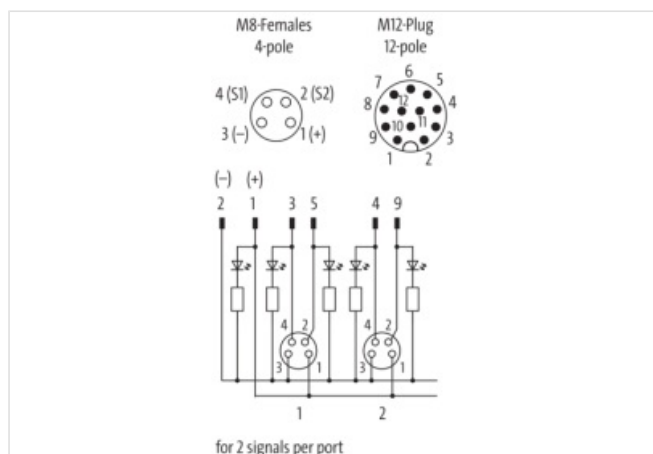
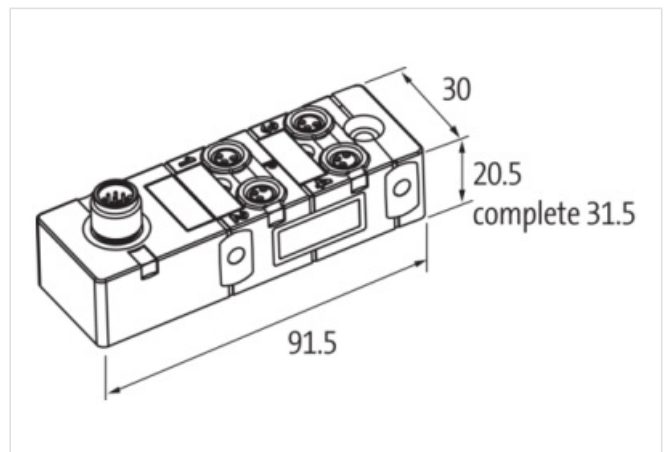
4-way, 4-pole

M12 (12-pole)

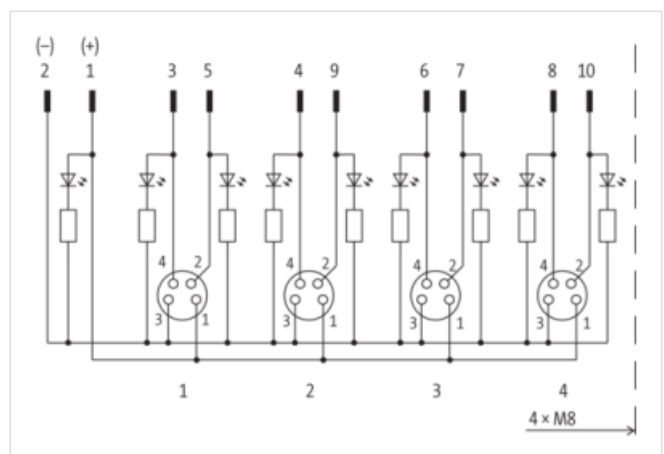
Inline face or side mounting

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product**Illustration**

Product may differ from Image

**Commercial data**

URL Webshop

<https://shop.murrelektronik.com/8000-84160-0000000>

GTIN

4048879056090

ECLASS-6.0	27279219
ECLASS-6.1	27279219
ECLASS-7.0	27279219
ECLASS-7.1	27279219
ECLASS-8.0	27279219
ECLASS-8.1	27279219
ECLASS-9.0	27440111
ECLASS-10.0.1	27440111
ECLASS-10.1	27440111
ECLASS-11.0	27440111
ECLASS-11.1	27440111
ECLASS-12.0	27440111
ECLASS-13.0	27440111
ECLASS-14.0	27440111
ETIM-5.0	EC002585
ETIM-6.0	EC002585
ETIM-7.0	EC002585
ETIM-8.0	EC002585
EAN	4048879056090

Electrical data | Supply

Operating voltage DC	24 V
Current operating per contact max.	1.5 A

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	mounted, screwed

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Material housing	Plastic
------------------	---------

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	70 °C
Additional condition temperature range	depending on cable quality

Connection type 1

Family construction form	M12
No. of poles	12
Coding	A
Gender	male
Color contact carrier	black
PIN 1	BN
PIN 2	BU
PIN 3	WH
PIN 4	GN
PIN 5	PK
PIN 6	YE
PIN 7	BK
PIN 8	GY
PIN 9	RD
PIN 10	VT
PIN 11	GY / PK
PIN 12	RD / BU