

EXACT12, 8XM12, 4 POLE BASIC HOUSING

Without homerun-cable

Art.No.: 8000-88400-0000000

Weight: 0.120 kg Country of origin: DE

Model designation: MVP12N-MN8V

8-way, 4-pole Form PNP

Screw plug-in terminals


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration






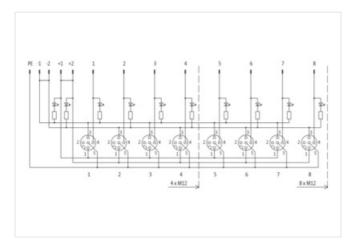


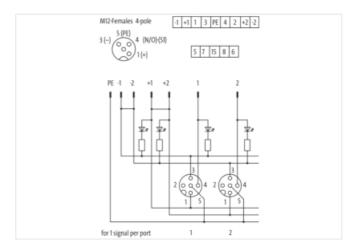



stay connected

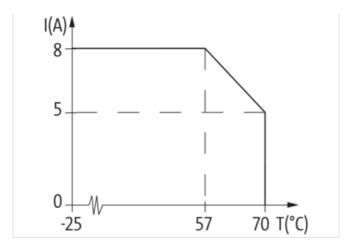

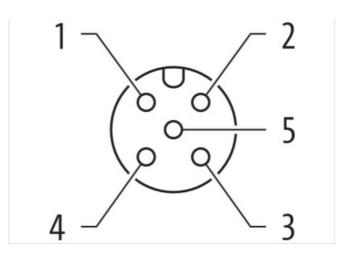

Product may differ from Image



Header







neauei				
Material short text	MVP12N-MN8V			
Commercial data				
URL Webshop	https://shop.murrelektronik.com/8000-88400-0000000			
GTIN	4048879054300			
ECLASS-6.0	27143423			
ECLASS-6.1	27279219			
ECLASS-7.0	27279219			
ECLASS-7.1	27279219			
ECLASS-8.0	27279219			
ECLASS-8.1	27279219			
ECLASS-9.0	27440111			
ECLASS-10.0.1	27440111			
ECLASS-10.1	27440111			
ECLASS-11.0	27440111			
ECLASS-11.1	27440111			
ECLASS-12.0	27440111			
ECLASS-13.0	27440111			
ECLASS-14.0	27440111			
ETIM-5.0	EC002585			
ETIM-6.0	EC002585			
ETIM-7.0	EC002585			
ETIM-8.0	EC002585			
customs tariff number	85366990			
EAN	4048879054300			
Packaging unit	1			
Electrical data Supply				
Operating voltage DC	24 V			
Current operating per contact max.	4 A			
Total current max.	8 A			
Device protection Electrical				
Degree of protection (EN IEC 60529)	IP67, IP65			

PIN 5



Device protection Media			
Flame resistance	flame retardant		
Mechanical data Material data			
Material housing	Plastic		
Environmental characteristics Clima	atic		
Operating temperature min.	-20 °C		
Operating temperature max.	70 °C		
Connection type 2			
Family construction form	Сар		
No. of poles	14	-	-
Family construction form	M12		
No. of poles	4		
Coding	Α		
Gender	female		
Color contact carrier	black		
PIN 1	+		
PIN 2	n.c.		
PIN 3	-		
PIN 4	NO S 1		

PE