

EXACT12, 8XM12, 5-POLE, BASIC HOUSING, W.O. LED'S

Without homerun-cable

Art.No.: 8000-88502-0000000

Weight: 0.127

Country of origin: DE

Model designation: MVP12N-MK8F-XA

8-way, 5-pole

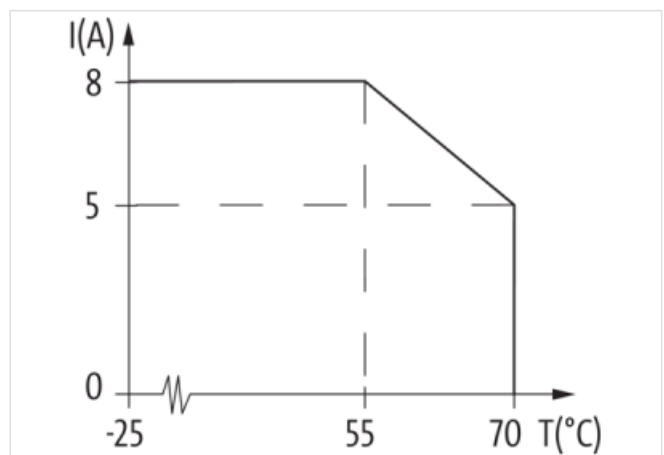
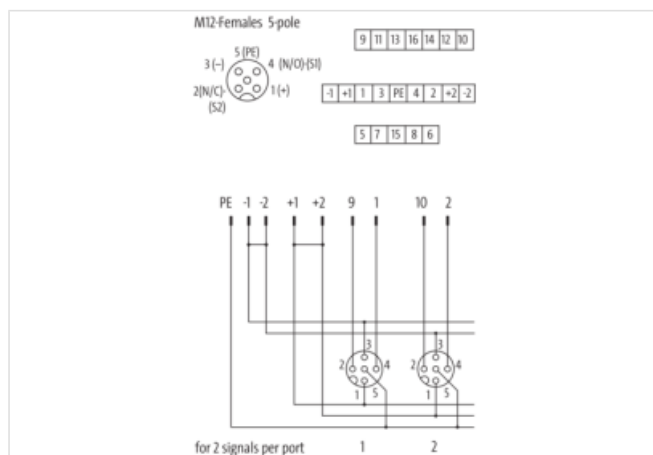
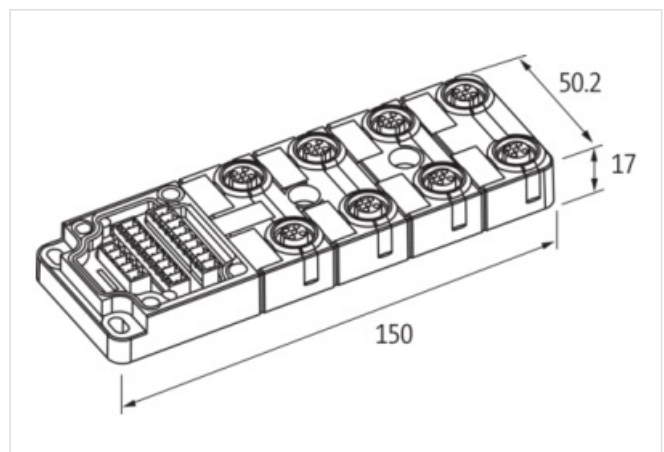
without LED, up to 125 V AC/DC

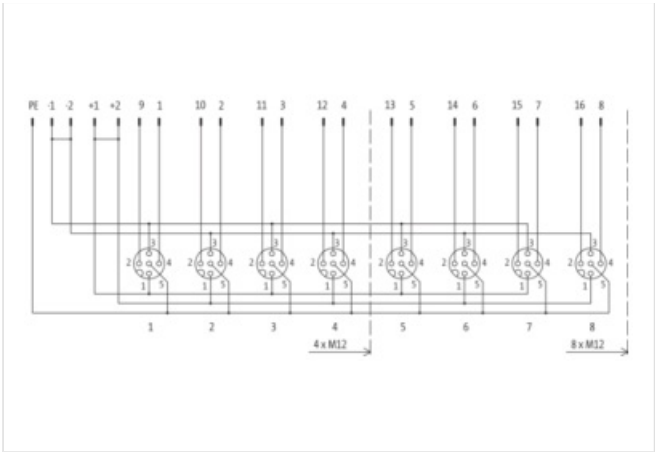
Screw plug-in terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

[Link to Product](#)**Illustration**



Product may differ from Image



| Commercial data | |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| URL Webshop | https://shop.murrelektronik.com/8000-88502-0000000 |
| GTIN | 4048879054041 |
| ECLASS-6.0 | 27143423 |
| ECLASS-6.1 | 27279219 |
| ECLASS-7.0 | 27279219 |
| ECLASS-7.1 | 27279219 |
| ECLASS-8.0 | 27279219 |
| ECLASS-8.1 | 27279219 |
| ECLASS-9.0 | 27440111 |
| ECLASS-10.0.1 | 27440111 |
| ECLASS-10.1 | 27440111 |
| ECLASS-11.0 | 27440111 |
| ECLASS-11.1 | 27440111 |
| ECLASS-12.0 | 27440111 |
| ECLASS-13.0 | 27440111 |
| ECLASS-14.0 | 27440111 |
| ETIM-5.0 | EC002585 |
| ETIM-6.0 | EC002585 |
| ETIM-7.0 | EC002585 |
| ETIM-8.0 | EC002585 |
| EAN | 4048879054041 |
| Electrical data Supply | |
| Operating voltage AC | 125 V |
| Operating voltage DC | 125 V |
| Current operating per contact max. | 4 A |
| Total current max. | 8 A |
| Device protection Electrical | |
| Degree of protection (EN IEC 60529) | IP67, IP65 |
| Device protection Media | |
| Flame resistance | flame retardant |
| Mechanical data Material data | |
| Material housing | Plastic |

Environmental characteristics | Climatic

| | |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 70 °C |