




EXACT12, 8XM12, 5-POLE, CAP, PLUG. SCREW-TERM.



Art.No.: 8000-88550-0000000
 Weight: 0.212 kg
 Country of origin: DE
 Model designation: MVP12N-FN8F

8-way, 5-pole
 Form PNP
 Screw plug-in terminals
 Plastic housings with good resistance against chemicals and oils.
 The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

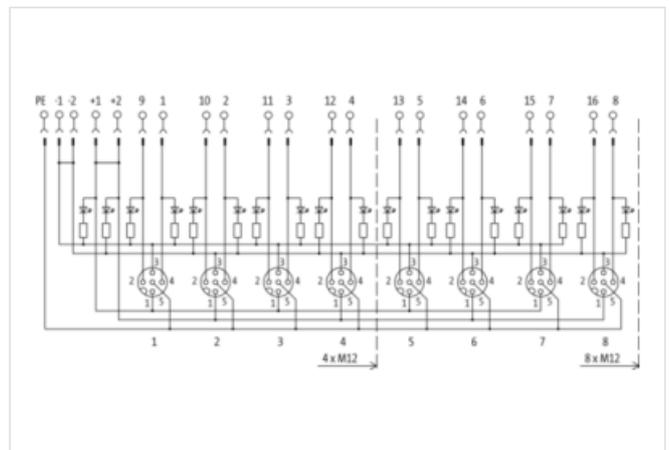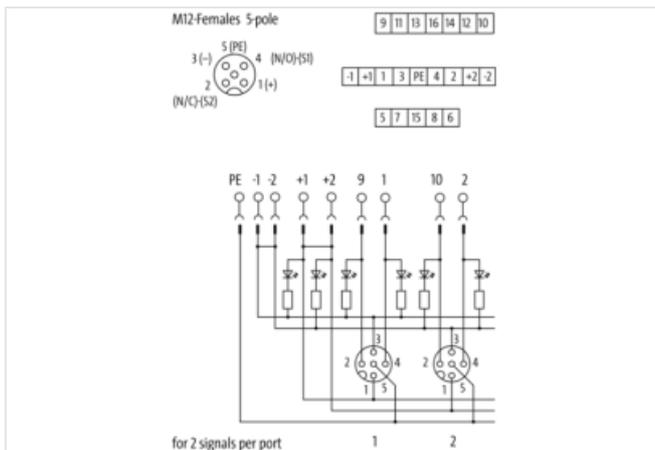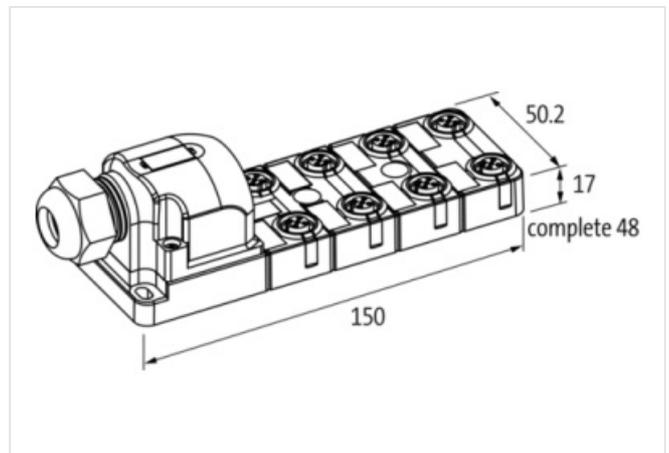

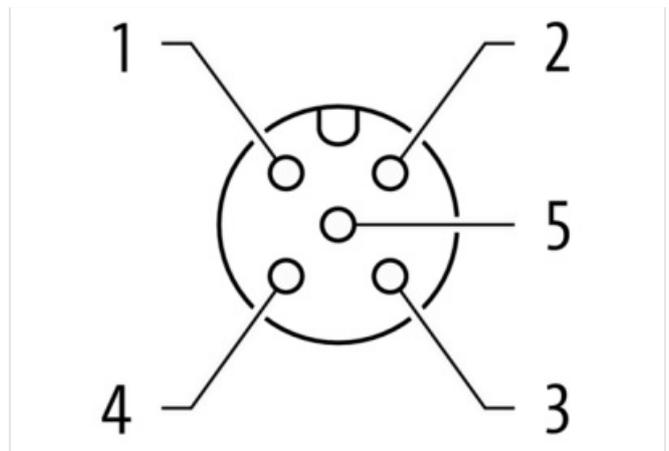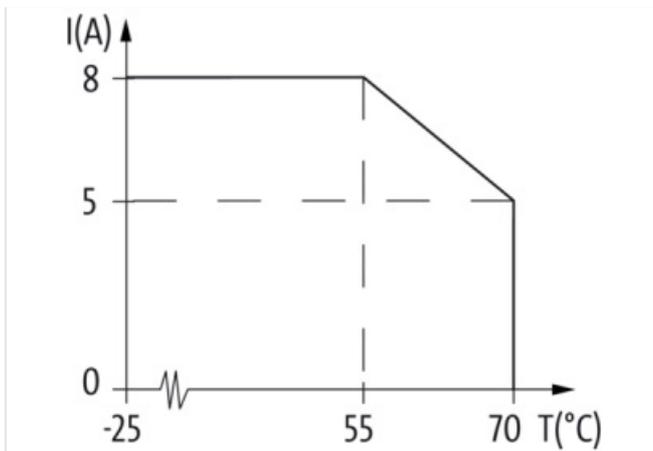

Product may differ from Image



Commercial data

URL Webshop	https://shop.murrelektronik.com/8000-88550-0000000
GTIN	4048879053846
Customs tariff number	85366990
ECLASS-6.0	27143423
ECLASS-6.1	27279219
ECLASS-7.0	27279219
ECLASS-7.1	27279219
ECLASS-8.0	27279219
ECLASS-8.1	27279219
ECLASS-9.0	27440111
ECLASS-10.0.1	27440111
ECLASS-10.1	27440111
ECLASS-11.0	27440111
ECLASS-11.1	27440111
ECLASS-12.0	27440111
ECLASS-13.0	27440111
ECLASS-14.0	27440111
ETIM-5.0	EC002585
ETIM-6.0	EC002585
ETIM-7.0	EC002585
ETIM-8.0	EC002585
customs tariff number	85366990
EAN	4048879053846
Packaging unit	1

Electrical data | Supply

Operating voltage DC	24 V
Current operating per contact max.	4 A
Total current max.	8 A

Installation

Connection cross section max.	1,5 mm ²
AWG number max.	16

Installation | Connection

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-04-21

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Connection Screw plug-in terminals

Device protection | Electrical

Degree of protection (EN IEC 60529) IP67, IP65

Device protection | Media

Flame resistance flame retardant

Mechanical data | Material data

housing Plastic

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 70 °C

Connection type 2

Family construction form Cap

No. of poles 21

Family construction form M12

No. of poles 5

Coding A

Gender female

Color contact carrier black

PIN 1 +

PIN 2 NC S 2

PIN 3 -

PIN 4 NO S 1

PIN 5 PE