

## MICO electronic circuit protection, 4 CHANNELS

IN: 24 V DC OUT: 24 V DC / 4-6-8-10 A

Art.No.: 9000-41034-0401000

Weight: 0.2

Country of origin: CZ


Model designation: MICO 4.10


MICO 4.10 4 channels


Current adjustment 4, 6, 8, 10 A

## **Link to Product**

## Illustration

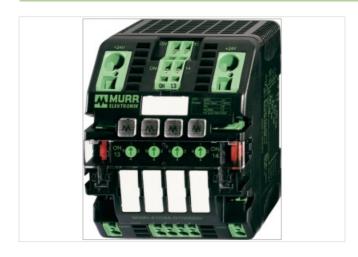

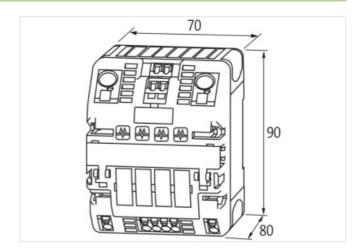

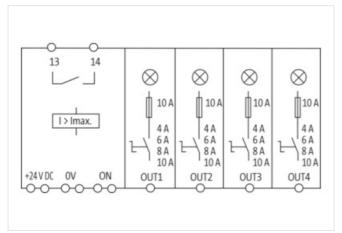

Product may differ from Image















Header

Material short text

Commercial data

**URL** Webshop

https://shop.murrelektronik.com/9000-41034-0401000

MICO 4.10



GTIN	4048879000062
ECLASS-6.0	27371802
ECLASS-6.1	27371802
ECLASS-7.0	27371802
ECLASS-7.1	27371802
ECLASS-8.0	27371802
ECLASS-8.1	27371802
ECLASS-9.0	27371802
ECLASS-9.1	27371802
ECLASS-10.0.1	27371802
ECLASS-10.1	27371802
ECLASS-11.0	27371802
ECLASS-11.1	27371802
ECLASS-12.0	27371802
ECLASS-13.0	27371802
ECLASS-14.0	27371802
ETIM-5.0	EC001440
ETIM-6.0	EC001440
ETIM-7.0	EC001440
ETIM-8.0	EC001440
customs tariff number	85363010
EAN	4048879000062
Packaging unit	1
Electrical data   Input	
Input voltage DC	24 V
Input voltage DC min.	18 V
Input voltage DC max.	30 V
Total current bridge set max.	40 A
ON input voltage control inputs min.	10 V
ON input voltage control inputs max.	30 V
ON pulse length control inputs high min.	20 ms
Electrical data   Output	
Switch-on capacity per channel max.	20 mF
Switching voltage AC max.	30 V
Switching voltage DC max.	30 V
Switching current max.	100 mA
Installation	
Connection cross-section inputs max.	16 mm²
Connection cross-section outputs max.	4 mm²
Connection cross-section control inputs / control outputs max.	2,5 mm²
Mechanical data   Mounting data	
Height	90 mm
Width	70 mm
Depth	80 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Environmental characteristics   Climatic	
Operating temperature min.	0 °C
Operating temperature max.	55 °C
Storage temperature min.	-40 °C
Storage temperature max.	80 °C

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-11-22



stay connected

Connection type 11	
Family construction form	Bridging Contact
No. of poles	1
Gender	female
Color contact carrier	Black
PIN 1	24 V DC
Family construction form	Bridging Contact
No. of poles	1
Gender	female
Color contact carrier	Black
PIN 1	0 V
Family construction form	Bridging Contact
No. of poles	2
Gender	female
Color contact carrier	Black
PIN 1	On
PIN 2	13
Family construction form	Bridging Contact
No. of poles	2
Gender	female
Color contact carrier	Black
PIN 1	On
PIN 2	14
Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	24 V DC
Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	0 V
Family construction form	terminal
No. of poles	2
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	Out 1
PIN 2	Out 1
Family construction form	terminal
No. of poles	
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	Out 2
PIN 2	Out 2
Family construction form	terminal
No. of poles	2
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK



PIN 1	Out 3
PIN 2	Out 3
Family construction form	terminal
No. of poles	2
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	Out 4
PIN 2	Out 4
Family construction form	terminal
No. of poles	4
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	On
PIN 2	On
PIN 3	13
PIN 4	14