

Mini (7/8) 3 pole, Receptacle, Female (Int.) Straight,

1/2" NPT, PVC, IEC Colors, 16AWG, 2 m

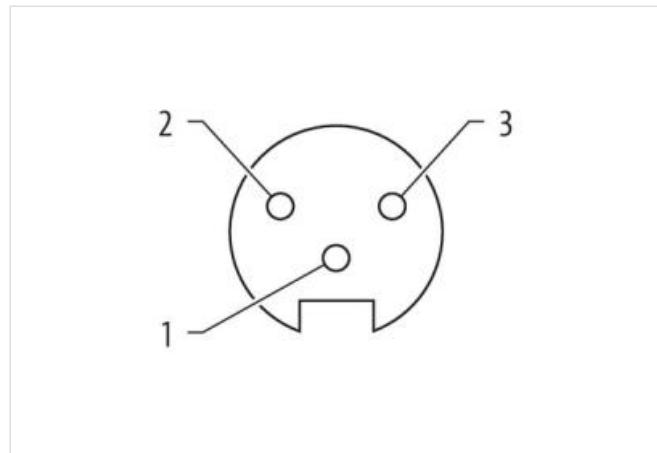
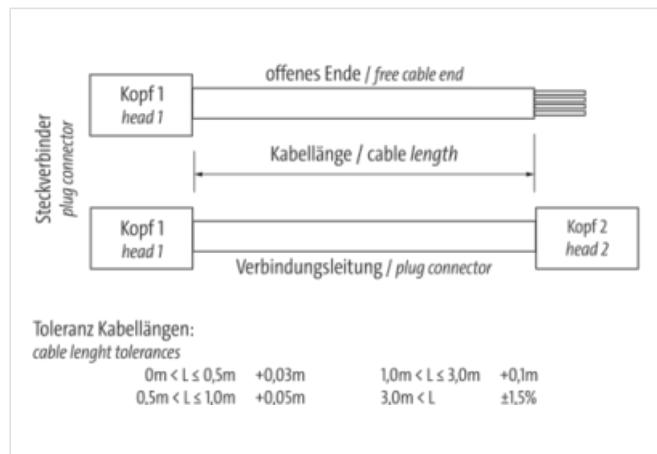
Art.No.: MURE-3FR-2M

Weight: 0.143 kg

Country of origin: US

Model designation: MIN-4FR-3-ME

7/8" (female)
 Flange female
 3-pole
 with multi-strand wire

[Link to Product](#)
Illustration


Product may differ from Image



Cable length

R-,2M m

Side 1

Tightening torque	1,5 Nm
Mounting method	inserted, screwed
Coating contact	gold plated
Family construction form	7/8"
Thread	7/8"
No. of poles	3
Degree of protection (EN IEC 60529)	IP67
Commercial data	
ECCLASS-6.0	27279220
ECCLASS-6.1	27279220
ECCLASS-7.0	27440103
ECCLASS-8.0	27440103
ECCLASS-9.0	27440103
ECCLASS-10.1	27440103
ECCLASS-11.1	27440103
ECCLASS-12.0	27440103
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855
ETIM-8.0	EC001855
customs tariff number	85444290
customs tariff number	85444290
EAN	4048879738743
EAN	4048879738743
Packaging unit	1
Packaging unit	1
Electrical data Supply	
Operating voltage AC max.	600 V
Operating voltage DC max.	600 V
Current operating per contact max.	13 A
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Mechanical data Material data	
Material housing	Zinc die-casting
Coating housing	nickel plated
Material gasket	NBR
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	105 °C
Additional condition temperature range	depending on cable quality
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.