

Mini (7/8) 5 pole, Receptacle, Male (Ext.) Straight,

1/2" NPT, PVC, IEC Colors, 16AWG, 2 m

Art.No.: MURE-5MR-2M

Weight: 0.220 kg



Country of origin: US

Model designation: MINE-5MR-2M-ME


7/8" (male), 5-pole
Flange male
with multi-strand wire

[Link to Product](#)

Illustration

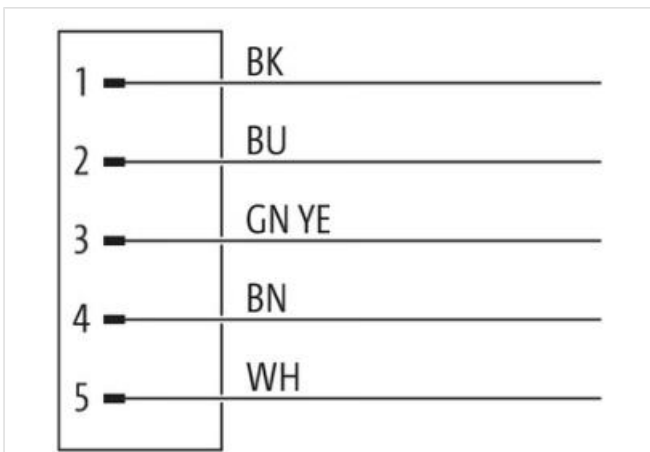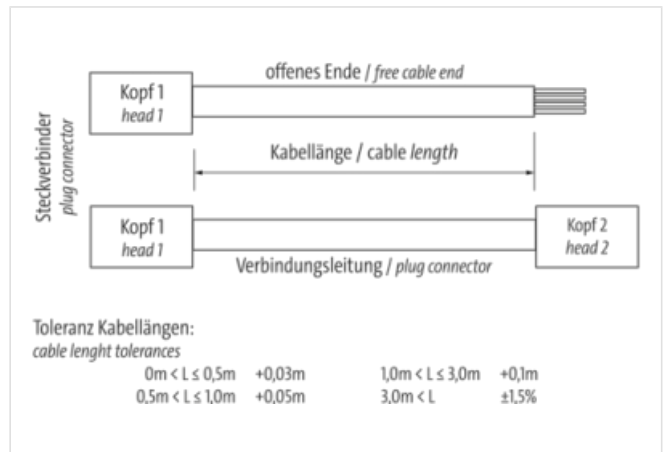

Product may differ from Image

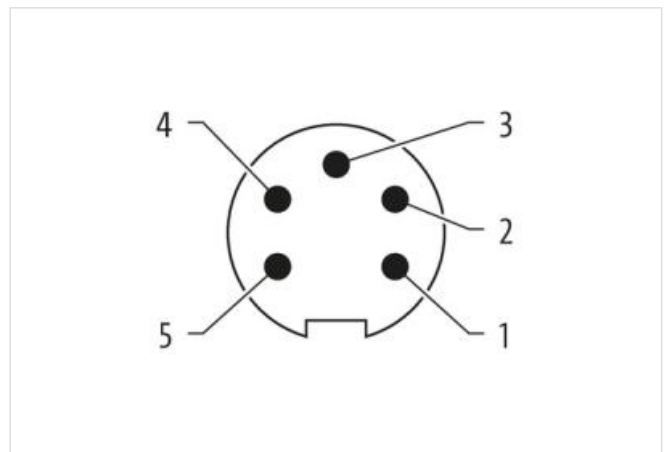

Cable length	R-,2M m
Side 1	
Tightening torque	1,5 Nm

Mounting method	inserted, screwed
Coating contact	gold plated
Family construction form	7/8"
Thread	7/8"
No. of poles	5
Degree of protection (EN IEC 60529)	IP67

Commercial data

ECLASS-6.0	27279220
ECLASS-6.1	27279220
ECLASS-7.0	27440103
ECLASS-8.0	27440103
ECLASS-9.0	27440103
ECLASS-10.1	27440103
ECLASS-11.1	27440103
ECLASS-12.0	27440103
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855
ETIM-8.0	EC001855
customs tariff number	85444290
customs tariff number	85444290
EAN	4048879738866
EAN	4048879738866
Packaging unit	1
Packaging unit	1

Electrical data | Supply

Operating voltage AC max.	600 V
Operating voltage DC max.	600 V
Current operating per contact max.	8 A

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed

Mechanical data | Material data

Material housing	Zinc die-casting
Coating housing	nickel plated
Material gasket	NBR

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
Operating temperature max.	105 °C
Additional condition temperature range	depending on cable quality

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.