

Xelity PROFINET Managed Switch 8x 10/100BT + 2x 10/100/1000BT IP67 M12L

5P

8 ports D-coded transfer rate 100 Mbit/s




PROFINET - Managed Switch


M12 Power, 5-pole, L-coded

Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)

Illustration

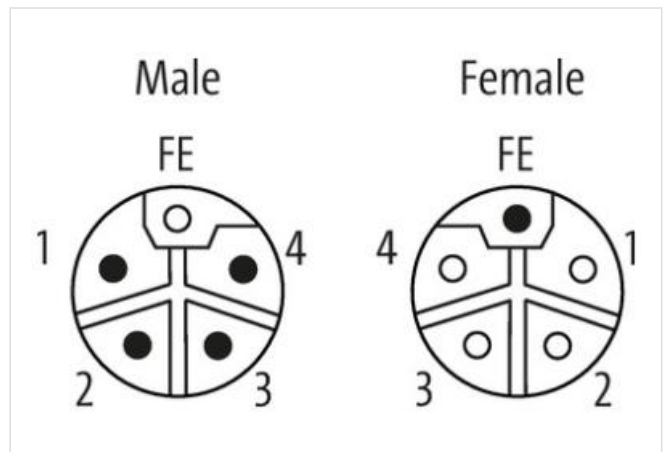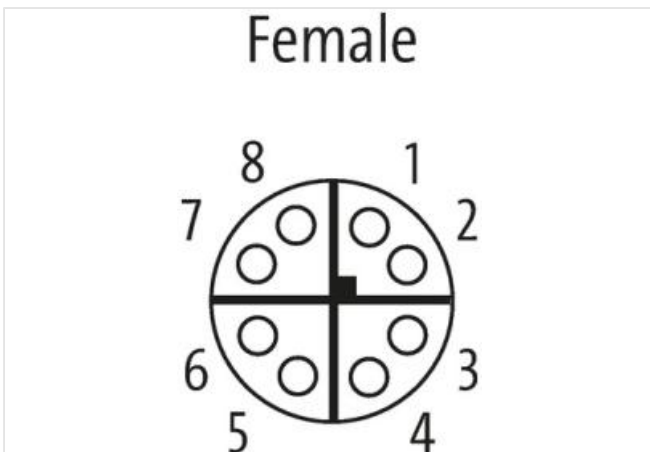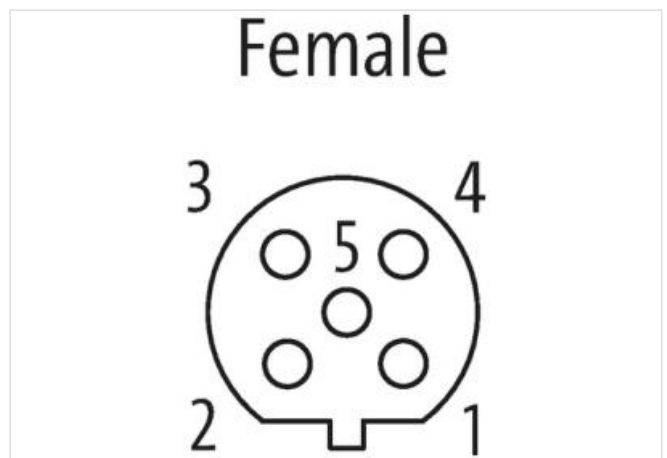

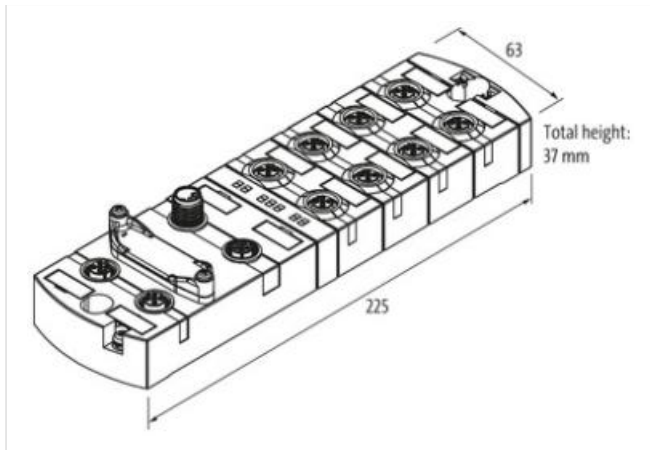

Product may differ from Image



classifications

ECLASS-6.1	19170106
ECLASS-7.0	19170106
ECLASS-8.0	19170106
ECLASS-9.0	19170401
ECLASS-10.1	19170401
ECLASS-11.1	19170401
ECLASS-12.0	19170401

Connections

Fieldbus	2x M12 (female), X-coded; 8x M12 (female), D-coded
Supply	2x M12 Power, 5-pole, L-coded, 2x max. 16 A

Technical Data

Operating voltage	9...36 V
Transfer rate	10/100/1000 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

Switch Management

Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog
NAT	yes
Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Webserver	HTTP, HTTPS
Switch Form	PROFINET - Managed Switch

General data

Mounting method	2-hole screw mounting
Temperature range	-25...+70 °C, ...+70 °C derating (storage temperature -40...+85 °C)
Housing	Metal
Protection	IP67
Dimensions HxWxD	37x63x225 mm

Diagnostic

Communication status	via LED, LLDP
----------------------	---------------

Monitoring - no voltage	yes
-------------------------	-----

PROFINET

Specification	V2.4, Conformance Class B
---------------	---------------------------

Addressing	DCP
------------	-----

FSU (Fast-Start-Up)	no
---------------------	----

PROFINET Netload Class	III
------------------------	-----

MRP	yes
-----	-----

Shared Device	no
---------------	----

Commercial data

customs tariff number	85176200
-----------------------	----------

GTIN	4048879862578
------	---------------

Packaging unit	1
----------------	---