

MA5I68 I/O MODUL

8 digital inputs


Compact module  
DI8 - 0.2 A (C) - 8× M8 (AB)  
Connection cables are in the online shop under "Connection Technology".  
Housing fully potted.  
Preset 1× address 1 A, 1× address 2 A

Link to Product

Illustration



Product may differ from Image

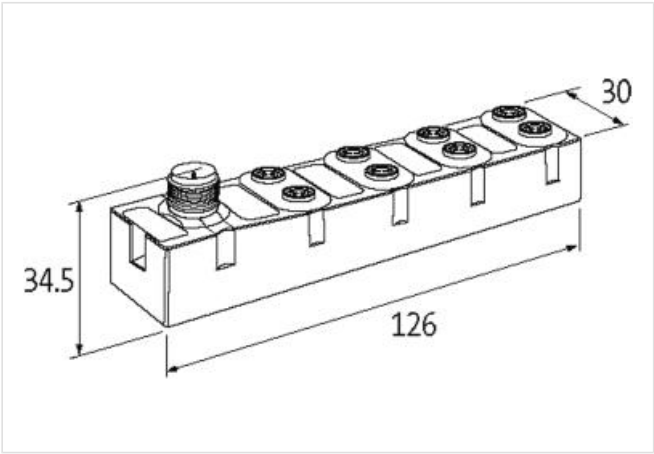

Commercial data	
ECLASS-6.0	27242604
ECLASS-6.1	27242604
ECLASS-7.0	27242604
ECLASS-8.0	27242604
ECLASS-9.0	27242604
ECLASS-10.1	27242604
ECLASS-11.1	27242604
ECLASS-12.0	27242604
ETIM-5.0	EC001599
customs tariff number	85176200
GTIN	4048879045599
Packaging unit	1
Electrical data   Supply	
Bus voltage AS-Interface DC min.	26,5 V
Bus voltage AS-Interface DC max.	31,6 V
Current consumption AS-i port max.	250 mA
Electrical data   Input	
Overload resistant	yes
Short-circuit protected	yes

Type input	PNP, for 3-wire sensors or mechanical switches
Current carrying capacity max.	0,2 A
<b>Industrial communication   Bus data</b>	
Address setting type	M12 connection and programming device, Master
Slave address range	(0), 1 A...31 A, 1 B...31 B
<b>Industrial communication   AS-Interface</b>	
AS-i Power 24	yes
Profile (IO.ID.ID2)	2× S-0.A.0
<b>Diagnostics</b>	
Diagnostic	No voltage
Diagnostic via LED	per module
LED display	Ethernet connection/data traffic
<b>Device protection   Electrical</b>	
Degree of protection (EN IEC 60529)	IP68
<b>Mechanical data   Mounting data</b>	
Mounting method	screwed
Height	126 mm
Width	30 mm
Depth	34,5 mm
<b>Environmental characteristics   Climatic</b>	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Storage temperature min.	-20 °C
Storage temperature max.	70 °C
<b>Connection type 2</b>	
Connection type 1	Bus In
Connection type 2	R
Family construction form	M12
Gender	male
Color contact carrier	black
Coding	A
No. of poles	4
PIN 1	AS-i +
PIN 2	n.c.
PIN 3	AS-i -
PIN 4	n.c.
Family construction form	M8
Gender	female
Color contact carrier	black
Coding	A
No. of poles	3
PIN 1	Usens +
PIN 3	Usens -
PIN 4	DI