

MKS/BCD-1300 DIODE MODULES


Mounting rail / screw-type terminal


Universal diode 1 300 V, 1 A Diode logic for converting hexadecimal to binary numbers

Link to Product

Illustration



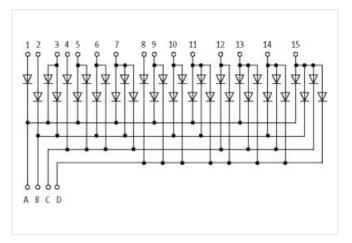



Product may differ from Image





Commercial data	
ECLASS-6.0	27371010
ECLASS-6.1	27371010
ECLASS-7.0	27371010
ECLASS-8.0	27371010
ECLASS-9.0	27371010
ECLASS-10.1	27371010
ECLASS-11.1	27371010
ECLASS-12.0	27371010

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-07



stay connected	I
----------------	---

ETIM-5.0	EC002780
customs tariff number	85411000
GTIN	4048879041829
Packaging unit	1
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, G32, (EN 60715)
Height	86 mm
Width	67,5 mm
Depth	62 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Connection type 2	
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	4
PIN 1	D
PIN 2	С
PIN 3	В
PIN 4	A
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	15