

HYBRID FIELD-BUS COUPLERS

Conversion electrical-electrical (passive)


CU, CU (female/female)  
Han-Brid ® a registered trademark of HARTING KGaA.

Link to Product

Illustration



Product may differ from Image

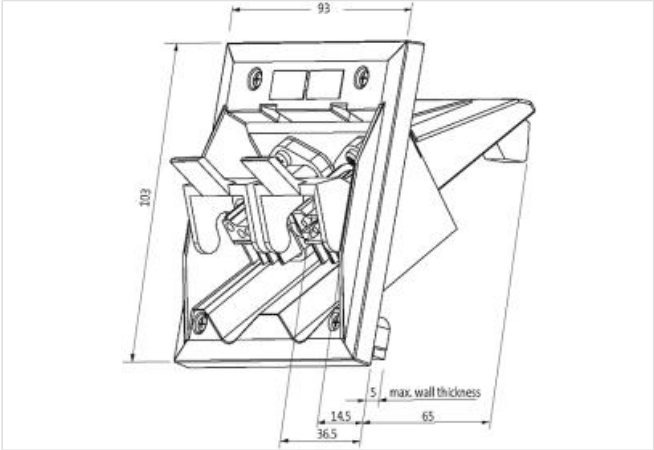

Commercial data	
ECLASS-6.0	27189217
ECLASS-7.0	27189217
ECLASS-8.0	27189217
ECLASS-9.0	27189217
ETIM-5.0	EC002641
customs tariff number	85366990
GTIN	4048879041492
Packaging unit	1
Electrical data   Supply	
Operating voltage DC	24 V
Industrial communication	
Data transmission rate max.	12 MBit/s
Installation	
Connection cross-section solid max.	0,25 mm²
Connection cross-section stranded/fine-stranded max.	2,5 mm²
Installation   Connection	
Connection	Spring clamp plug-in terminals
Device protection	
Shielded	no
Device protection   Media	

Flame resistance

flame retardant

Mechanical data   Material data	
Color housing	black
Material housing	Plastic
Mechanical data   Mounting data	
Height cutout	90 mm
Width cutout	80 mm
Height	103 mm
Width	93 mm
Depth	65 mm
Environmental characteristics   Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	50 °C