

MIRO 6.2 OPTO-COUPLER MODULE


IN: 130 VAC/DC - OUT: 250 VAC / 0,5A


Triac 0.5 A 110 V AC/DC Spring clamp terminals


Link to Product

Illustration



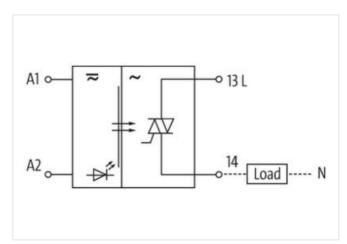

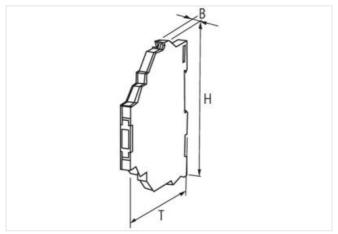

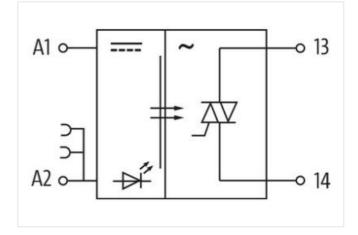

Product may differ from Image









27371601	
27371604	
27371604	
27371604	
27371604	
27371604	
	27371604 27371604 27371604 27371604



stay connected

ECLASS-120 2371604 ETIM-S.0 ECD01504 customs lanf numbur 8514800 GTIN 404878001708 Packaging unit 1 Bectrical data [Input Input vollage AC min 70 V Input vollage CFF AC min 0 V Input vollage OFF AC min 0 V Input vollage OFF AC min 0 V Input vollage DC min 0 V Input vollage DC min 70 V Input vollage DC min 10 ms Switch of Input vollage McMark and Switching frequency depending on writing Switch of Input vollage with programs 0 Draw Switch of delay max 10 ms Switch of delay max 10 ms <th>ECLASS-11.1</th> <th>27371604</th>	ECLASS-11.1	27371604
ETIMA 5.0		
customs barff number 854 4850 GTIN 408879021708 Packaging unit 1 Electrical data Input 70 V Input vollage AC min. 70 V Input vollage AC max. 130 V Input vollage OFF AC min. 0 V Input vollage OFF DC min. 0 V Input vollage OFF DC min. 0 V Input vollage OFF DC min. 70 V Input vollage DC min. 10 V Switch on dalay such as a suc		
STIME 49-8887901709 T		
Packaging unit		
Page		
Input voltage AC min. 70 V Input voltage AC max. 39 V Input voltage OFF AC min. 0 V Input voltage OFF AC max. 35 V Input voltage OF DC min. 0 V Input voltage OF max. 35 V Input voltage DC max. 130 V Input voltage DC max. 130 V Input voltage DC max. 3.6 mA Electrical data I Output V Switch of delay max. 10 me Switch of delay max. 10 me Quiescent current OFF max. 0.3 mA Additional condition switching frequency depending on wiring Switching frequency max. 20 Hz Voltage switching AC min. 12 V Switching current min. 2 EX Voltage switching AC mix. 15 V Switching current min. 0.5 A Voltage orby AC max. 1.5 V Plagnetics State Status indecision LED yellow Powce protection Electrical Rause are setators Material housing Plastic Mechanical data Mat		•
Input voltage AC max		
Input voitage OFF AC min.		
Input voltage OFF AC max: 35 V Input voltage OFF DC min. DV DV DV DV DV DV DV D	•	
Input voltage OFF DC min. Input voltage OFF DC max. 35 V Input voltage OFF DC max. 130 V Input voltage DC max. 130 V Input current max. 3,6 mA Belotrical data Output Switch off delay max. 10 ms Switch off delay max. 10 ms Switch off delay max. 10 ms Switch off delay max. 20 Hz Switch off delay max. 20 Hz Switch off delay max. 20 Hz Switching requency max. 20 Hz Switching requency max. 20 Hz Switching output min. 2 mA Switching output min. 2 mA Switching output min. 3 mA Switching output min. 4 mA Switching output min. 5 mA Switching output min. 5 mA Switching output min. 6 mA Switching output min. 7 mA Switching output min. 8 mA Switching output min. 9 mA Switching output min. 9 mA Switching output min. 1,5 V Diagnosties Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Material data Color housing black Material housing Plastic Mechanical data Mounting data Mounting method 9 geschnappt Width 6,2 mm Depth 78 mm Width 6,2 mm Depth 78 mm Fervironmental characteristics Climatic Operating temperature min. 20 °C Connection Spring clamp terminals FK Family construction from Iterminal Gender Color contact carrier Spring damp terminals FK Family construction from Iterminal	•	
Input voltage OFF DC max. 70 V Input voltage DC min. 130 V Input current max. 3,6 mA Electrical data Output Switch on delay max. 10 ms Switch on delay max. 10 ms Switch on delay max. 10 ms Switch on delay max. 20 Hz Switching requency depending on wiring Switching requency max. 20 Hz Voltage switching AC min. 12 V Switching voltage AC max. 250 V Switching current max. 0.5 A Switching current max. 0.5 A Switching current max. 0.5 A Switching current max. 0.5 S Switching cu		
Input voltage DC min. 70 V Input voltage DC mix. 130 V 130 V		
Input vollage DC max. 130 V Input current max. 3,6 mA Electrical data Output Switch of delay max. 10 ms Switch of delay max. 10 ms Quiescent current OFF max. 0,3 mA Additional condition switching frequency depending on wiring 40 mg Switching frequency max. 20 Hz Voltage witching AC min. 12 V Switching current min. 2 mA Switching current max. 0,5 A Voltage drop AC max. 1,5 V Device protection Machina 1,5 V Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Color housing Machinal housing Plastic Mechanical data Mounting data Mounting method geschnapt Suitable for mounting type mounting mail, (EN 60715) Height 78 mm Width 6,2 mm Depth		
Input current max. 3,6 mA Electrical data Output Switch off delay max. 10 ms Switch off delay max. 10 ms Ouiescent current OFF max. 0,3 mA Additional condition switching frequency depending on wiring Switching facturent max. 20 tz Switching AC min. 12 V Switching voltage AC max. 250 V Switching voltage AC max. 250 V Switching current max. 0,5 A Voltage drop AC max. 1,5 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Electrical Rated surge voltage 1 fame retardant Mechanical data Material data Color housing black Material data Material data Mechanical data Mounting data Mechanical data Mounting data Mechanical data Mounting data Midth 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min. 20 °C Connection yee 4 Connection Spring clamp terminals FK Family construction form terminal Environmental construction form terminal		
Electrical data Output Switch off delay max. 10 ms Switch on delay max. 10 ms Switch on delay max. 10 ms Switch on delay max. 10 ms Additional condition switching frequency depending on wiring Switching frequency max. 20 Hz Voltage switching AC min. 12 V Switching outlage AC max. 250 V Switching outlage AC max. 250 V Switching current min. 2 mA Switching current min. 2 m k Switching current min. 3 m k Switching current min. 4 m k Mechanical data Material data Switching black Material housing black Material housing black Material housing data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Mounting method 6.2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender terminal Gender terminal		
Switch off delay max. 10 ms Switch on delay max. 10 ms Quiescent current OFF max. 0,3 mA Additional condition switching frequency Switching frequency max. 20 Hz Voltage switching AC min. 12 V Switching outrent min. 2 mA Switching current min. 2 mA Switching current min. 2 mA Switching current max. 0,5 A Voltage frop AC max. 1,5 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage AC switching AC min. 12 S kV Device protection Media Flame resistance flame retardant Mechanical data Material data Color housing black Material housing plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Environmental characteristics Climatic Environmental characteristics Climatic Coperating temperature min20 °C Operating temperature min20 °C Connection type 4 Connection Spring clamp terminal ER Gender (emale Color contact carrier) black	Input current max.	3,6 mA
Switch on delay max. 10 ms Quiescent current OFF max. 0,3 mA Additional condition switching frequency depending on wiring Switching frequency max. 20 Hz Voltage switching AC min. 12 V Switching voltage AC max. 250 V Switching current min. 2 mA Switching current min. 0,5 A Voltage drop AC max. 1,5 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame retardant Mechanical data Material data Mechanical data Material data Mechanical data Material data Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Coperating temperature min20 °C Operating temperature min. -20 °C Connection ypp 4 Connection Spring clamp terminal FK Family construction form terminal Gender female Color contact carrier	Electrical data Output	
Quiescent current OFF max. 0,3 mA Additional condition switching frequency depending on wiring Switching frequency max. 20 Hz Voltage switching AC min. 12 V Switching outrage AC max. 250 V Switching current min. 2 mA Switching current max. 0,5 A Voltage drop AC max. 1,5 V Diagnostics Status indication LED Status indication LED yellow Device protection Electrical Rated surge voltage Rated surge voltage 2,5 kV Device protection Media Fame resistance Flame resistance flame retardant Mechanical data Material data Color housing Mechanical data Material data Web (Color housing) Material housing Plastic Multiplies for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Coperating temperature min. -20 °C Operating temperature min.	Switch off delay max.	10 ms
Quiescent current OFF max. 0,3 mA Additional condition switching frequency depending on wiring Switching frequency max. 20 Hz Voltage switching AC min. 12 V Switching outrage AC max. 250 V Switching current min. 2 mA Switching current max. 0,5 A Voltage drop AC max. 1,5 V Diagnostics Status indication LED Status indication LED yellow Device protection Electrical Rated surge voltage Rated surge voltage 2,5 kV Device protection Media Fame resistance Flame resistance flame retardant Mechanical data Material data Color housing Mechanical data Material data Web (Color housing) Material housing Plastic Multiplies for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Coperating temperature min. -20 °C Operating temperature min.	-	10 ms
Additional condition switching frequency max. 20 Hz Voltage switching AC min. 12 V Switching voltage AC max. 250 V Switching current min. 2 mA Switching current min. 2 mA Switching current max. 0.5 A Voltage drop AC max. 1,5 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Color housing Plastic Mechanical data Munting data Munting method geschnappt Suitable for mounting type mounting rall, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Environmental temperature min. 20 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender (ender)	·	0,3 mA
Switching frequency max. 20 Hz Voltage switching AC min. 12 V Switching voltage AC max. 250 V Switching current min. 2 mA Switching current min. 2 mA Switching current max. 0,5 A Voltage drop AC max. 1,5 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Color housing black Material housing Plastic Mechanical data Muniting data Mounting method geschnappt Suitable for mounting type mounting rall, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Environmental characteristics Climatic Environmental temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender (emale Color contact carrier)	Additional condition switching frequency	depending on wiring
Voltage switching AC min. 12 V Switching voltage AC max. 250 V Switching current min. 2 mA Switching current max. 0,5 A Voltage drop AC max. 1,5 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Color housing black Material housing Plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Switching frequency max.	
Switching vortage AC max. 250 V Switching current min. 2 mA Switching current max. 0,5 A Voltage drop AC max. 1,5 V Voltage drop AC max. 1,5 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame retardant Mechanical data Material data Color housing black Material housing Plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection ye 4 Connection Spring clamp terminals FK Family construction form termial Gender (emale Color contact carrier)		12 V
Switching current min. 2 mA Switching current max. 0,5 A Voltage drop AC max. 1,5 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Color housing black Material housing Plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Connection type 4 Connection type 4 Connection Type 4 Connection form terminal Gender female Color contact carrier black		250 V
Switching current max. 0,5 A Voltage drop AC max. 1,5 V Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Color housing black Material housing Plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier		2 mA
Diagnostics Status indication LED yellow Device protection Electrical Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Color housing black Material housing Plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Coperating temperature min. -20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black		0,5 A
Status indication LED yellow Pevice protection Electrical Rated surge voltage 2.5 kV Pevice protection Media Flame resistance flame retardant Mechanical data Material data Color housing black Material housing Plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Wichth 6.2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature max. 60 °C Connection type 4 Connection Gender female Color contact carrier black Very Connection (Female) Color contact carrier black Description (Female) Color contact carrier black Very Connection (Female) Color contact carrier black Description (Female)	Voltage drop AC max.	1,5 V
Pevice protection Electrical Rated surge voltage 2,5 kV Pevice protection Media Flame resistance flame retardant Mechanical data Material data Color housing black Material housing Plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Diagnostics	
Rated surge voltage 2,5 kV Device protection Media Flame resistance flame retardant Mechanical data Material data Color housing black Material housing Plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier	Status indication LED	yellow
Device protection Media Flame resistance flame retardant Mechanical data Material data Color housing black Material housing Plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Device protection Electrical	
Flame resistance flame retardant Mechanical data Material data Color housing black Material housing Plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Rated surge voltage	2,5 kV
Mechanical data Material data Color housing black Material housing Plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Device protection Media	
Mechanical data Material data Color housing black Material housing Plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Flame resistance	flame retardant
Color housing black Material housing Plastic Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black		
Mechanical data Mounting data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black		
Mechanical data Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	_	
Mounting method geschnappt Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	·	PIASTIC
Suitable for mounting type mounting rail, (EN 60715) Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Mechanical data Mounting data	
Height 78 mm Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Mounting method	geschnappt
Width 6,2 mm Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Suitable for mounting type	mounting rail, (EN 60715)
Depth 70 mm Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Height	78 mm
Environmental characteristics Climatic Operating temperature min20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Width	6,2 mm
Operating temperature min. -20 °C Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Depth	70 mm
Operating temperature max. 60 °C Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Environmental characteristics Climatic	
Connection type 4 Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Operating temperature min.	-20 °C
Connection Spring clamp terminals FK Family construction form terminal Gender female Color contact carrier black	Operating temperature max.	60 °C
Family construction form terminal Gender female Color contact carrier black	Connection type 4	
Gender female Color contact carrier black	Connection	Spring clamp terminals FK
Gender female Color contact carrier black	Family construction form	
		female
	Color contact carrier	black
ivo. ui puies	No. of poles	1

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-09



stay connected

PIN 1	13
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	14
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	A 1
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	A 2