
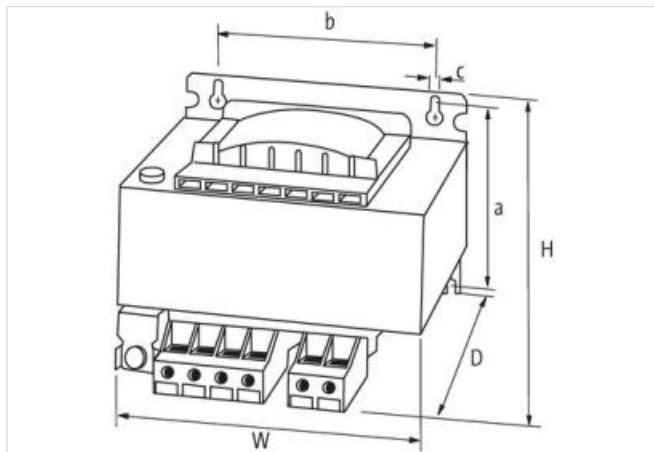


P: 500VA IN: 230/400VAC OUT: 230VAC

Link to Product

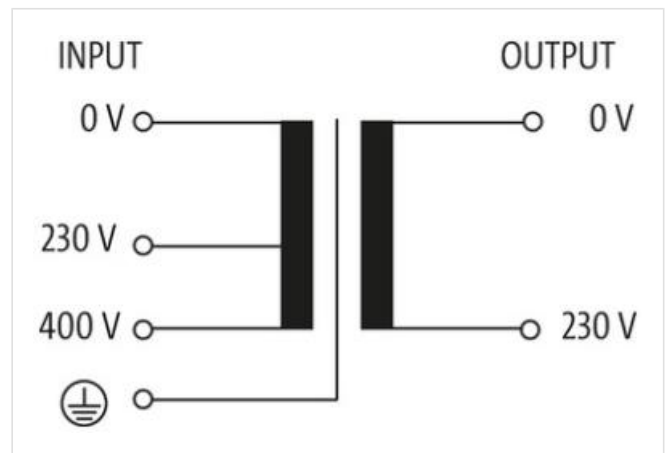

| | |
|------------|----------|
| ECLASS-6.0 | 27031302 |
| ECLASS-6.1 | 27031302 |
| ECLASS-7.0 | 27031302 |
| ECLASS-8.0 | 27031302 |
| ECLASS-9.0 | 27031302 |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-03

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

| | |
|-----------------------|---------------|
| ECLASS-10.1 | 27031302 |
| ECLASS-11.1 | 27031302 |
| ECLASS-12.0 | 27031302 |
| ETIM-5.0 | EC002486 |
| customs tariff number | 85043180 |
| GTIN | 4048879066228 |
| Packaging unit | 1 |

Electrical data | Supply

| | |
|-----------------|--------------|
| Power frequency | 50 ... 60 Hz |
|-----------------|--------------|

Electrical data | Input

| | |
|--|--------|
| Input voltage 1 AC | 230 V |
| Input voltage 2 AC | 400 V |
| Input current at input voltage 1 AC | 2,4 A |
| Input current at input voltage 2 AC | 1,4 A |
| Inrush current at input voltage 1 | 28,1 A |
| Inrush current at input voltage 2 | 16,3 A |
| Short-circuit current at input voltage 1 | 54 A |
| Short-circuit current at input voltage 2 | 31,2 A |

Electrical data | Output

| | |
|---------------------------|--------|
| Output voltage AC | 230 V |
| Output voltage adjustable | no |
| Power rating AC max. | 500 VA |

Device protection | Electrical

| | |
|--|------|
| Insulation test voltage input - output | 4 kV |
|--|------|

Mechanical data | Mounting data

| | |
|----------------------------|------------------------|
| Suitable for mounting type | Schlüssellochabhängung |
| Mounting dimension a | 87 mm |
| Mounting dimension b | 104 mm |
| Mounting dimension c | 5,8 mm |
| Height | 108 mm |
| Width | 135 mm |
| Depth | 133,6 mm |
| Diameter bore | 5,8 mm |
| Length bore | 10 mm |

Environmental characteristics | Climatic

| | |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 40 °C |
| Storage temperature min. | -40 °C |
| Storage temperature max. | 80 °C |

Conformity

| | |
|------------------|-----------------------------------|
| Product standard | EN 61558-2-6, EN 62041 category 0 |
|------------------|-----------------------------------|

Connection type 3

| | |
|--------------------------|--------------------|
| Connection type 1 | Input |
| Connection type 2 | Output |
| Connection | Screw terminals SK |
| Family construction form | terminal |
| Gender | female |
| No. of poles | 3 |
| PIN 2 | 230 V |
| PIN 3 | 400 V |
| Connection | Screw terminals SK |

| | |
|--------------------------|--------------------|
| Family construction form | terminal |
| Gender | female |
| No. of poles | 2 |
| PIN 2 | 230 V |
| Connection | Screw terminals SK |
| Family construction form | terminal |
| Gender | female |
| Color contact carrier | metallic |
| No. of poles | 1 |
| PIN 1 | PE |