

MSDD pass-through RJ45 CAT5e femal/femal, design black


Neutral lid without logo


Pass-through 1× RJ45, 8-pole CAT5e (female/female)


Link to Product

Illustration



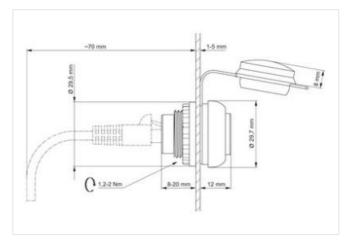


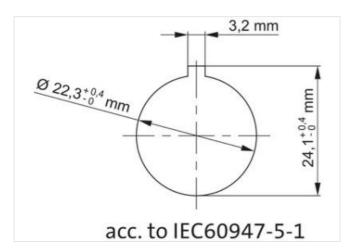


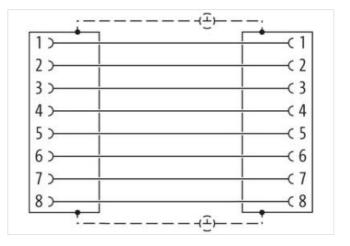



stay connected

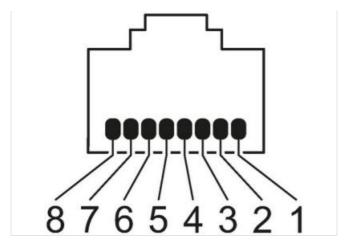

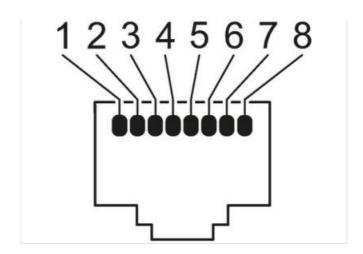

Product may differ from Image







ECLASS-6.1 27143419 ECLASS-7.0 27440515 ECLASS-9.0 27440515 ECLASS-9.0 27440515 ECLASS-9.1 27440515 ECLASS-10.1 27440515 ECLASS-10.1 27440515 ECLASS-11.1 27440515 ECLASS-12.0 27440515 ECLASS-12.0 27440515 ETIM-5.0 ECOM2625 Dustoms tariff number 85366990 ETIM 4065909035931 Packaging unit 1 Electrical data Supply Deprating voltage AC 24 V Deprating voltage AC 24 V Deprating unit and the supply of the supp	Commercial data	
ECLASS-7.0 27440515 ECLASS-8.0 27440515 ECLASS-9.0 27440515 ECLASS-10.1 27440515 ECLASS-11.1 27440515 ECLASS-12.0 27440515 ECLASS-12.0 27440515 ECLASS-12.0 27440515 ECLASS-12.0 27440515 ECLASS-12.0 27440515 ECLASS-13.1 27440515 ECLASS-14.0 27440515 ECLASS-14.0 27440515 ECLASS-15.0 ECO02625 EQUITOR STATE OF THE OFFICIAL OFFICI	ECLASS-6.0	27143423
ECLASS-8.0 27440515 ECLASS-9.0 27440515 ECLASS-9.10.1 27440515 ECLASS-11.1 27440515 ECLASS-11.1 27440515 ECLASS-12.0 27440515 ECLASS-12.0 27440515 ECLASS-12.0 27440515 ECLASS-12.0 27440515 ECLASS-12.0 1 27440515 ECLASS-12.0 2740515 ECLASS-12.0 27440515 ECLASS-12.0 2740515 ECLASS-12.0 274051 ECLASS-12.0 274051 ECLAS-12.0 274051 ECL	ECLASS-6.1	27143419
ECLASS-9.0 27440515 ECLASS-10.1 27440515 ECLASS-11.1 27440515 ECLASS-12.0 27440515 ETIM-5.0 EC002625 bustoms tariff number 85366990 ETIM 4065909035931 Electrical data Supply Departing voltage AC 24 V Departing voltage AC 24 V Departing current max. 1,5 A Installation Connection Family construction form RJ46 Bender female Cable category min. Cat5e Device protection Mechanical Device protection IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree To50 Cycles Mechanical endurance 750 Cycles Mechanical endurance Monthing data	ECLASS-7.0	27440515
ECLASS-10.1 27440515 ECLASS-11.1 27440515 ECLASS-12.0 27440515 ECLASS-12.0 27440515 ECLASS-12.0 ECO2625 Dustoms tariff number 85366990 STIN 4065909035931 Packaging unit 1 Electrical data Supply Deprating voltage AC 24 V Deprating voltage DC 24 V Deprating urrent max. 1,5 A Installation Connection Family construction form RJ46 Gender female Gender female Gender female Cable category min. Cat5e Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical endurance Mechanical data Mounting data	ECLASS-8.0	27440515
ECLASS-11.1 27440515 ECLASS-12.0 27440515 ECIMS-5.0 EC002625 customs tariff number 85366990 3TIN 4065909035931 Packaging unit 1 Electrical data Supply Operating voltage AC 24 V Operating voltage DC 24 V Operating current max. 1,5 A Installation Connection	ECLASS-9.0	27440515
ECLASS-12.0 27440515 ETIM-5.0 EC002625 sustoms tariff number 85366990 GTIN 4065909035931 Packaging unit 1 Electrical data Supply Deperating voltage AC 24 V Operating voltage DC 24 V Operating current max. 1,5 A Installation Connection Family construction form RJ46 Gender Rear [emale Gender Rear [emale Cable category min. Cat5e Device protection Shielded yes Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	ECLASS-10.1	27440515
ETIM-5.0 EC002625 customs tariff number 85366990 3TIN 4065909035931 Packaging unit 1 Electrical data Supply Operating voltage AC 24 V Operating current max. 1,5 A Installation Connection Family construction form RJ46 Gender female Gender Rear female Cable category min. Cat5e Device protection Shielded yes Device protection Electrical Degree of protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical data Mounting data	ECLASS-11.1	27440515
State Stat	ECLASS-12.0	27440515
Packaging unit 1 Electrical data Supply Operating voltage AC 24 V Operating voltage DC 24 V Operating current max. 1,5 A Installation Connection Family construction form RJ46 Gender female Gender female Cable category min. Cat5e Device protection Shielded yes Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical data Mounting data	ETIM-5.0	EC002625
Packaging unit 1 Electrical data Supply Deperating voltage AC 24 V Deperating voltage DC 24 V Deperating current max. 1,5 A Installation Connection Family construction form RJ46 Gender female Gender Rear female Cable category min. Cat5e Device protection Shielded yes Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	customs tariff number	85366990
Electrical data Supply Deperating voltage AC 24 V Deperating voltage DC 24 V Deperating current max. 1,5 A Installation Connection Family construction form RJ46 Gender female Gender Rear female Cable category min. Cat5e Device protection Shielded yes Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	GTIN	4065909035931
Operating voltage AC 24 V Operating voltage DC 24 V Operating current max. 1,5 A Installation Connection Family construction form RJ46 Gender female Gender female Cable category min. Cat5e Device protection Shielded yes Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical data Mounting data	Packaging unit	1
Departing voltage DC 24 V Departing current max. 1,5 A Installation Connection Family construction form RJ46 Gender female Gender Rear female Cable category min. Cat5e Device protection Shielded yes Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical data Mounting data	Electrical data Supply	
Operating current max. 1,5 A Installation Connection Family construction form RJ46 Gender female Gender Rear female Cable category min. Cat5e Device protection Shielded yes Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	Operating voltage AC	24 V
Installation Connection Family construction form RJ46 Gender female Gender Rear female Cable category min. Cat5e Device protection Shielded yes Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical data Mounting data	Operating voltage DC	24 V
Family construction form RJ46 Gender female Gender Rear female Cable category min. Cat5e Device protection Shielded yes Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	Operating current max.	1,5 A
Gender Rear female Cable category min. Cat5e Device protection Shielded yes Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	Installation Connection	
Gender Rear female Cable category min. Cat5e Device protection Shielded yes Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	Family construction form	RJ46
Cable category min. Cat5e Device protection Shielded yes Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	Gender	female
Device protection Shielded yes Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	Gender Rear	female
Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	Cable category min.	Cat5e
Device protection Electrical Degree of protection (EN IEC 60529) IP20, IP65 Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	Device protection	
Degree of protection (EN IEC 60529) Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	Shielded	yes
Protection NEMA 2, 3R, 4, 12, 13, 4x Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	Device protection Electrical	
Additional condition protection degree inserted, in closed state Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	Degree of protection (EN IEC 60529)	IP20, IP65
Device protection Mechanical Mechanical endurance 750 Cycles Mechanical data Mounting data	Protection NEMA	2, 3R, 4, 12, 13, 4x
Mechanical endurance 750 Cycles Mechanical data Mounting data	Additional condition protection degree	inserted, in closed state
Mechanical data Mounting data	Device protection Mechanical	
	Mechanical endurance	750 Cycles
Diameter cutout 22,5 mm	Mechanical data Mounting data	
	Diameter cutout	22,5 mm

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-21



Diameter	29,5 mm	
Mounting depth	70 mm	
Depth	20 mm	
Approvals		
UL 50E	yes	