MURR ELEKTRONIK
stay connected

M12 female 0° A-cod. IDC

4-pol., 0.25 - 0.5mm², 4 - 5,1mm

Art.No.: 7000-12601-0000000
Weight: 0.023
Country of origin: DE
Model designation: MSBL0-AC-T-IDC

Female straight
M12, 4-pole
IDC terminals
Connection cross section: 0.25...0.5 mm²
Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

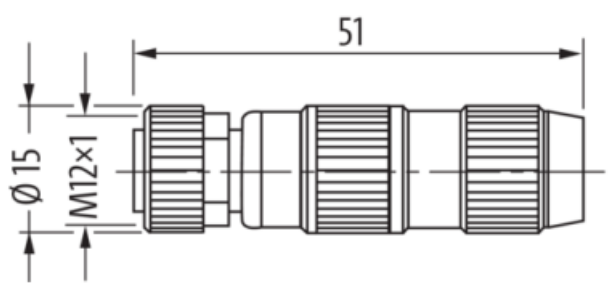

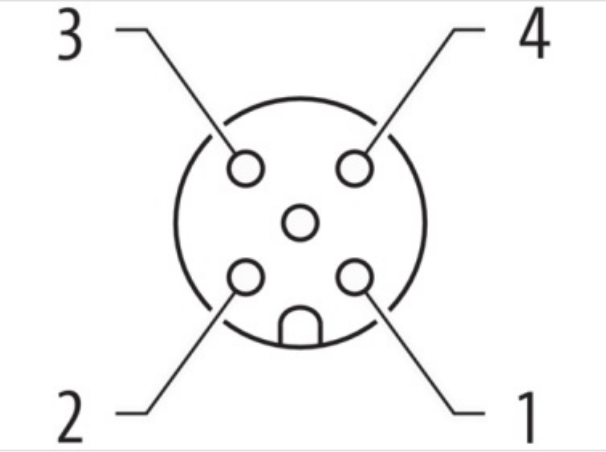

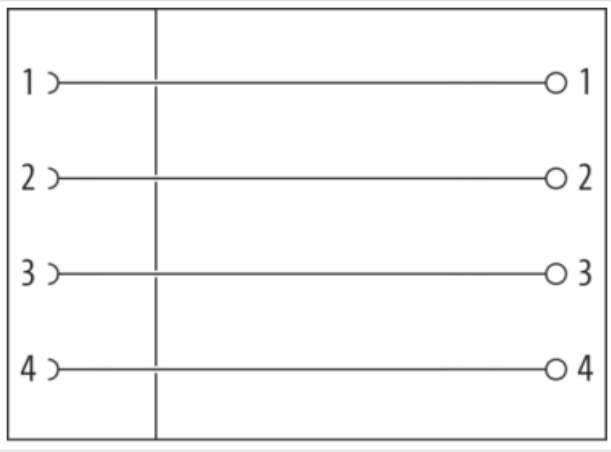

Product may differ from Image

Side 1

Family construction form	M12

MURR ELEKTRONIK
stay connected

Degree of protection (EN IEC 60529)	IP67
Commercial data	
URL Webshop	https://shop.murrelektronik.com/7000-12601-0000000
GTIN	4048879201759
ECLASS-6.0	27279221
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-7.1	27440102
ECLASS-8.0	27440102
ECLASS-8.1	27440102
ECLASS-9.0	27440116
ECLASS-9.1	27440106
ECLASS-10.0.1	27440106
ECLASS-10.1	27440102
ECLASS-11.0	27440106
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440106
ECLASS-14.0	27440106
ETIM-5.0	EC002635
ETIM-6.0	EC002635
ETIM-7.0	EC002635
ETIM-8.0	EC002635
EAN	4048879201759
Electrical data | Supply	
Operating voltage AC max.	32 V
Operating voltage DC max.	32 V
Current operating per contact max.	4 A
Installation	
Single wire diameter min.	0.1 mm
Connection cross section min.	0.25
Connection cross section max.	0.5
Installation | Connection	
Tightening torque	0.6 Nm
Wire insulation diameter min.	1.2 mm
Wire insulation diameter max.	1.6 mm
Device protection | Electrical	
Additional condition protection degree	inserted, screwed
Mechanical data | Mounting data	
Height	51 mm
Width	15 mm
Depth	15 mm
Mounting method	inserted, screwed, Shaking protection
Clamping range min.	4 mm
Clamping range max.	5.1 mm
Environmental characteristics | Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C
Important installation notes	
Note on bending radius	**Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.