

MASI20 I/O MODULE K3

4 digital inputs, 4 digital, passive safety outputs

Digital inputs/outputs

Safe outputs (Safety)


Output groups up to PLd (EN ISO 13849-1) can be switched off via safety relays

DI4 - 0.2 A DO4 - 0.5 A (AB) (K3)

Current manuals can be downloaded at: www.murrelektronik.com

Link to Product

Illustration

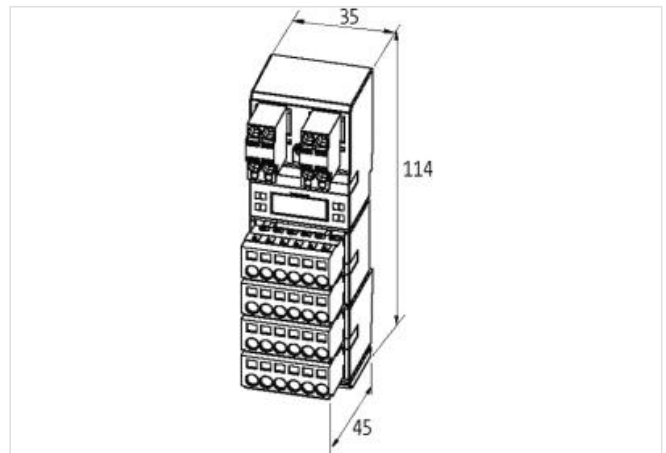

Product may differ from Image



Technical Data

Total current (AS-Interface)	max. 300 mA
Bus voltage (AS-Interface)	26.5...31.6 V DC
Profile (IO/ID/ID2 code)	S-7.A.7
Addressing	via built-in address port or master
Address range	1...62 (1...31 A or B)

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C (storage temperature -20...+70 °C)
Protection	IP20
Connection	Spring clamp plug-in terminal: 0.2...2.5 mm ²
Dimensions HxWxD	114x37x32 mm

Output

Supply voltage	24 V DC (18...30.2 V DC) EN 61131-2 by additional supply, safely separated from input supply
Switch off time in case of short circuit	approx. 20 ms
Total current	max. 2 A
Switching current per output	max. 0.5 A (short-circuit and overload protected)

Input

Sensor supply US	max. 200 mA externally or from AS Interface (short-circuit and overload protected)
------------------	--

Supply voltage	alternatively (switchable) from AS-Interface or from 24 V DC (EN 61131-2) by additional supply
Type	for 3-wire sensors or mechanical switches, PNP
Input current	max. 10 mA
Product article number of manufacturer	56440
Diagnostic	
Communication status	via LED
Diagnostic via LED	per module
Monitoring - no voltage	yes