

MIRO TR 5VDC SK OPTO-COUPLER MODULE

IN: 5,5 VDC - OUT: 48 VDC / 2 A

Art.No.: 52502 Weight: 0.024 Country of origin: CZ


Model designation: MIRO,TR, 5VDC,SK


Transistor 2 A 5 V DC Screw terminals


Link to Product

Illustration







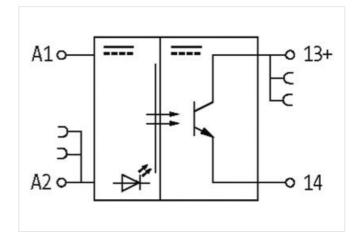

Product may differ from Image









Commercial data		
ECLASS-6.0	27371604	
ECLASS-6.1	27371604	
ECLASS-7.0	27371604	
ECLASS-8.0	27371604	

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-04-26



stay connected

ECLASS-9.0	27371604
ECLASS-10.1	27371604
ECLASS-11.1	27371604
ECLASS-12.0	27371604
ETIM-5.0	EC001504
ETIM-6.0	EC001504
ETIM-7.0	EC001504
ETIM-8.0	EC001504
customs tariff number	85414900
customs tariff number	85414900
GTIN	4048879026925
GTIN	4048879026925
Packaging unit	1
Packaging unit	1
Electrical data Input	
Input voltage DC min.	4 V
Input voltage DC max.	5,5 V
Input voltage OFF DC min.	0 V
Input voltage OFF DC max.	2 V
Current input DC	7 mA
Electrical data Output	
Switch off delay max.	5 ms
Switch on delay max.	1 ms
Quiescent current OFF max.	0,01 mA
Switching frequency inductive max.	1 Hz
Switching frequency ohmic max.	10 Hz
Voltage switching DC min.	5 V
Switching voltage DC max.	48 V
Switching current min.	1 mA
Switching current max.	2 A
Voltage drop DC max.	0,3 V
Diagnostics	
Status indication LED	yellow
Device protection Electrical	
Rated surge voltage	2,5 kV
Device protection Media	
Flame resistance	flame retardant
	nano retaluant
Mechanical data Material data	
Material housing	Plastic
Color housing	black
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	78 mm
Width	6,2 mm
Depth	70 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Connection type 4	



Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	13 +
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	14
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	A1+
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	A 2 -