


Xelity 4TX Unmanaged Switch 4 Port 100Mbit

Art.No.: 58810
Weight: 0.128 kg
Country of origin: DE
Model designation: Xelity 4TX

4 port unmanaged switch
Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration

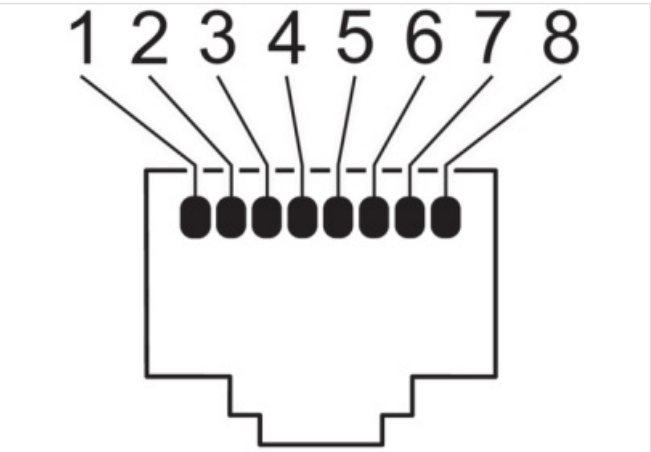

Product may differ from Image



Header	
Material short text	Xelity 4TX
Commercial data	
URL Webshop	https://shop.murrelektronik.com/58810
GTIN	4048879785952
ECLASS-6.0	19170106
ECLASS-6.1	19170106

ECLASS-7.0	19170106
ECLASS-7.1	19170106
ECLASS-8.0	19170106
ECLASS-8.1	19170106
ECLASS-9.0	19170402
ECLASS-9.1	19170106
ECLASS-10.0.1	19170402
ECLASS-10.1	19170402
ECLASS-11.0	19170402
ECLASS-11.1	19170402
ECLASS-12.0	19170402
ECLASS-13.0	19170402
ECLASS-14.0	19170402
ETIM-5.0	EC000734
ETIM-6.0	EC000734
ETIM-7.0	EC000734
ETIM-8.0	EC000734
customs tariff number	85176200
EAN	4048879785952
Packaging unit	1

Electrical data | Supply

Operating voltage DC min.	9,5 V
Operating voltage DC max.	31,5 V
Current consumption max.	35 mA

Industrial Communication

Data transmission rate max.	100 Mbit/s
-----------------------------	------------

Industrial communication | Ethernet functionality

VLAN unmanaged (IEEE 802.1Q)	Yes
Switch type	unmanaged
duplex	Full duplex
Auto-negotiation	Yes
Auto-crossover	Yes

Diagnostics

Alarm contact	No
Diagnostic	No voltage
LED display	Ethernet connection/data traffic

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP20
Invers-polarity protection	Yes
Over voltage protection	Yes

Mechanical data | Material data

Material housing	Plastic
Color housing	black

Mechanical data | Mounting data

Height	140 mm
Width	30 mm
Depth	85,1 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------

Ambient temperature (storage, transport)	-40 °C
--	--------

Connection type 2

Connection type 1	4
-------------------	---

Family construction form	RJ45
--------------------------	------

No. of poles	8
--------------	---

Gender	female
--------	--------

Color contact carrier	black
-----------------------	-------

PIN 1	TD +
-------	------

PIN 2	TD -
-------	------

PIN 3	RD +
-------	------

PIN 4	n.c.
-------	------

PIN 5	n.c.
-------	------

PIN 6	RD -
-------	------

PIN 7	n.c.
-------	------

PIN 8	n.c.
-------	------

Family construction form	terminal
--------------------------	----------

No. of poles	4
--------------	---

Gender	female
--------	--------

Color contact carrier	green
-----------------------	-------

Connection	Spring clamp terminals FK
------------	---------------------------

PIN 1	24 V DC (UB 1)
-------	----------------

PIN 2	0 V
-------	-----

PIN 3	PE
-------	----

PIN 4	n.c.
-------	------