MURR ELEKTRONIK
stay connected

M8 female 0° A-cod. screw terminal

3-pol., 0,14 - 0.5mm², 2,5 - 5mm

Art.No.: 7000-08621-0000000
Weight: 0.012
Country of origin: CN
Model designation: M8 BUCHSE GER. 2,5..5 3pol.

Female straight
M8, 3-pole
Screw terminal
Connection cross section: 0.14...0.5 mm²

Link to Product

Illustration

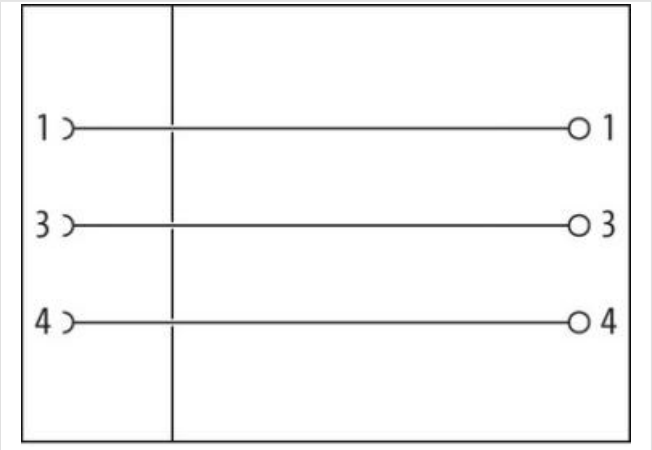

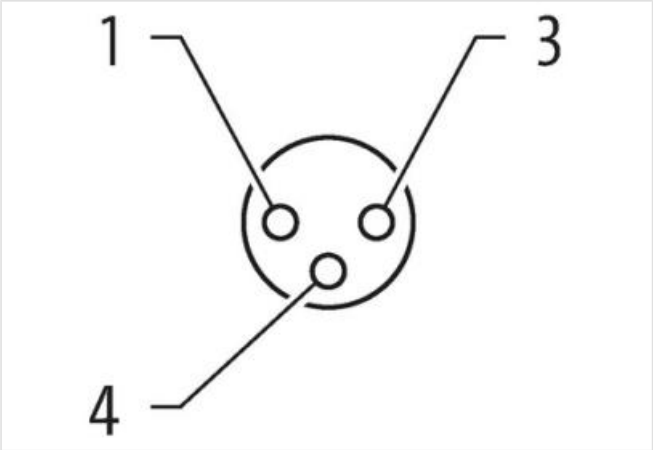

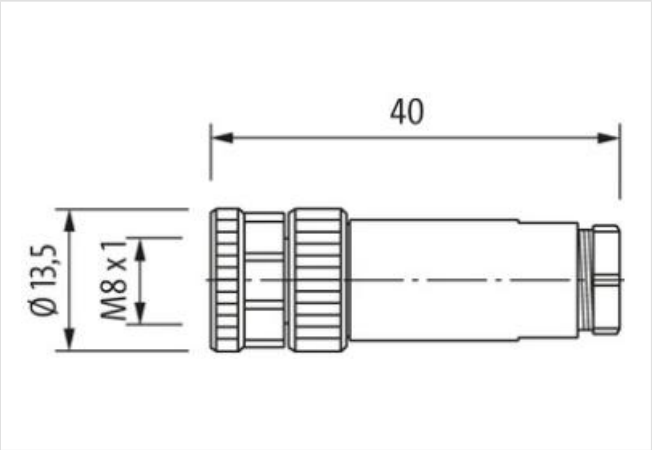

Product may differ from Image

Side 1

Coating contact	gold plated
Family construction form	M8
Material contact	Brass

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-06-16

MURR ELEKTRONIK
stay connected

No. of poles	3
Width across flats	SW13
Degree of protection (EN IEC 60529)	IP67
Commercial data	
ECLASS-6.0	27279221
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-8.0	27440102
ECLASS-9.0	27440116
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ETIM-5.0	EC002635
customs tariff number	85366990
customs tariff number	85366990
EAN	4048879224512
EAN	4048879224512
Packaging unit	1
Packaging unit	1
Electrical data | Supply	
Operating voltage AC max.	50 V
Operating voltage DC max.	60 V
Current operating per contact max.	4 A
Installation	
Connection cross section min.	0,14 mm²
Connection cross section max.	0,5 mm²
Installation | Connection	
Connection	Screw terminals SK
Installation | Pin assignment	
Coding	A
Device protection | Electrical	
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Insulation resistance min.	100 MΩ
Overvoltage category (EN 60664-1)	III
Overvoltage category (EN 60950-1)	II
Mechanical data | Material data	
Material housing	PA
Mechanical data | Mounting data	
Clamping range min.	2,5 mm
Clamping range max.	5 mm
Height	40 mm
Width	13,5 mm
Depth	13,5 mm
Environmental characteristics | Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	85 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-06-16

Note on bending radius	**Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-06-16