


## POTENTIAL TERMINAL BLOCK BR BLUE BR BLUE

Potential terminal block brown/blue/brown/blue

## Link to Product

Illustration

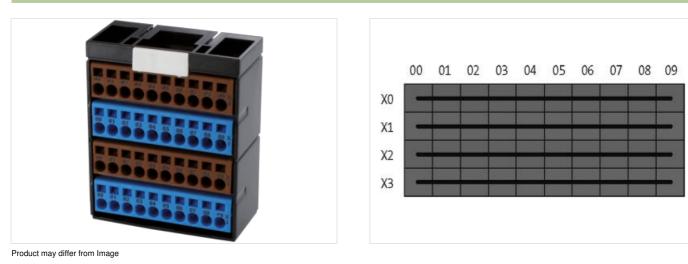



Commercial data	
ECLASS-6.0	27141106
ECLASS-6.1	27141106
ECLASS-7.0	27141106
ECLASS-8.0	27141106
ECLASS-9.0	27141106
ECLASS-10.1	27141106
ECLASS-11.1	27141106
ECLASS-12.0	27141106
ETIM-5.0	EC001283
customs tariff number	85369010
GTIN	4048879049436
Packaging unit	1
Electrical data   Supply	
Operating voltage AC max.	30 V
Operating voltage DC max.	30 V
Total current max.	10 A
Installation	
Connection cross section max.	2,5 mm <sup>2</sup>
AWG number min.	28
AWG number max.	14
Installation   Connection	
Connection	Spring clamp plug-in terminals
Device protection   Electrical	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-01

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com



Degree of protection (EN IEC 60529)	IP20	
Mechanical data   Mounting data		
Height	70 mm	
Width	56 mm	
Depth	32,5 mm	
Environmental characteristics   Climatic		
Operating temperature min.	0 °C	
Operating temperature max.	55 °C	
Storage temperature min.	-40 °C	
Storage temperature max.	85 °C	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-01

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com